



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 170

PowerEdge R415 (AMD Opteron 4176 HE, 2.40 GHz)

SPECfp_rate_base2006 = 156

CPU2006 license: 55


Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Jul-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

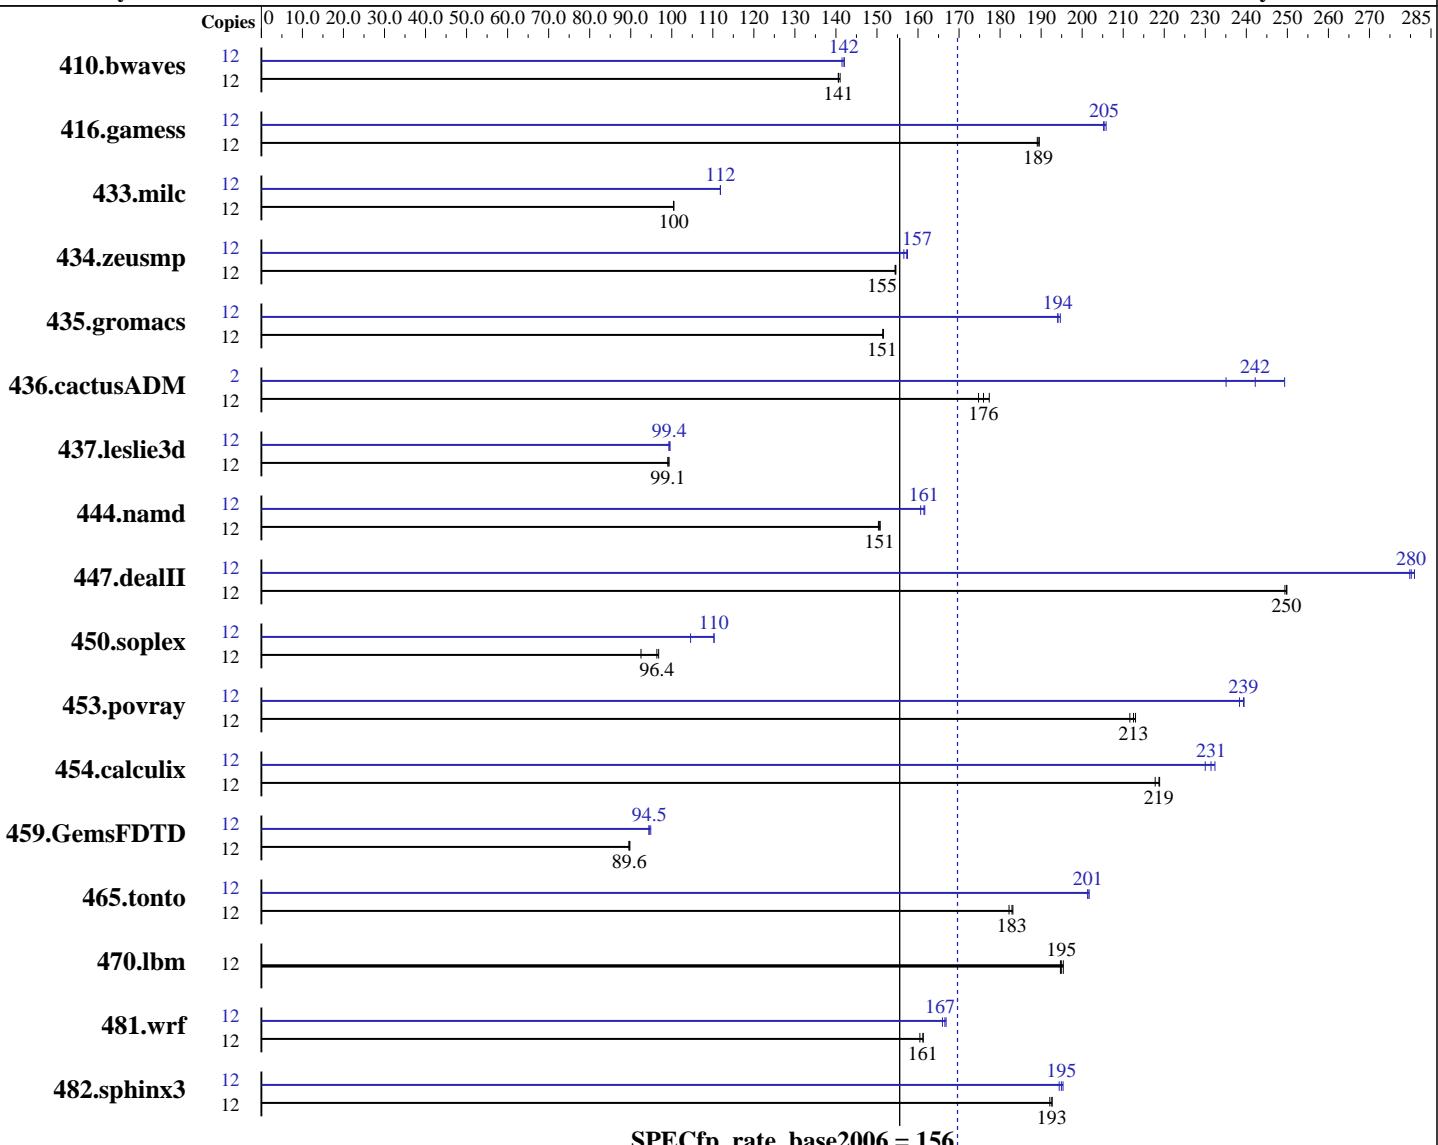

Hardware

CPU Name: AMD Opteron 4176 HE
CPU Characteristics:
CPU MHz: 2400
FPU: Integrated
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 64 KB I + 64 KB D on chip per core
Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
Compiler: Kernel 2.6.27.19-5-default
Auto Parallel: x86 Open64 4.2.4 Compiler Suite (from AMD)
File System: Yes
System State: ext3
Base Pointers: Run level 3 (Full multiuser with network)
Peak Pointers: 64-bit
Other Software: 32/64-bit
None

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 170

PowerEdge R415 (AMD Opteron 4176 HE, 2.40 GHz)

SPECfp_rate_base2006 = 156

CPU2006 license: 55

Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Jul-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	1 x 146 GB 10000 RPM SAS
Other Hardware:	None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1160	141	1156	141	<u>1160</u>	<u>141</u>	12	1153	141	<u>1149</u>	<u>142</u>	1148	142
416.gamess	12	1243	189	<u>1241</u>	<u>189</u>	1239	190	12	1145	205	<u>1144</u>	<u>205</u>	1142	206
433.milc	12	1096	100	<u>1097</u>	<u>100</u>	1097	100	12	985	112	<u>985</u>	<u>112</u>	985	112
434.zeusmp	12	706	155	<u>707</u>	<u>155</u>	707	154	12	<u>694</u>	<u>157</u>	694	157	698	157
435.gromacs	12	565	152	566	151	<u>566</u>	<u>151</u>	12	440	195	441	194	<u>441</u>	<u>194</u>
436.cactusADM	12	<u>815</u>	<u>176</u>	809	177	821	175	2	95.9	249	<u>98.7</u>	<u>242</u>	102	235
437.leslie3d	12	<u>1138</u>	<u>99.1</u>	1135	99.4	1139	99.1	12	1133	99.6	1136	99.3	<u>1135</u>	<u>99.4</u>
444.namd	12	<u>639</u>	<u>151</u>	640	150	638	151	12	<u>596</u>	<u>161</u>	599	161	595	162
447.dealII	12	550	249	549	250	<u>550</u>	<u>250</u>	12	491	280	<u>490</u>	<u>280</u>	489	281
450.soplex	12	1082	92.5	<u>1038</u>	<u>96.4</u>	1034	96.8	12	<u>957</u>	105	907	110	<u>908</u>	<u>110</u>
453.povray	12	302	212	<u>300</u>	<u>213</u>	300	213	12	268	238	<u>267</u>	<u>239</u>	267	239
454.calculix	12	452	219	455	218	<u>453</u>	<u>219</u>	12	426	232	<u>428</u>	<u>231</u>	430	230
459.GemsFDTD	12	1422	89.6	<u>1420</u>	<u>89.6</u>	1418	89.8	12	1342	94.9	1348	94.4	<u>1347</u>	<u>94.5</u>
465.tonto	12	648	182	645	183	<u>646</u>	<u>183</u>	12	586	201	<u>586</u>	<u>201</u>	585	202
470.lbm	12	844	195	847	195	<u>846</u>	<u>195</u>	12	844	195	847	195	<u>846</u>	<u>195</u>
481.wrf	12	<u>832</u>	<u>161</u>	831	161	835	160	12	808	166	<u>805</u>	<u>167</u>	803	167
482.sphinx3	12	1217	192	<u>1214</u>	<u>193</u>	1214	193	12	<u>1197</u>	<u>195</u>	1203	194	<u>1200</u>	<u>195</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
 mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R415 (AMD Opteron 4176 HE, 2.40 GHz)

SPECfp_rate2006 = 170

SPECfp_rate_base2006 = 156

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2010

Hardware Availability: Jul-2010

Software Availability: Jul-2010

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/cpu2006/amd1002-rate-libs-revC/64:/cpu2006/amd1002-rate-libs-revC/32"

OMP_NUM_THREADS = "6"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on SLES10 SP2 with binutils 2.18

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
          -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R415 (AMD Opteron 4176 HE, 2.40 GHz)

SPECfp_rate2006 = 170

CPU2006 license: 55

Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Jul-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

Base Optimization Flags

C benchmarks:

```
-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m
```

C++ benchmarks:

```
-march=barcelona -mso -Ofast -static -INLINE:aggressive=on  
-OPT:malloc_alg=1 -HP:bdt=2m
```

Fortran benchmarks:

```
-march=barcelona -mso -Ofast -HP
```

Benchmarks using both Fortran and C:

```
-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m -HP
```

Peak Compiler Invocation

C benchmarks:

```
opencc
```

C++ benchmarks:

```
openCC
```

Fortran benchmarks:

```
openf95
```

Benchmarks using both Fortran and C:

```
opencc openf95
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
        -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R415 (AMD Opteron 4176 HE, 2.40 GHz)

SPECfp_rate2006 = 170

SPECfp_rate_base2006 = 156

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2010

Hardware Availability: Jul-2010

Software Availability: Jul-2010

Peak Optimization Flags

C benchmarks:

```
433.milc: -march=barcelona -mso -Ofast -CG:movnti=1
           -CG:local_sched_alg=1 -CG:locs_shallow_depth=1
           -HP:bdt=2m:heap=2m -LNO:prefetch=3
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -march=barcelona -mso -fb_create fbdata(pass 1)
              -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
              -CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
              -CG:local_sched_alg=1 -INLINE:aggressive=on
```

C++ benchmarks:

```
444.namd: -march=barcelona -mso -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
           -CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
           -OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m
```

```
447.dealII: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on
             -LNO:opt=0 -fno-emit-exceptions -m32
             -OPT:unroll_times_max=8 -OPT:unroll_size=256
             -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
             -CG:cmp_peep=on -TENV:frame_pointer=off
```

```
450.soplex: -march=barcelona -mso -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
             -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
             -OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
             -CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m
```

```
453.povray: -march=barcelona -mso -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
```

Fortran benchmarks:

```
410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on
             -LNO:blocking=off -LNO:prefetch_ahead=5
             -LNO:ignore_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m
             -CG:cmp_peep=on
```

```
416.gamess: -march=barcelona -mso -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
             -LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
             -HP:bdt=2m:heap=2m
```

```
434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off
             -LNO:interchange=off -OPT:treeheight=on -OPT:unroll_size=256
             -CG:cmp_peep=on -GRA:prioritize_by_density=on -HP
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R415 (AMD Opteron 4176 HE, 2.40 GHz)

SPECfp_rate2006 = 170

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2010
Hardware Availability: Jul-2010
Software Availability: Jul-2010

Peak Optimization Flags (Continued)

```
437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2
    -LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1
    -HP

465.tonto: -march=barcelona -mso -Ofast
    -OPT:alias=no_f90_pointer_alias -LNO:blocking=off
    -CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2
    -HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb_create fbdata(pass 1)
    -fb_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch_ahead=1
    -HP:bdt=2m:heap=2m -LANG:heap_allocation_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load_exe=0
    -CG:ptr_load_use=0 -CG:local_sched_alg=2 -CG:compute_to_on
    -LNO:prefetch_ahead=30 -WOPT:unroll=2
    -GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off
    -LNO:prefetch_ahead=10 -LANG:copyinout=off
    -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -m3dnow
    -HP
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 14:39:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 October 2010.