



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp®2006 = 27.4

PRIMERGY BX620 S6, Intel Xeon L5609, 1.87 GHz

SPECfp_base2006 = 25.8

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2010

Hardware Availability: Aug-2010

Software Availability: Jan-2010

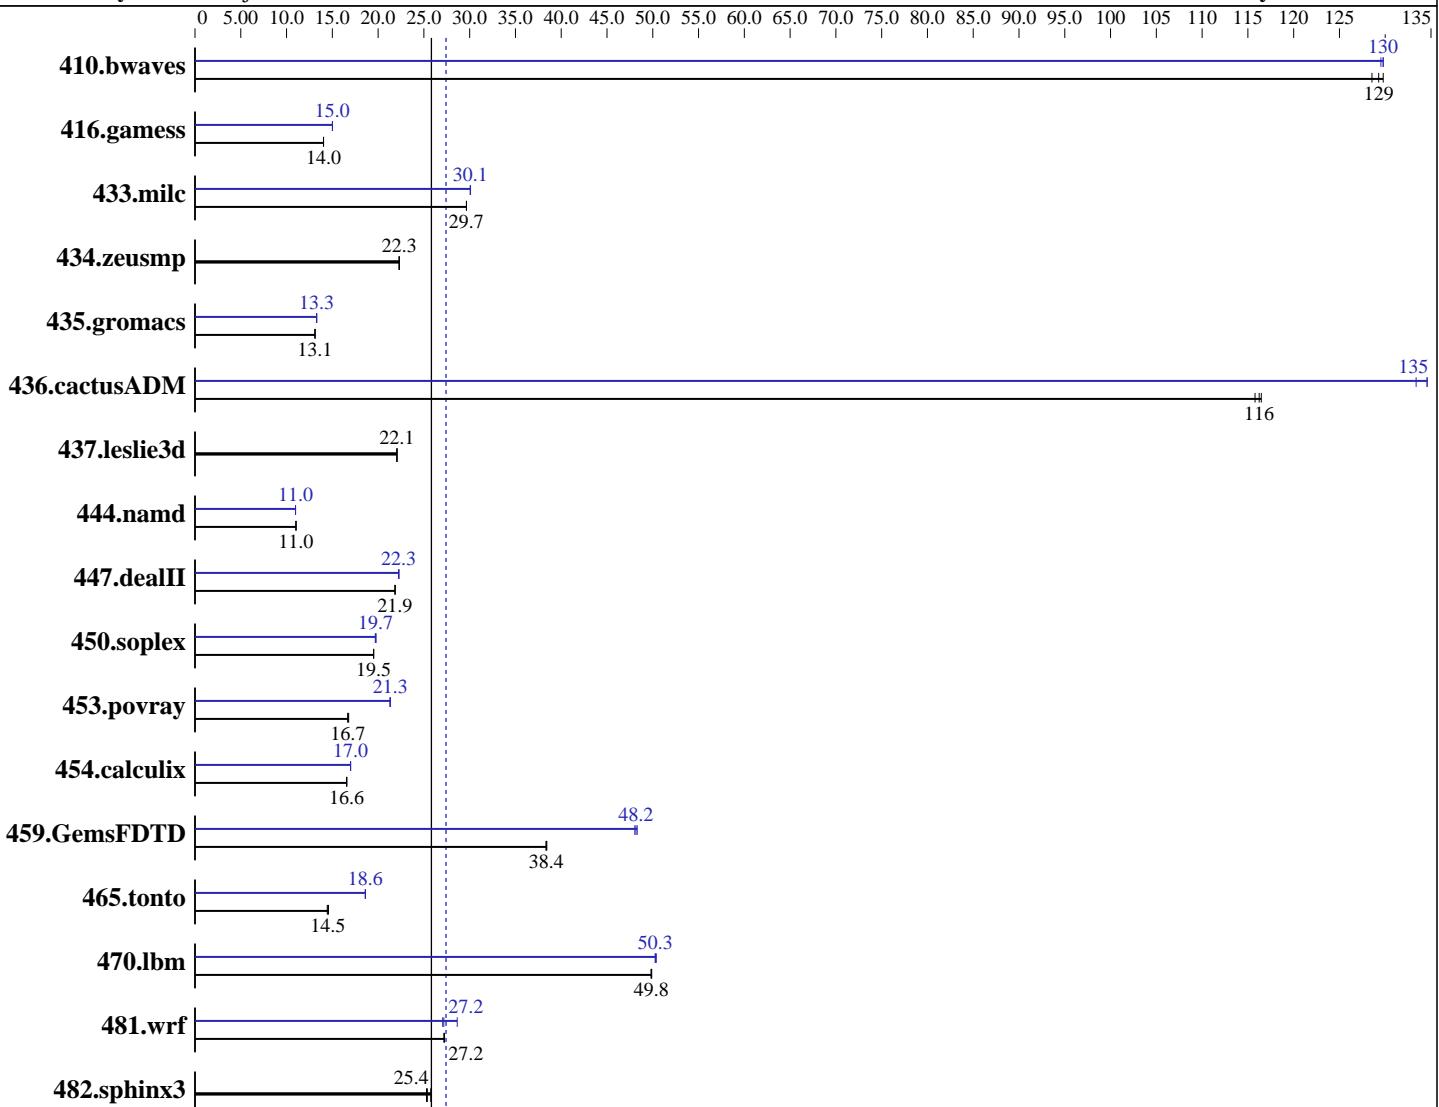

SPECfp_base2006 = 25.8

SPECfp2006 = 27.4

Hardware

CPU Name: Intel Xeon L5609
 CPU Characteristics:
 CPU MHz: 1867
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) with SP1, Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX620 S6, Intel Xeon L5609, 1.87 GHz

SPECfp2006 = 27.4

CPU2006 license: 19

Test date: Sep-2010

Test sponsor: Fujitsu

Hardware Availability: Aug-2010

Tested by: Fujitsu

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R, ECC, running at 1067 MHz and CL7)
 Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM
 Other Hardware: --

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	106	129	105	130	<u>105</u>	<u>129</u>	<u>105</u>	<u>130</u>	105	130	105	130
416.gamess	1394	14.0	<u>1395</u>	<u>14.0</u>	1395	14.0	1304	15.0	<u>1305</u>	<u>15.0</u>	<u>1304</u>	<u>15.0</u>
433.milc	310	29.6	<u>310</u>	<u>29.7</u>	310	29.7	<u>305</u>	<u>30.1</u>	305	30.1	305	30.1
434.zeusmp	<u>408</u>	<u>22.3</u>	408	22.3	408	22.3	<u>408</u>	<u>22.3</u>	408	22.3	408	22.3
435.gromacs	545	13.1	<u>545</u>	<u>13.1</u>	545	13.1	<u>538</u>	<u>13.3</u>	537	13.3	538	13.3
436.cactusADM	103	116	<u>103</u>	<u>116</u>	103	116	89.6	133	88.8	135	<u>88.8</u>	<u>135</u>
437.leslie3d	426	22.1	426	22.0	<u>426</u>	<u>22.1</u>	426	22.1	426	22.0	<u>426</u>	<u>22.1</u>
444.namd	727	11.0	727	11.0	<u>727</u>	<u>11.0</u>	<u>730</u>	<u>11.0</u>	730	11.0	731	11.0
447.dealII	<u>523</u>	<u>21.9</u>	523	21.9	524	21.8	<u>514</u>	<u>22.3</u>	514	22.3	514	22.3
450.soplex	428	19.5	<u>428</u>	<u>19.5</u>	427	19.5	<u>422</u>	<u>19.7</u>	424	19.7	422	19.8
453.povray	317	16.8	319	16.7	<u>318</u>	<u>16.7</u>	<u>249</u>	<u>21.3</u>	250	21.3	249	21.3
454.calculix	498	16.6	498	16.6	<u>498</u>	<u>16.6</u>	485	17.0	<u>486</u>	<u>17.0</u>	486	17.0
459.GemsFDTD	<u>277</u>	<u>38.4</u>	277	38.3	276	38.4	220	48.3	<u>220</u>	<u>48.2</u>	221	48.0
465.tonto	675	14.6	681	14.4	<u>677</u>	<u>14.5</u>	528	18.6	<u>529</u>	<u>18.6</u>	529	18.6
470.lbm	<u>276</u>	<u>49.8</u>	276	49.8	275	49.9	273	50.4	273	50.3	<u>273</u>	<u>50.3</u>
481.wrf	411	27.2	410	27.2	<u>410</u>	<u>27.2</u>	390	28.6	413	27.1	<u>411</u>	<u>27.2</u>
482.sphinx3	757	25.7	<u>768</u>	<u>25.4</u>	771	25.3	<u>757</u>	<u>25.7</u>	<u>768</u>	<u>25.4</u>	771	25.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS configuration:
 Data Reuse Optimization = Disable

General Notes

OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to granularity=fine,scatter
 KMP_STACKSIZE set to 200M

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX620 S6, Intel Xeon L5609, 1.87 GHz

SPECfp2006 = 27.4

CPU2006 license: 19

Test date: Sep-2010

Test sponsor: Fujitsu

Hardware Availability: Aug-2010

Tested by: Fujitsu

Software Availability: Jan-2010

General Notes (Continued)

For information about Fujitsu please visit: <http://www.fujitsu.com>
 Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:

 icc -m64

C++ benchmarks:

 icpc -m64

Fortran benchmarks:

 ifort -m64

Benchmarks using both Fortran and C:

 icc -m64 ifort -m64

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
        433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
        465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX620 S6, Intel Xeon L5609, 1.87 GHz

SPECfp2006 = 27.4

CPU2006 license: 19

Test date: Sep-2010

Test sponsor: Fujitsu

Hardware Availability: Aug-2010

Tested by: Fujitsu

Software Availability: Jan-2010

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -ansi-alias
```

```
470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -parallel -ansi-alias -auto-ilp32
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -auto-ilp32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX620 S6, Intel Xeon L5609, 1.87 GHz

SPECfp2006 =

27.4

SPECfp_base2006 =

25.8

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date:

Sep-2010

Hardware Availability: Aug-2010

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

447.dealII: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias -scalar-rep -auto-ilp32

450.soplex: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -auto-ilp32

453.povray: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsSE4 .2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -opt-prefetch -parallel

465.tonto: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xsSE4 .2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX620 S6, Intel Xeon L5609, 1.87 GHz

SPECfp2006 = 27.4

SPECfp_base2006 = 25.8

CPU2006 license: 19

Test date: Sep-2010

Test sponsor: Fujitsu

Hardware Availability: Aug-2010

Tested by: Fujitsu

Software Availability: Jan-2010

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 14:15:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 October 2010.