SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B230 M1 (Intel Xeon L7555, 1.87 GHz)

SPECint®_rate2006 = 330

SPECint_rate_base2006 = 307

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Aug-2010
Hardware Availability: Sep-2010
Software Availability: Jan-2010

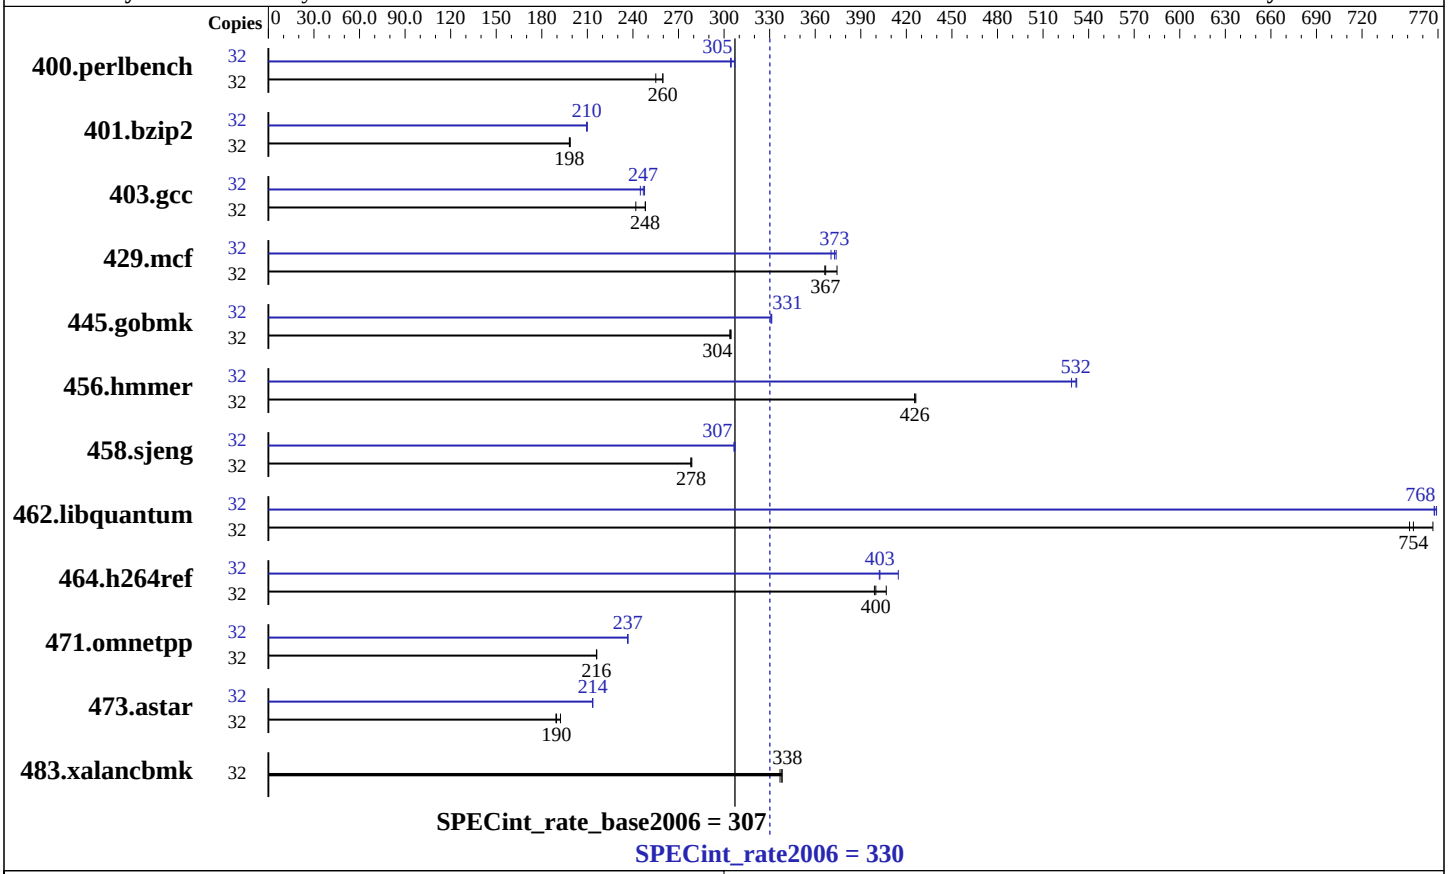

Hardware

CPU Name:	Intel Xeon L7555
CPU Characteristics:	Intel Turbo Boost Technology up to 2.53 GHz
CPU MHz:	1867
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	24 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (32 x 4 GB 2Rx4 PC3L-10600R-9, ECC)
Disk Subsystem:	64 GB SSD, SATA Gen2, 3Gb/s
Other Hardware:	None

Software

Operating System:	SuSe Linux Enterprise Server 11 (x86_64), Kernel 2.6.27-19-5-default
Compiler:	Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap Library V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B230 M1 (Intel Xeon L7555, 1.87 GHz)

SPECint_rate2006 = 330

SPECint_rate_base2006 = 307

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Aug-2010
Hardware Availability: Sep-2010
Software Availability: Jan-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	1226	255	1204	260	**1204**	**260**	32	1018	307	**1026**	**305**	1028	304
401.bzip2	32	**1558**	**198**	1554	199	1558	198	32	1474	210	**1473**	**210**	1471	210
403.gcc	32	**1038**	**248**	1065	242	1038	248	32	1052	245	**1044**	**247**	1040	248
429.mcf	32	**795**	**367**	780	374	797	366	32	**783**	**373**	781	374	788	370
445.gobmk	32	**1104**	**304**	1102	305	1105	304	32	1013	331	**1014**	**331**	1014	331
456.hmmer	32	**702**	**426**	700	426	702	425	32	565	529	561	532	**562**	**532**
458.sjeng	32	**1391**	**278**	1392	278	1389	279	32	**1261**	**307**	1263	306	1261	307
462.libquantum	32	**880**	**754**	883	751	865	767	32	864	767	862	769	**864**	**768**
464.h264ref	32	1741	407	**1771**	**400**	1775	399	32	1761	402	1708	415	**1759**	**403**
471.omnetpp	32	926	216	**925**	**216**	925	216	32	**845**	**237**	845	237	846	236
473.astar	32	1187	189	**1184**	**190**	1168	192	32	1052	214	**1052**	**214**	1053	213
483.xalancbmk	32	**653**	**338**	656	337	653	338	32	**653**	**338**	656	337	653	338

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
ulimit -s unlimited was used to set the stacksize to unlimited prior to run
```

General Notes

```
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

Continued on next page

Base Portability Flags (Continued)

462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs`
`-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

462.libquantum: `icc -m64`

C++ benchmarks (except as noted below):
`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 14:15:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 October 2010.