



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS704DA-E6 (KGMH-D16/QDR) server system
(2.2 GHz AMD Opteron 6174)

SPECfp®_rate2006 = 315

SPECfp_rate_base2006 = 292

CPU2006 license: 9016


Test sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test date: Nov-2010

Hardware Availability: Aug-2010

Software Availability: Oct-2010

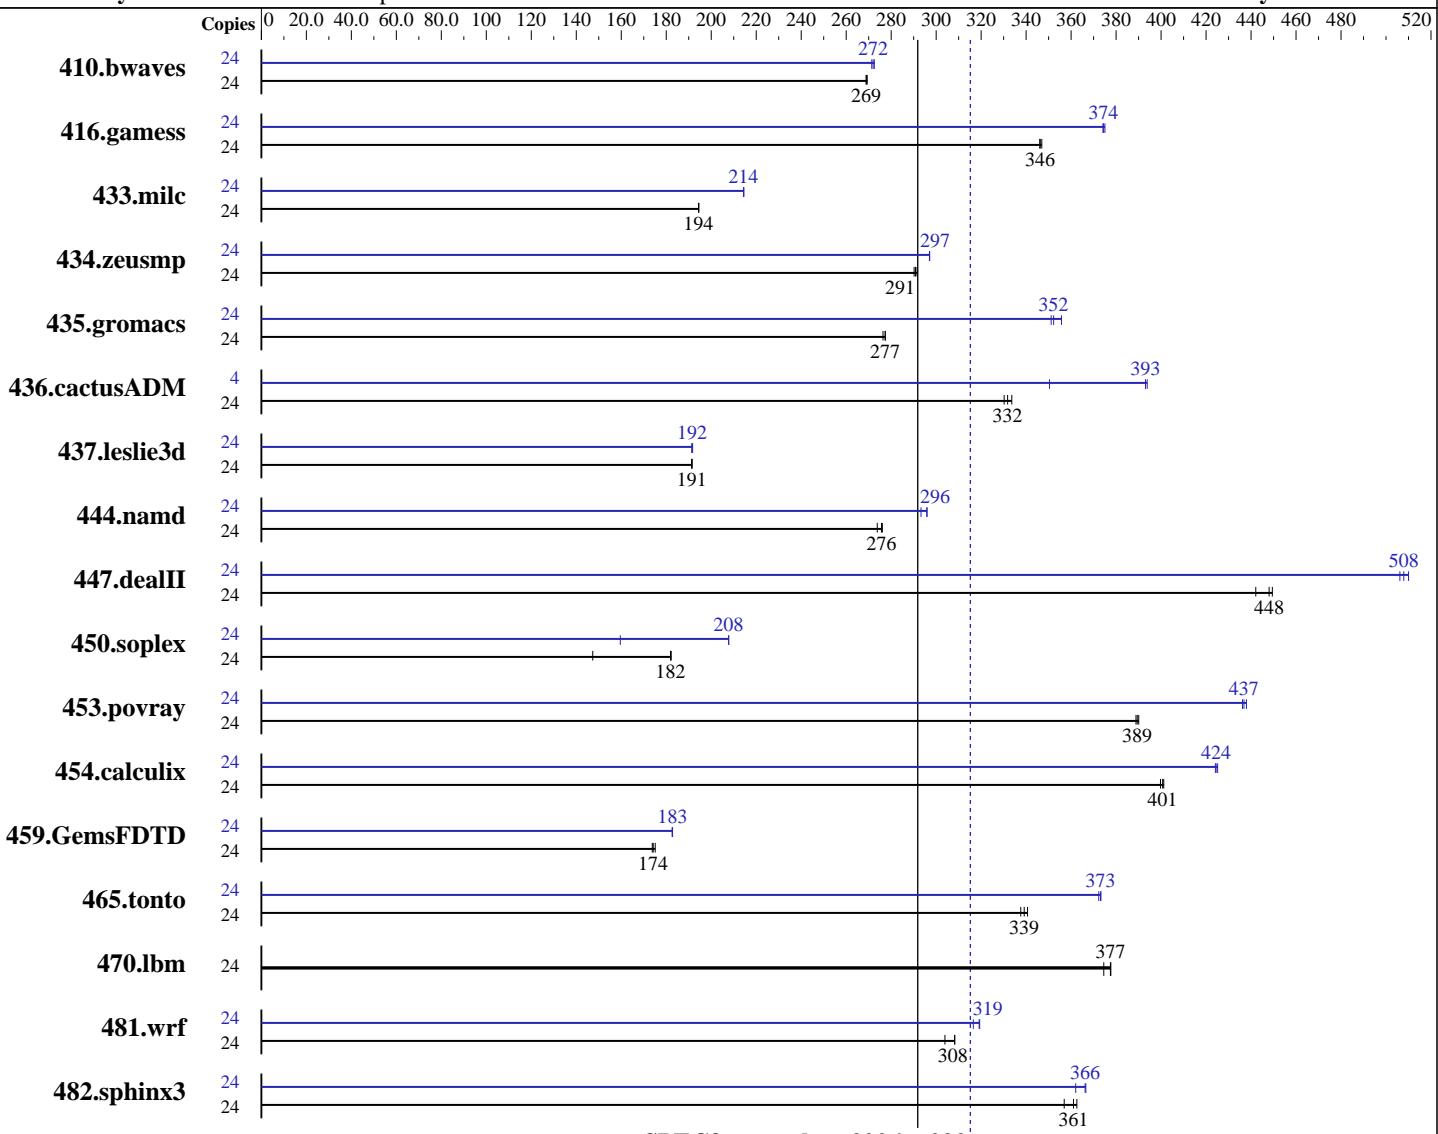

SPECfp_rate_base2006 = 292

SPECfp_rate2006 = 315

Hardware

CPU Name: AMD Opteron 6174
CPU Characteristics:
CPU MHz:
FPU:
CPU(s) enabled: 2200
CPU(s) orderable: Integrated
Primary Cache: 24 cores, 2 chips, 12 cores/chip
Secondary Cache: 1.2 chips
64 KB I + 64 KB D on chip per core
512 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)
Auto Parallel: Yes
File System: ext3
System State: Run level 3 (multiuser)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: binutils 2.18

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS704DA-E6 (KGMH-D16/QDR) server system
(2.2 GHz AMD Opteron 6174)

SPECfp_rate2006 = 315

SPECfp_rate_base2006 = 292

CPU2006 license: 9016

Test date: Nov-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Aug-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Oct-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
Other Cache: None
Memory: 64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: Seagate ST3500320AS 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1213	269	1211	269	1213	269	24	1199	272	1202	271	1197	273
416.gamess	24	1357	346	1354	347	1358	346	24	1255	374	1256	374	1253	375
433.milc	24	1134	194	1133	194	1133	194	24	1028	214	1027	215	1028	214
434.zeusmp	24	753	290	751	291	749	292	24	735	297	735	297	735	297
435.gromacs	24	620	276	618	277	618	277	24	487	352	482	356	488	351
436.cactusADM	24	860	334	869	330	864	332	4	122	393	121	394	136	350
437.leslie3d	24	1178	191	1179	191	1179	191	24	1179	191	1178	192	1177	192
444.namd	24	703	274	697	276	698	276	24	656	293	650	296	651	296
447.dealII	24	613	448	621	442	611	449	24	541	508	542	506	538	510
450.soplex	24	1359	147	1100	182	1098	182	24	1254	160	964	208	963	208
453.povray	24	328	389	327	390	328	389	24	292	437	292	438	293	436
454.calculix	24	494	401	494	401	495	400	24	466	424	467	424	466	425
459.GemsFDTD	24	1454	175	1462	174	1465	174	24	1393	183	1394	183	1394	183
465.tonto	24	696	339	693	341	699	338	24	633	373	633	373	634	372
470.lbm	24	874	377	873	378	880	375	24	874	377	873	378	880	375
481.wrf	24	882	304	870	308	870	308	24	847	317	840	319	839	319
482.sphinx3	24	1310	357	1290	363	1296	361	24	1292	362	1277	366	1276	367

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS704DA-E6 (KGMH-D16/QDR) server system
(2.2 GHz AMD Opteron 6174)

SPECfp_rate2006 = 315

SPECfp_rate_base2006 = 292

CPU2006 license: 9016

Test date: Nov-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Aug-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Oct-2010

Platform Notes

SSI Server Power Supply 600W or higher

System was configured with ASPEED AST2050 VGA (on board VGA)

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/cpu2006/amd1002-rate-libs-revC/64:/cpu2006/amd1002-rate-libs-revC/32"

OMP_NUM_THREADS = "6"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
    -fno-second-underscore
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS704DA-E6 (KGMH-D16/QDR) server system
(2.2 GHz AMD Opteron 6174)

SPECfp_rate2006 = 315

SPECfp_rate_base2006 = 292

CPU2006 license: 9016

Test date: Nov-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Aug-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Oct-2010

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -HP:bdt=2m

Fortran benchmarks:

-march=barcelona -mso -Ofast -HP

Benchmarks using both Fortran and C:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m -HP

Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS704DA-E6 (KGMH-D16/QDR) server system
(2.2 GHz AMD Opteron 6174)

SPECfp_rate2006 = 315

SPECfp_rate_base2006 = 292

CPU2006 license: 9016

Test date: Nov-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Aug-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Oct-2010

Peak Portability Flags (Continued)

```
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
          -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -march=barcelona -mso -Ofast -CG:movnti=1
           -CG:local_sched_alg=1 -CG:locs_shallow_depth=1
           -HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb_create fbdata(pass 1)
              -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
              -CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
              -CG:local_sched_alg=1 -INLINE:aggressive=on
```

C++ benchmarks:

```
444.namd: -march=barcelona -mso -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
           -CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
           -OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on
             -LNO:opt=0 -fno-emit-exceptions -m32
             -OPT:unroll_times_max=8 -OPT:unroll_size=256
             -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
             -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -mso -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
             -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
             -OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
             -CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
```

Fortran benchmarks:

```
410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on
             -LNO:blocking=off -LNO:prefetch_ahead=5
             -LNO:ignore_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS704DA-E6 (KGMH-D16/QDR) server system
(2.2 GHz AMD Opteron 6174)

SPECfp_rate2006 = 315

SPECfp_rate_base2006 = 292

CPU2006 license: 9016

Test date: Nov-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Aug-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Oct-2010

Peak Optimization Flags (Continued)

410.bwaves (continued):

-CG:cmp_peep=on

416.gamess: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll_size=256
-CG:cmp_peep=on -GRA:prioritize_by_density=on -HP

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1
-HP

465.tonto: -march=barcelona -mso -Ofast
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch_ahead=1
-HP:bdt=2m:heap=2m -LANG:heap_allocation_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load_exe=0
-CG:ptr_load_use=0 -CG:local_sched_alg=2 -CG:compute_to=on
-LNO:prefetch_ahead=30 -WOPT:unroll=2
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on -m3dnow
-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS704DA-E6 (KGMH-D16/QDR) server system
(2.2 GHz AMD Opteron 6174)

SPECfp_rate2006 = 315

SPECfp_rate_base2006 = 292

CPU2006 license: 9016

Test date: Nov-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Aug-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Oct-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 14:28:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 November 2010.