



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter PS702 Express (3.0 GHz, 16 core, RedHat)

SPECint®_rate2006 = 521

SPECint_rate_base2006 = 466

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2010

Hardware Availability: Jun-2010

Software Availability: Nov-2010

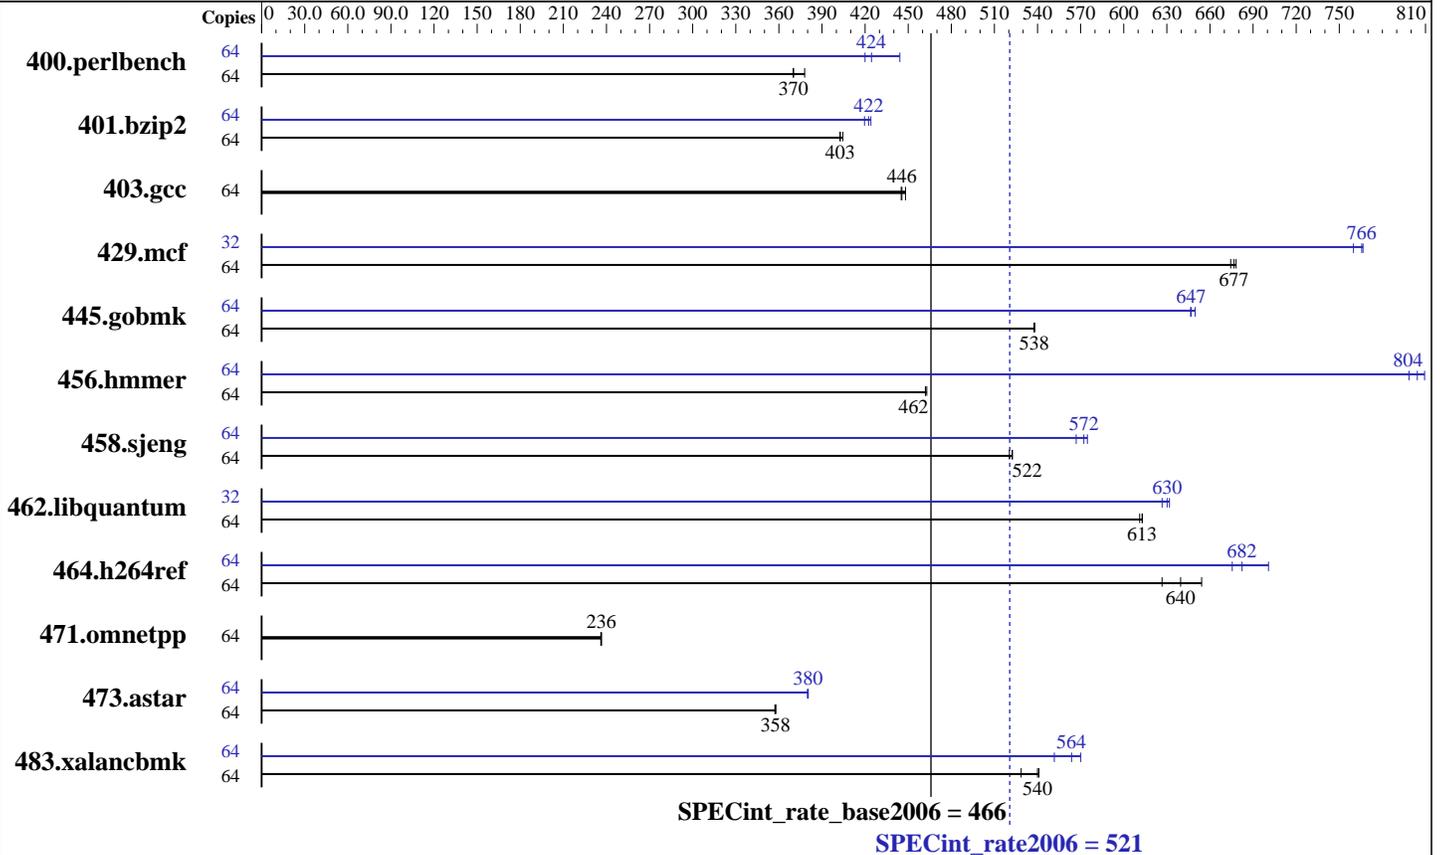

Hardware

CPU Name: POWER7
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.30 GHz
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 4 threads/core
 CPU(s) orderable: 16 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per core
 Other Cache: None
 Memory: 128 GB (32x4 GB) DDR3 1066 MHz
 Disk Subsystem: 1x300 GB SAS SFF 10K RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.0 (ppc64), Kernel 2.6.32-71.el6.ppc64
 Compiler: IBM XL C/C++ for Linux, V11.1 Updated with the Nov2010 PTF
 Auto Parallel: No
 File System: ext3
 System State: Run Level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: -Post-Link Optimization for Linux on POWER, Version 5.5.0-3
 -MicroQuill SmartHeap 9



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter PS702 Express (3.0 GHz, 16 core, RedHat)

SPECint_rate2006 = 521

SPECint_rate_base2006 = 466

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2010

Hardware Availability: Jun-2010

Software Availability: Nov-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1654	378	1690	370	<u>1689</u>	<u>370</u>	64	1489	420	<u>1473</u>	<u>424</u>	1408	444
401.bzip2	64	1527	404	1534	403	<u>1534</u>	<u>403</u>	64	1472	420	<u>1462</u>	<u>422</u>	1457	424
403.gcc	64	1150	448	1157	445	<u>1156</u>	<u>446</u>	64	1150	448	1157	445	<u>1156</u>	<u>446</u>
429.mcf	64	861	678	865	674	<u>862</u>	<u>677</u>	32	384	760	<u>381</u>	<u>766</u>	381	766
445.gobmk	64	<u>1248</u>	<u>538</u>	1248	538	1249	538	64	1033	650	1038	647	<u>1038</u>	<u>647</u>
456.hammer	64	1293	462	1290	463	<u>1292</u>	<u>462</u>	64	738	809	<u>742</u>	<u>804</u>	748	799
458.sjeng	64	<u>1482</u>	<u>522</u>	1488	520	1482	522	64	1366	567	<u>1353</u>	<u>572</u>	1348	575
462.libquantum	64	<u>2164</u>	<u>613</u>	2170	611	2163	613	32	1049	632	<u>1052</u>	<u>630</u>	1058	627
464.h264ref	64	2260	627	2165	654	<u>2214</u>	<u>640</u>	64	2021	701	2097	676	<u>2076</u>	<u>682</u>
471.omnetpp	64	1691	237	<u>1692</u>	<u>236</u>	1694	236	64	1691	237	<u>1692</u>	<u>236</u>	1694	236
473.astar	64	1256	358	1258	357	<u>1256</u>	<u>358</u>	64	<u>1181</u>	<u>380</u>	1183	380	1181	380
483.xalanbmk	64	816	541	835	529	<u>818</u>	<u>540</u>	64	800	552	775	570	<u>783</u>	<u>564</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

IBM Post-Link Optimization tool with options "-O4 -omullX" used for 400.perlbench
options "-O4 -vrox" used for 401.bzip2
options "-O4 -nodp -rtb" used for 403.gcc
options "-O3" used for 429.mcf 445.gobmk 458.sjeng 473.astar
options "-O4 -nodp -m power7" used for 456.hammer
options "-O4 -vrox -nodp" used for 462.libquantum
options "-O4 -vrox -nodp -rtb" used for 464.h264ref
options "-O3 -lu -l -nodp -sdp 9" used for 471.omnetpp
options "-O3 -m power7" used for 483.xalanbmk
Whenever option "-omullX" was used during the optimization phase, option "-imullX" was also used during the instrumentation phase.

Submit Notes

The config file option 'submit' was used.
Benchmarks bound to a processor using numactl on the submit command.



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter PS702 Express (3.0 GHz, 16 core, RedHat)

SPECint_rate2006 = 521

SPECint_rate_base2006 = 466

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2010

Hardware Availability: Jun-2010

Software Availability: Nov-2010

Operating System Notes

ulimit -s (stack) set to 1048576.

Large pages reserved as follows by root user:

```
echo 4224 > /proc/sys/vm/nr_hugepages
```

The following environment variables were set before the runspec command:

```
XLFRTEOPTS=intrinths=1
```

```
HUGETLB_VERBOSE=0
```

```
HUGETLB_MORECORE=yes
```

```
HUGETLB_ELFMAP=RW
```

Base Compiler Invocation

C benchmarks:

```
xlc -qlanglvl=extc99
```

C++ benchmarks:

```
xlC
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_PPC
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
464.h264ref: -qchars=signed
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-O5 -qarch=pwr7 -qtune=pwr7 -qalias=noansi -qalloca -lhugetlbfs
```

C++ benchmarks:

```
-O5 -qarch=pwr7 -qtune=pwr7 -qrtti -lsmartheap
```

Base Other Flags

C benchmarks:

```
-qipa=threads
```

C++ benchmarks:

```
-qipa=threads
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter PS702 Express (3.0 GHz, 16 core, RedHat)

SPECint_rate2006 = 521

SPECint_rate_base2006 = 466

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Oct-2010
Hardware Availability: Jun-2010
Software Availability: Nov-2010

Peak Compiler Invocation

C benchmarks:
xlc -qlanglvl=extc99

C++ benchmarks:
xlC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_PPC
462.libquantum: -DSPEC_CPU_LINUX
464.h264ref: -qchars=signed
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7 -qtune=pwr7 -qalias=noansi -qipa=level=2 -lsmartheap

401.bzip2: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=pwr7 -qtune=pwr7 -lhugetlbfs

403.gcc: basepeak = yes

429.mcf: -Wl,-q -O5 -qarch=pwr7 -qtune=pwr7 -lhugetlbfs

445.gobmk: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7 -qtune=pwr7 -lhugetlbfs

456.hmmcr: -Wl,-q -O5 -qarch=pwr7 -qtune=pwr7 -qsimd -qassert=refalign -qipa=inline=threshold=2888 -qipa=inline=limit=11880 -lhugetlbfs

458.sjeng: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7 -qtune=pwr7 -lhugetlbfs

462.libquantum: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7 -qtune=pwr7 -q64 -lhugetlbfs

464.h264ref: Same as 458.sjeng

C++ benchmarks:

471.omnetpp: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 521

IBM BladeCenter PS702 Express (3.0 GHz, 16 core, RedHat)

SPECint_rate_base2006 = 466

CPU2006 license: 11

Test date: Oct-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Nov-2010

Peak Optimization Flags (Continued)

473.astar: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7
-qtune=pwr7 -lhugetlbfs -lsmartheap

483.xalancbmk: -Wl,-q -O4 -qarch=pwr7 -qtune=pwr7 -qipa=partition=large
-lsmartheap

Peak Other Flags

C benchmarks (except as noted below):

-qipa=threads

C++ benchmarks:

-qipa=threads

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20101123.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20101123.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 14:29:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 November 2010.