



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 279

ProLiant BL620c G7
(2.27 GHz, Intel Xeon X7560)

SPECfp_rate_base2006 = 267

CPU2006 license: 3


Test date: Oct-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2010

Tested by: Hewlett-Packard Company

Software Availability: Apr-2010

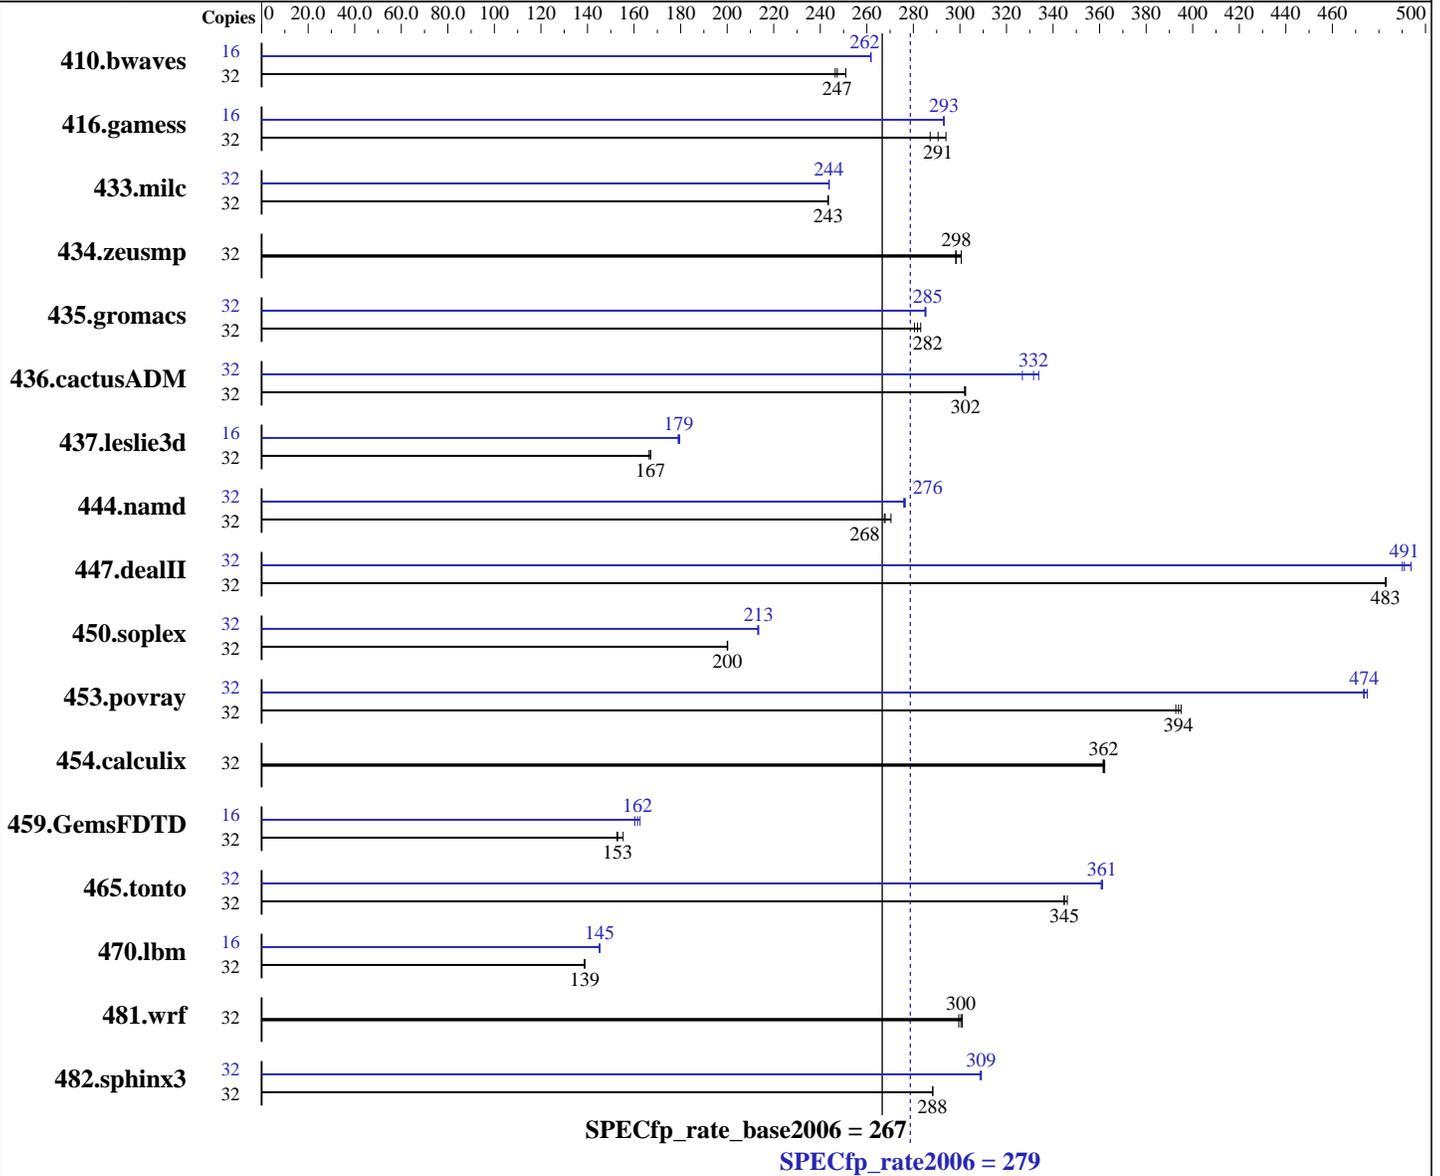

Hardware

CPU Name: Intel Xeon X7560
 CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.5
 Kernel 2.6.18-194.el5
 Compiler: Intel C++ and Fortran Compiler 11.1 for Linux
 Build 20100414 Package ID: l_cproc_p_11.1.072,
 l_cprof_p_11.1.072
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 279

ProLiant BL620c G7
(2.27 GHz, Intel Xeon X7560)

SPECfp_rate_base2006 = 267

CPU2006 license: 3

Test date: Oct-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2010

Tested by: Hewlett-Packard Company

Software Availability: Apr-2010

L3 Cache: 24 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (32 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1x146 GB 10 K SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.50.0.6-14.el5

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1758	247	1765	246	1733	251	16	831	262	831	262	831	262
416.gamess	32	2182	287	2156	291	2131	294	16	1069	293	1069	293	1069	293
433.milc	32	1207	243	1208	243	1207	243	32	1205	244	1205	244	1205	244
434.zeusmp	32	969	301	977	298	976	298	32	969	301	977	298	976	298
435.gromacs	32	811	282	807	283	815	280	32	801	285	801	285	802	285
436.cactusADM	32	1265	302	1266	302	1265	302	32	1153	332	1170	327	1145	334
437.leslie3d	32	1800	167	1800	167	1807	166	16	840	179	839	179	837	180
444.namd	32	958	268	959	268	949	270	32	929	276	928	277	930	276
447.dealII	32	758	483	758	483	758	483	32	746	491	741	494	747	490
450.soplex	32	1334	200	1333	200	1334	200	32	1250	213	1252	213	1250	213
453.povray	32	433	393	431	395	432	394	32	359	474	358	475	360	473
454.calculix	32	730	362	730	362	729	362	32	730	362	730	362	729	362
459.GemsFDTD	32	2224	153	2186	155	2219	153	16	1044	163	1051	162	1059	160
465.tonto	32	913	345	913	345	910	346	32	873	361	872	361	872	361
470.lbm	32	3169	139	3168	139	3168	139	16	1514	145	1514	145	1515	145
481.wrf	32	1188	301	1190	300	1193	299	32	1188	301	1190	300	1193	299
482.sphinx3	32	2164	288	2163	288	2164	288	32	2021	309	2017	309	2017	309

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS configuration:
HP Power Profile set to Maximum Performance
Thermal Configuration set to Increased Cooling



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 279

ProLiant BL620c G7
(2.27 GHz, Intel Xeon X7560)

SPECfp_rate_base2006 = 267

CPU2006 license: 3

Test date: Oct-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2010

Tested by: Hewlett-Packard Company

Software Availability: Apr-2010

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 279

ProLiant BL620c G7
(2.27 GHz, Intel Xeon X7560)

SPECfp_rate_base2006 = 267

CPU2006 license: 3

Test date: Oct-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2010

Tested by: Hewlett-Packard Company

Software Availability: Apr-2010

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/Compiler/11.1/072/bin/intel64/icpc -m32

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 279

ProLiant BL620c G7
(2.27 GHz, Intel Xeon X7560)

SPECfp_rate_base2006 = 267

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2010
Hardware Availability: Nov-2010
Software Availability: Apr-2010

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 279

ProLiant BL620c G7
(2.27 GHz, Intel Xeon X7560)

SPECfp_rate_base2006 = 267

CPU2006 license: 3

Test date: Oct-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2010

Tested by: Hewlett-Packard Company

Software Availability: Apr-2010

Peak Optimization Flags (Continued)

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revF.20100511.html>

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20100525.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revF.20100511.xml>

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20100525.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 14:28:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 November 2010.