



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECint®2006 = 24.6**

Gateway GR380 F1 (Intel Xeon E5507)

**SPECint\_base2006 = 22.5**

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Nov-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

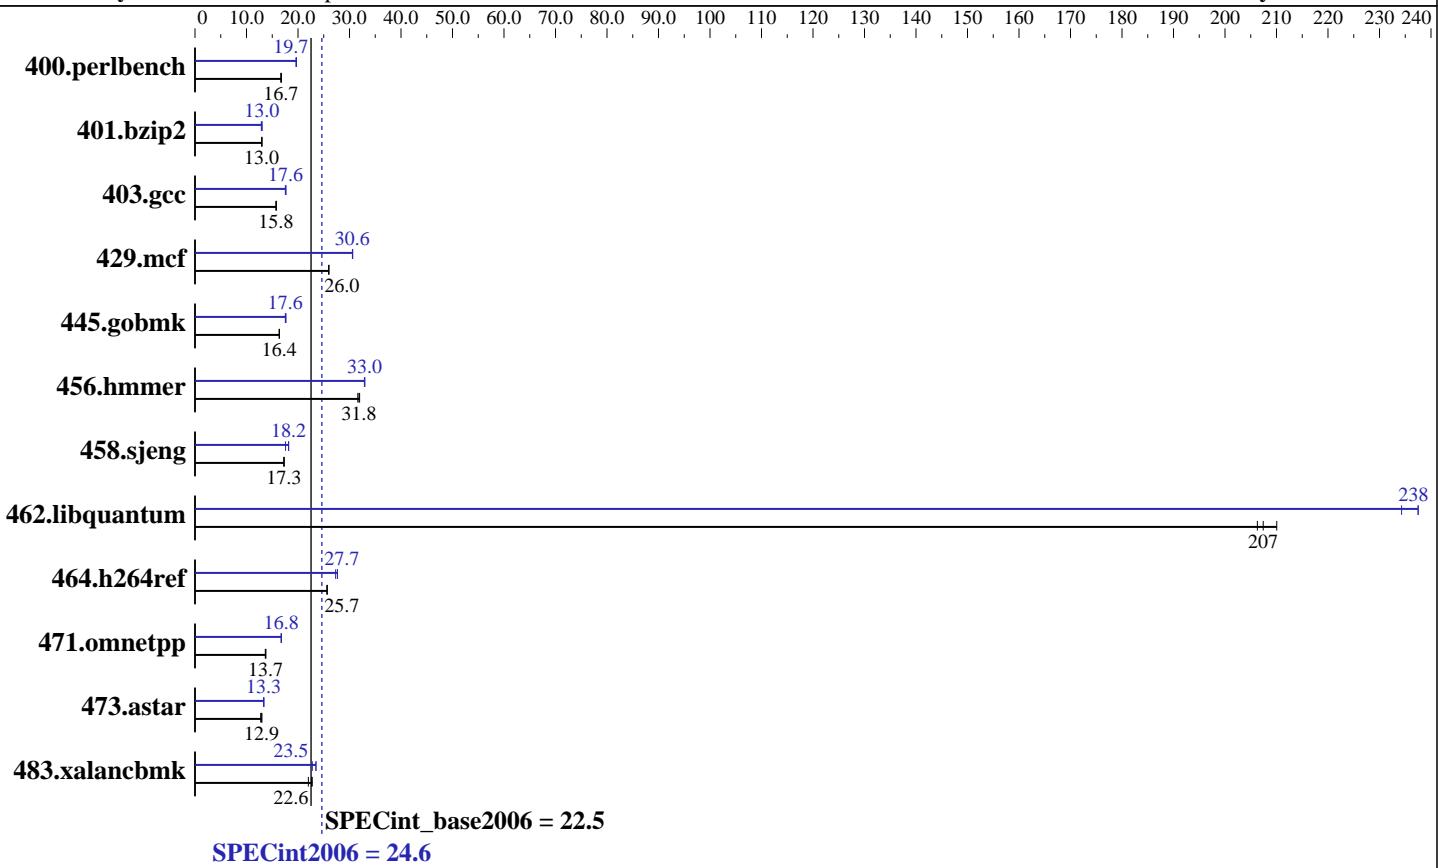

## Hardware

CPU Name:	Intel Xeon E5507
CPU Characteristics:	
CPU MHz:	2267
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	4 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (12 x 4 GB 2Rx8 PC3-10600R-9, ECC)
Disk Subsystem:	1 x 300 GB 10000RPM SATA HDD
Other Hardware:	None

## Software

Operating System:	SUES Linux Enterprise Server 11 (x86_64)
Compiler:	Kernel 2.6.27.19-5-default
	Intel C++ Professional Compiler for IA32 and
	Intel 64, Version 11.1
	Build 20091130 Package ID: l_cproc_p_11.1.064
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1
	Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECint2006 = 24.6**

Gateway GR380 F1 (Intel Xeon E5507)

**SPECint\_base2006 = 22.5**

CPU2006 license: 97

Test date: Nov-2010

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>584</b>	<b>16.7</b>	586	16.7	582	16.8	<b>496</b>	<b>19.7</b>	<b>496</b>	<b>19.7</b>	498	19.6
401.bzip2	742	13.0	745	13.0	<b>744</b>	<b>13.0</b>	741	13.0	<b>743</b>	<b>13.0</b>	749	12.9
403.gcc	511	15.8	511	15.7	<b>511</b>	<b>15.8</b>	<b>458</b>	<b>17.6</b>	459	17.5	455	17.7
429.mcf	352	25.9	351	26.0	<b>351</b>	<b>26.0</b>	298	30.6	298	30.6	<b>298</b>	<b>30.6</b>
445.gobmk	<b>640</b>	<b>16.4</b>	642	16.4	640	16.4	<b>598</b>	<b>17.6</b>	593	17.7	598	17.6
456.hammer	292	32.0	295	31.6	<b>293</b>	<b>31.8</b>	284	32.9	<b>283</b>	<b>33.0</b>	283	33.0
458.sjeng	700	17.3	701	17.3	<b>700</b>	<b>17.3</b>	665	18.2	<b>666</b>	<b>18.2</b>	688	17.6
462.libquantum	98.6	210	100	206	<b>99.9</b>	<b>207</b>	87.2	238	<b>87.2</b>	<b>238</b>	88.4	234
464.h264ref	862	25.7	<b>863</b>	<b>25.7</b>	863	25.6	811	27.3	<b>800</b>	<b>27.7</b>	800	27.7
471.omnetpp	458	13.6	455	13.7	<b>455</b>	<b>13.7</b>	<b>373</b>	<b>16.8</b>	373	16.8	374	16.7
473.astar	550	12.8	541	13.0	<b>542</b>	<b>12.9</b>	526	13.3	525	13.4	<b>526</b>	<b>13.3</b>
483.xalancbmk	303	22.8	<b>305</b>	<b>22.6</b>	313	22.0	303	22.8	<b>294</b>	<b>23.5</b>	294	23.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

OMP\_NUM\_THREADS set to number of cores

KMP\_AFFINITY set to granularity=fine,scatter

This result was measured on the Gateway GR360 F1.

The Acer AR360, Acer AR380 F1, Gateway GR360 F1 and Gateway GR380 F1 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECint2006 = 24.6**

Gateway GR380 F1 (Intel Xeon E5507)

**SPECint\_base2006 = 22.5**

CPU2006 license: 97

**Test date:** Nov-2010

Test sponsor: Acer Incorporated

**Hardware Availability:** Mar-2010

Tested by: Acer Incorporated

**Software Availability:** Jan-2010

## Base Portability Flags (Continued)

464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECint2006 = 24.6**

Gateway GR380 F1 (Intel Xeon E5507)

**SPECint\_base2006 = 22.5**

CPU2006 license: 97

Test date: Nov-2010

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

## Peak Portability Flags (Continued)

```

401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)
               -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
               -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12
               -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -unroll4

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
                  -opt-prefetch -par-schedule-static=32768 -ansi-alias

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -unroll12 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
               -L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-32bit -lsmartheap

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECint2006 = 24.6**

Gateway GR380 F1 (Intel Xeon E5507)

**SPECint\_base2006 = 22.5**

CPU2006 license: 97

Test date: Nov-2010

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

```
483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
                 -Wl,-z,muldefs
                 -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revH.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revH.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 13:42:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 December 2010.