SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M4000

SPECint®2006 = 14.8

SPECint_base2006 = 13.4

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Oct-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

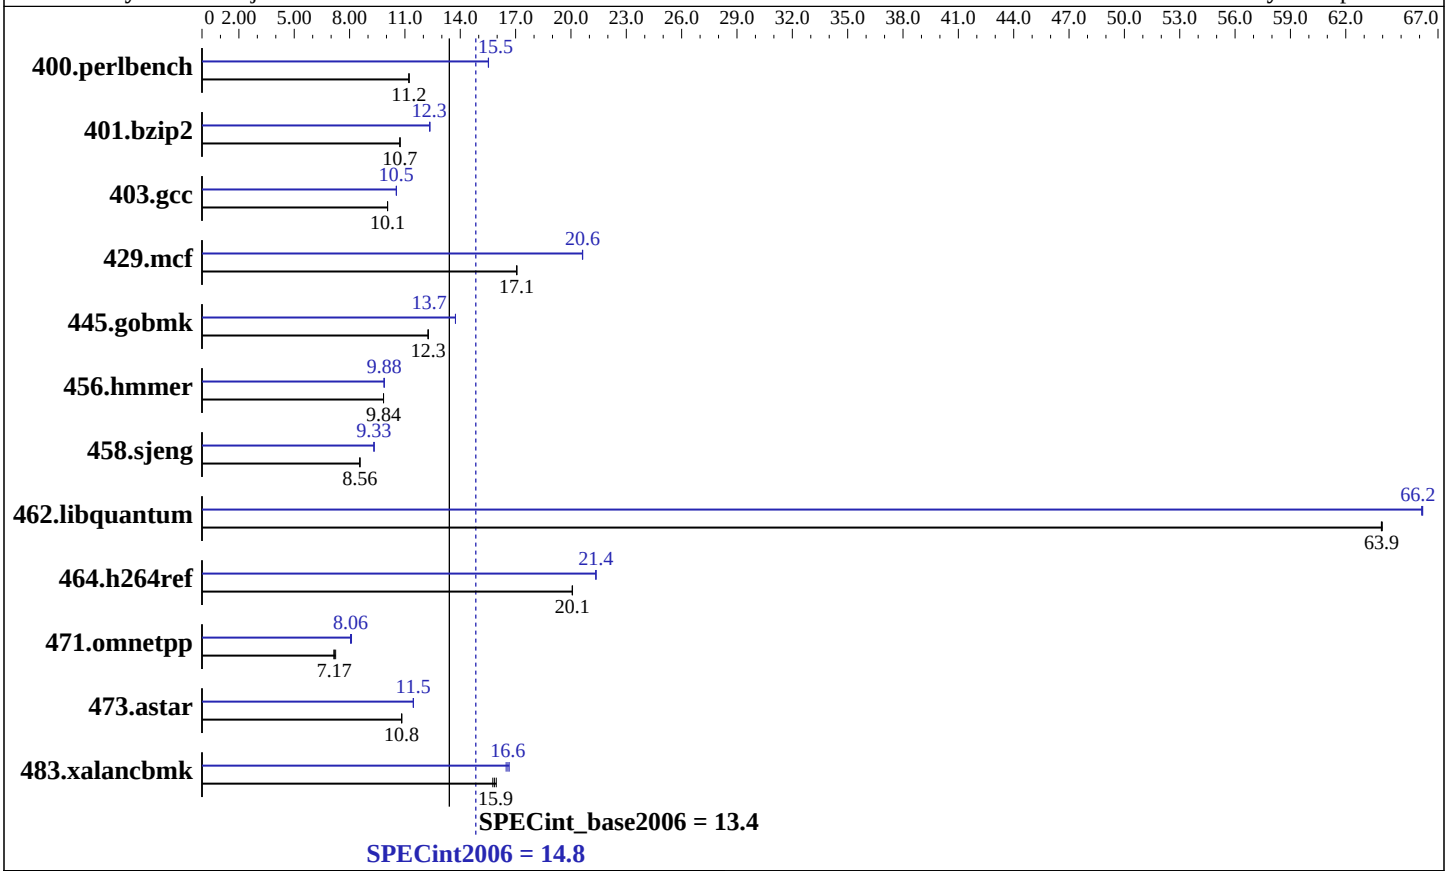

Hardware

CPU Name:	SPARC64 VII+
CPU Characteristics:	
CPU MHz:	2660
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 to 2 CPUMs; each CPUM contains 2 CPU chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	11 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	128 GB (32 x 4 GB, 8-way interleaved)
Disk Subsystem:	1 x 300 GB 10,000 RPM SAS
Other Hardware:	None

Software

Operating System:	Oracle Solaris 10 9/10
Compiler:	Oracle Solaris Studio 12.2
Auto Parallel:	No
File System:	ufs
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M4000

SPECint2006 = 14.8

SPECint_base2006 = 13.4

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Oct-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	871	11.2	**871**	**11.2**	870	11.2	**629**	**15.5**	629	15.5	629	15.5
401.bzip2	**899**	**10.7**	899	10.7	899	10.7	781	12.4	**782**	**12.3**	782	12.3
403.gcc	**800**	**10.1**	800	10.1	800	10.1	**764**	**10.5**	765	10.5	764	10.5
429.mcf	534	17.1	**534**	**17.1**	535	17.1	**442**	**20.6**	442	20.6	442	20.6
445.gobmk	**856**	**12.3**	856	12.3	856	12.3	763	13.7	**763**	**13.7**	763	13.7
456.hmmer	**948**	**9.84**	948	9.84	948	9.84	945	9.88	**945**	**9.88**	945	9.88
458.sjeng	1415	8.55	**1414**	**8.56**	1413	8.56	**1297**	**9.33**	1298	9.32	1297	9.33
462.libquantum	324	64.0	324	63.9	**324**	**63.9**	313	66.1	313	66.2	**313**	**66.2**
464.h264ref	**1102**	**20.1**	1102	20.1	1103	20.1	**1036**	**21.4**	1036	21.4	1036	21.4
471.omnetpp	874	7.15	863	7.24	**871**	**7.17**	**775**	**8.06**	776	8.05	771	8.10
473.astar	**649**	**10.8**	649	10.8	648	10.8	613	11.5	613	11.5	**613**	**11.5**
483.xalancbmk	**435**	**15.9**	438	15.8	433	16.0	**416**	**16.6**	414	16.7	419	16.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
Oracle Solaris Studio 12.2 is distributed with mandatory OS patches
 118683-05  119963-20  120753-08
Oracle Solaris Studio 12.2 and patches are available at
 http://oracle.com/goto/solarisstudio
```

Submit Notes

```
Processes were assigned to specific processors using 'pbind'
commands.  The config file option 'submit' was used, along
with a list of processors in the 'BIND' variable, to generate
the pbind commands.  (For details, please see the config file.)
```

Operating System Notes

```
Shell Environments:

    ulimit -s 131072 was used to limit the space consumed
    by the stack.(making more space available for the heap)

System Tunables:
(/etc/system parameters)

    tune_t_fsflushr=10
       Controls how many seconds elapse between runs of the
```

Continued on next page

Operating System Notes (Continued)

```
        page flush daemon, fsflush.
     autoup=600
        Causes pages older than the listed number of seconds to
        be written by fsflush.

Other System Settings:

    The webconsole service was turned off using svcadm disable webconsole.
```

Platform Notes

```
 Memory is 8-way interleaved by filling all slots with
 the same capacity DIMMs.

 This result is measured on a SPARC Enterprise M4000 server from
 Fujitsu.  The SPARC Enterprise M4000 server from Oracle and from
 Fujitsu are electrically equivalent.
```

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:
-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=2
-xalias_level=std -M /usr/lib/ld/map.bssalign -ll2amm

C++ benchmarks:
-xdepend -library=stlport4 -fast -fma=fused -xipo=2 -xpagesize=4M
-xprefetch_level=2 -xalias_level=compatible -M /usr/lib/ld/map.bssalign
-lfast

Base Other Flags

C benchmarks:
```
-xjobs=2 -V -#
```

C++ benchmarks:
```
-xjobs=2 -verbose=diags,version
```

Peak Compiler Invocation

C benchmarks:
```
cc
```

C++ benchmarks:
```
CC
```

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_SOLARIS_SPARC`
403.gcc: `-DSPEC_CPU_SOLARIS`
462.libquantum: `-DSPEC_CPU_SOLARIS`
483.xalancbmk: `-DSPEC_CPU_SOLARIS`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xprofile=collect:./feedback`(pass 1)
`-xprofile=use:./feedback`(pass 2) `-fast -fma=fused`
`-xpagesize=4M -M /usr/lib/ld/map.bssalign -xipo=2`
`-xalias_level=std -xrestrict -Xc -xprefetch=no%auto`
`-xarch=generic -lfast`

401.bzip2: `-xprofile=collect:./feedback`(pass 1)
`-xprofile=use:./feedback`(pass 2) `-fast -fma=fused`
`-xpagesize=4M -xalias_level=strong -xchip=generic`

403.gcc: `-xprofile=tcov:./feedback`(pass 1)
`-xprofile=use:./feedback`(pass 2) `-fast -fma=fused`
`-xpagesize=4M -xipo=2 -xalias_level=std -xO4`
`-xchip=generic -xunroll=7 -ll2amm`

429.mcf: `-fast -fma=fused -xpagesize=4M -xipo=2`
`-xprefetch=latx:0.5 -xprefetch_level=3`
`-xprefetch_auto_type=indirect_array_access -xchip=generic`
`-xlinkopt -xunroll=7 -W2,-Apf:llist=3`
`-W2,-Apf:noinnerllist -Wc,-Qlp-prt=1 -Wc,-Qlp-prwt=3`

Continued on next page

Peak Optimization Flags (Continued)

429.mcf (continued):
-lfast

445.gobmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xalias_level=std -xrestrict
-xprefetch=latx:0.5 -ll2amm

456.hmmer: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xipo=2

458.sjeng: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xipo=2 -xO4 -xlinkopt -xunroll=2 -ll2amm

462.libquantum: -fast -fma=fused -xpagesize=4M -xalias_level=std -xipo=2
-xprefetch=no%auto -xO4 -xarch=generic -xcache=generic
-xlinkopt=2 -xunroll=8

464.h264ref: -xprofile=tcov:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xipo=2 -xalias_level=std -xlinkopt=2
-ll2amm

C++ benchmarks:

471.omnetpp: -xdepend -library=stlport4
-xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xalias_level=compatible -xipo=2
-xprefetch_level=2 -Qoption cg -Qlp-av=0 -lfast

473.astar: -xdepend -library=stlport4
-xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xalias_level=compatible
-M /usr/lib/ld/map.bssalign -xipo=2 -xprefetch=no%auto
-xarch=v8plusb -lfast -lbsdmalloc

483.xalancbmk: -xdepend -library=stlport4
-xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xalias_level=compatible -xipo=2
-xprefetch=no -lfast

Peak Other Flags

C benchmarks:
```
-xjobs=2 -V -#
```

C++ benchmarks:
```
-xjobs=2 -verbose=diags,version
```

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:52:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 December 2010.