SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S6, Intel Xeon E5606, 2.13 GHz

SPECfp®_rate2006 = 73.2

SPECfp_rate_base2006 = 70.5

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jan-2011
Hardware Availability: Jul-2010
Software Availability: Nov-2010

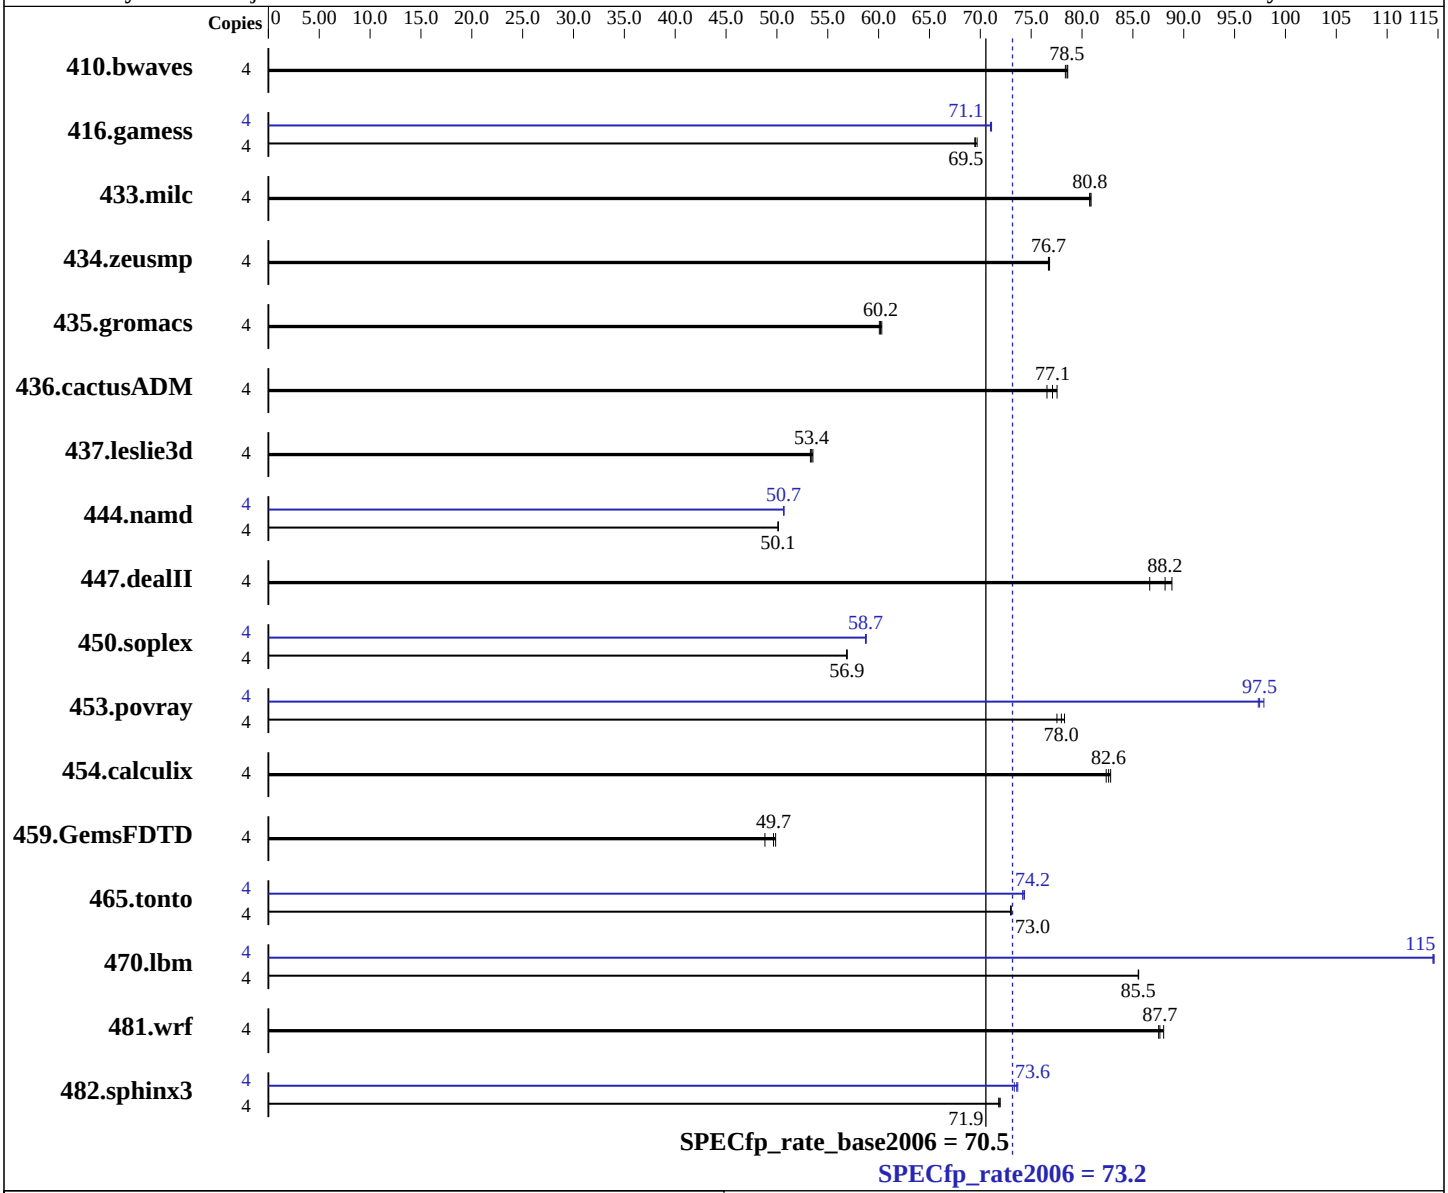

Hardware

CPU Name:	Intel Xeon E5606
CPU Characteristics:	
CPU MHz:	2133
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) with SP1, Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.0.082 Build 20101006
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S6, Intel Xeon E5606, 2.13 GHz

SPECfp_rate2006 = 73.2

SPECfp_rate_base2006 = 70.5

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jan-2011
Hardware Availability: Jul-2010
Software Availability: Nov-2010

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6 x 4 GB 2Rx4 PC3-10600R-9, ECC, running at 1067 MHz and CL7)
Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM
Other Hardware: --

Peak Pointers: 32/64-bit
Other Software: none

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	694	78.4	692	78.6	**692**	**78.5**	4	694	78.4	692	78.6	**692**	**78.5**
416.gamess	4	**1127**	**69.5**	1128	69.5	1124	69.7	4	1103	71.0	1101	71.1	**1102**	**71.1**
433.milc	4	**454**	**80.8**	455	80.7	454	80.9	4	**454**	**80.8**	455	80.7	454	80.9
434.zeusmp	4	**474**	**76.7**	475	76.7	474	76.8	4	**474**	**76.7**	475	76.7	474	76.8
435.gromacs	4	475	60.1	**475**	**60.2**	474	60.3	4	475	60.1	**475**	**60.2**	474	60.3
436.cactusADM	4	**620**	**77.1**	624	76.6	616	77.5	4	**620**	**77.1**	624	76.6	616	77.5
437.leslie3d	4	**704**	**53.4**	706	53.3	702	53.5	4	**704**	**53.4**	706	53.3	702	53.5
444.namd	4	640	50.1	640	50.1	**640**	**50.1**	4	633	50.7	**633**	**50.7**	633	50.7
447.dealII	4	**519**	**88.2**	515	88.8	528	86.7	4	**519**	**88.2**	515	88.8	528	86.7
450.soplex	4	586	56.9	587	56.9	**586**	**56.9**	4	568	58.7	**568**	**58.7**	568	58.8
453.povray	4	272	78.3	**273**	**78.0**	274	77.5	4	217	97.9	**218**	**97.5**	219	97.3
454.calculix	4	**399**	**82.6**	398	82.8	401	82.4	4	**399**	**82.6**	398	82.8	401	82.4
459.GemsFDTD	4	**854**	**49.7**	869	48.8	851	49.9	4	**854**	**49.7**	869	48.8	851	49.9
465.tonto	4	**539**	**73.0**	539	73.0	539	73.0	4	531	74.2	**530**	**74.2**	529	74.3
470.lbm	4	643	85.5	**642**	**85.5**	642	85.6	4	480	115	480	115	**480**	**115**
481.wrf	4	510	87.5	**510**	**87.7**	508	88.0	4	510	87.5	**510**	**87.7**	508	88.0
482.sphinx3	4	1086	71.8	1083	72.0	**1085**	**71.9**	4	1063	73.3	**1060**	**73.6**	1058	73.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
```

Platform Notes

```
BIOS configuration:
Data Reuse Optimization = Disable
```

General Notes

```
For information about Fujitsu please visit: http://www.fujitsu.com
Binaries were compiled on SLES 10 SP1 with Binutils 2.18.50.0.7.20080502
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -ansi-alias
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -ansi-alias
```

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -ansi-alias`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -ansi-alias -opt-prefetch -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110222.00.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110222.00.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 17:08:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 February 2011.