SPEC® CFP2006 Result

Fujitsu

PRIMERGY RX300 S6, Intel Xeon X5687, 3.60 GHz

SPECfp®_rate2006 = 122

SPECfp_rate_base2006 = 119

CPU2006 license:	19	**Test date:**	Dec-2010
Test sponsor:	Fujitsu	**Hardware Availability:**	Feb-2011
Tested by:	Fujitsu	**Software Availability:**	Nov-2010

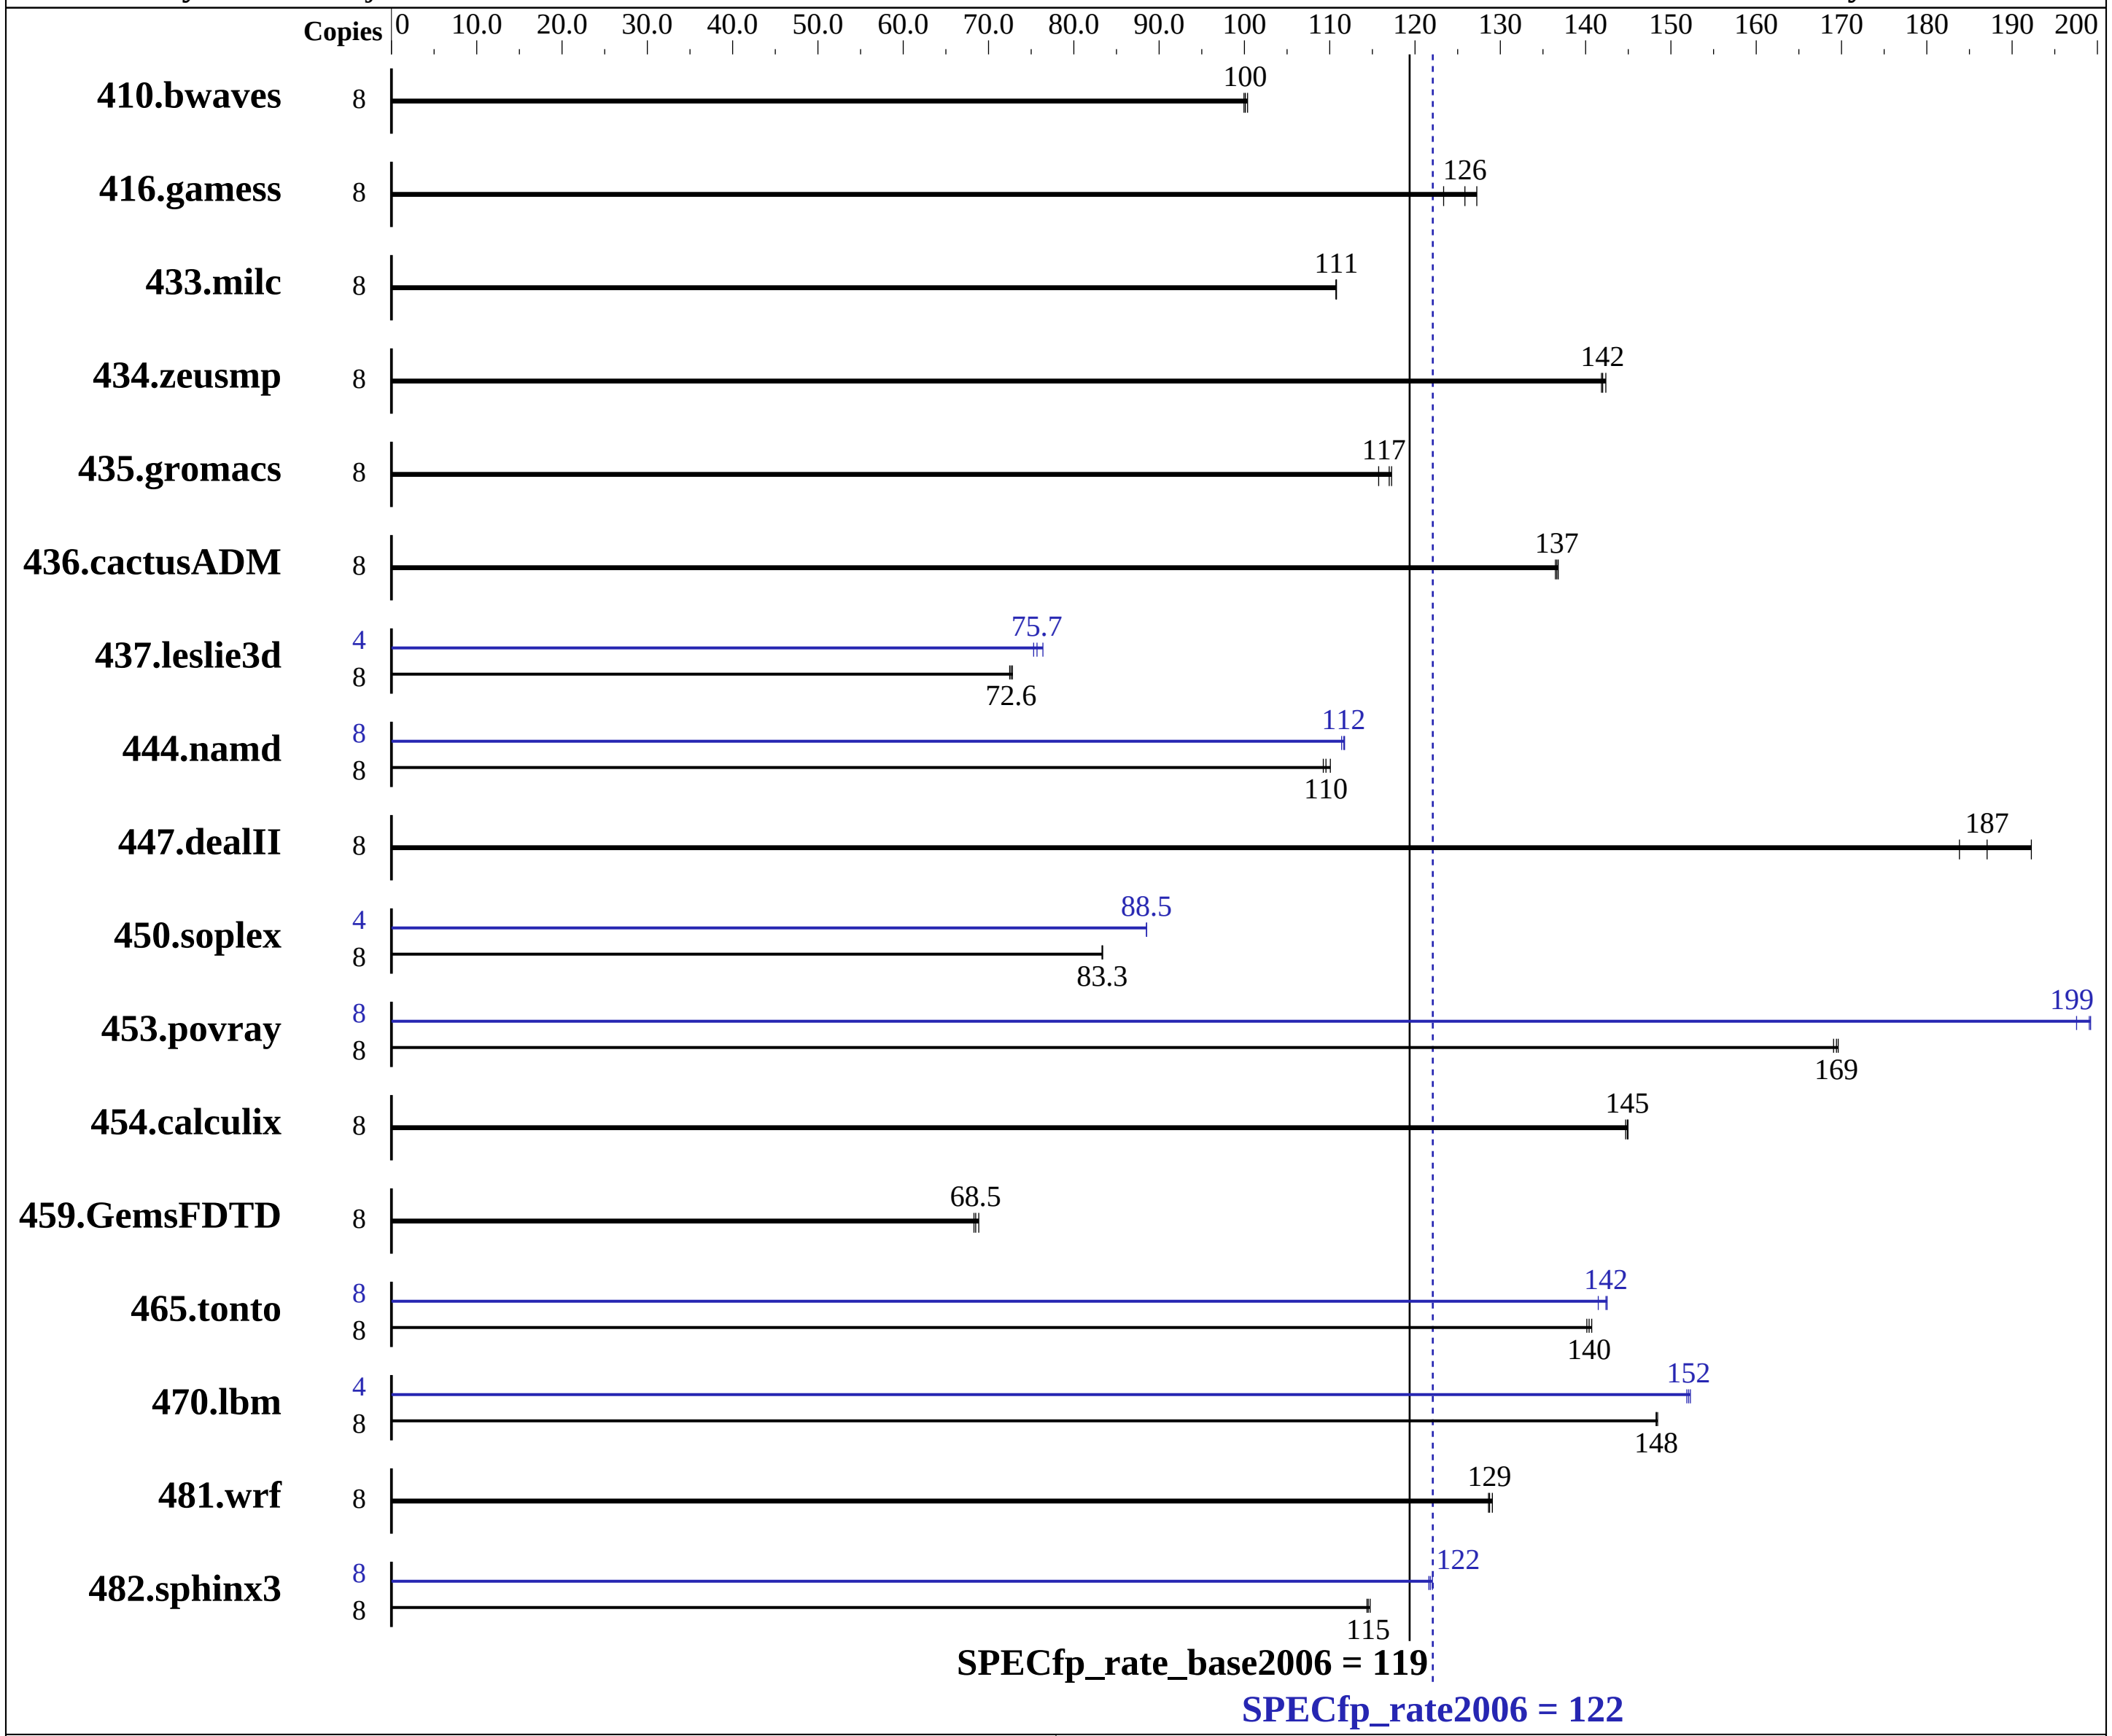

Hardware

CPU Name:	Intel Xeon X5687
CPU Characteristics:	Intel Turbo Boost Technology up to 3.87 GHz
CPU MHz:	3600
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) with SP1, Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.0.082 Build 20101006
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Fujitsu

PRIMERGY RX300 S6, Intel Xeon X5687, 3.60 GHz

SPECfp_rate2006 = 122

SPECfp_rate_base2006 = 119

CPU2006 license:	19	**Test date:**	Dec-2010
Test sponsor:	Fujitsu	**Hardware Availability:**	Feb-2011
Tested by:	Fujitsu	**Software Availability:**	Nov-2010

L3 Cache:	12 MB I+D on chip per chip	Peak Pointers:	32/64-bit
Other Cache:	None	Other Software:	none
Memory:	24 GB (6 x 4 GB 2Rx4 PC3-10600R-9, ECC)		
Disk Subsystem:	1 x SAS, 300 GB, 10000 RPM		
Other Hardware:	--		

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1083	100	**1086**	**100**	1088	99.9	8	1083	100	**1086**	**100**	1088	99.9
416.gamess	8	**1245**	**126**	1231	127	1270	123	8	**1245**	**126**	1231	127	1270	123
433.milc	8	**663**	**111**	663	111	663	111	8	**663**	**111**	663	111	663	111
434.zeusmp	8	513	142	**513**	**142**	511	142	8	513	142	**513**	**142**	511	142
435.gromacs	8	494	116	487	117	**488**	**117**	8	494	116	487	117	**488**	**117**
436.cactusADM	8	701	136	**700**	**137**	699	137	8	701	136	**700**	**137**	699	137
437.leslie3d	8	**1035**	**72.6**	1038	72.5	1033	72.8	4	499	75.3	492	76.4	**497**	**75.7**
444.namd	8	**586**	**110**	587	109	583	110	8	576	111	**575**	**112**	574	112
447.dealII	8	498	184	476	192	**489**	**187**	8	498	184	476	192	**489**	**187**
450.soplex	8	800	83.4	**801**	**83.3**	801	83.3	4	377	88.5	377	88.5	**377**	**88.5**
453.povray	8	251	170	**251**	**169**	252	169	8	**214**	**199**	215	198	214	199
454.calculix	8	456	145	455	145	**456**	**145**	8	456	145	455	145	**456**	**145**
459.GemsFDTD	8	**1239**	**68.5**	1233	68.9	1243	68.3	8	**1239**	**68.5**	1233	68.9	1243	68.3
465.tonto	8	559	141	**561**	**140**	562	140	8	556	141	**553**	**142**	552	143
470.lbm	8	740	148	741	148	**741**	**148**	4	361	152	362	152	**361**	**152**
481.wrf	8	692	129	695	129	**694**	**129**	8	692	129	695	129	**694**	**129**
482.sphinx3	8	1363	114	1359	115	**1362**	**115**	8	1278	122	1282	122	**1280**	**122**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
Large pages were not enabled for this run
```

Platform Notes

```
BIOS configuration:
Data Reuse Optimization = Disable
```

General Notes

```
This result was measured on the PRIMERGY RX300 S6. The PRIMERGY TX300 S6
and the PRIMERGY RX300 S6 are electronically equivalent.

For information about Fujitsu please visit: http://www.fujitsu.com
Binaries were compiled on SLES 10 SP1 with Binutils 2.18.50.0.7.20080502
```

Base Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -ansi-alias`

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -ansi-alias`

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -ansi-alias`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-malloc-options=3` `-ansi-alias` `-opt-prefetch` `-auto-ilp32`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2`

C++ benchmarks:

444.namd: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-fno-alias` `-auto-ilp32`

447.dealII: `basepeak = yes`

450.soplex: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-malloc-options=3`

453.povray: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll4` `-ansi-alias`

Fortran benchmarks:

410.bwaves: `basepeak = yes`

416.gamess: `basepeak = yes`

434.zeusmp: `basepeak = yes`

437.leslie3d: `-xSSE4.2 -ipo -O3 -no-prec-div -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT`

459.GemsFDTD: `basepeak = yes`

465.tonto: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll4` `-auto` `-inline-calloc` `-opt-malloc-options=3`

Benchmarks using both Fortran and C:

435.gromacs: `basepeak = yes`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110222.00.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110222.00.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 17:02:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 February 2011.