



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint®_rate2006 = 367

Huawei XH620, Intel Xeon X5670

SPECint_rate_base2006 = 346

CPU2006 license: 3175


Test date: Jan-2011

Test sponsor: Huawei

Hardware Availability: Apr-2010

Tested by: Huawei

Software Availability: Jan-2011

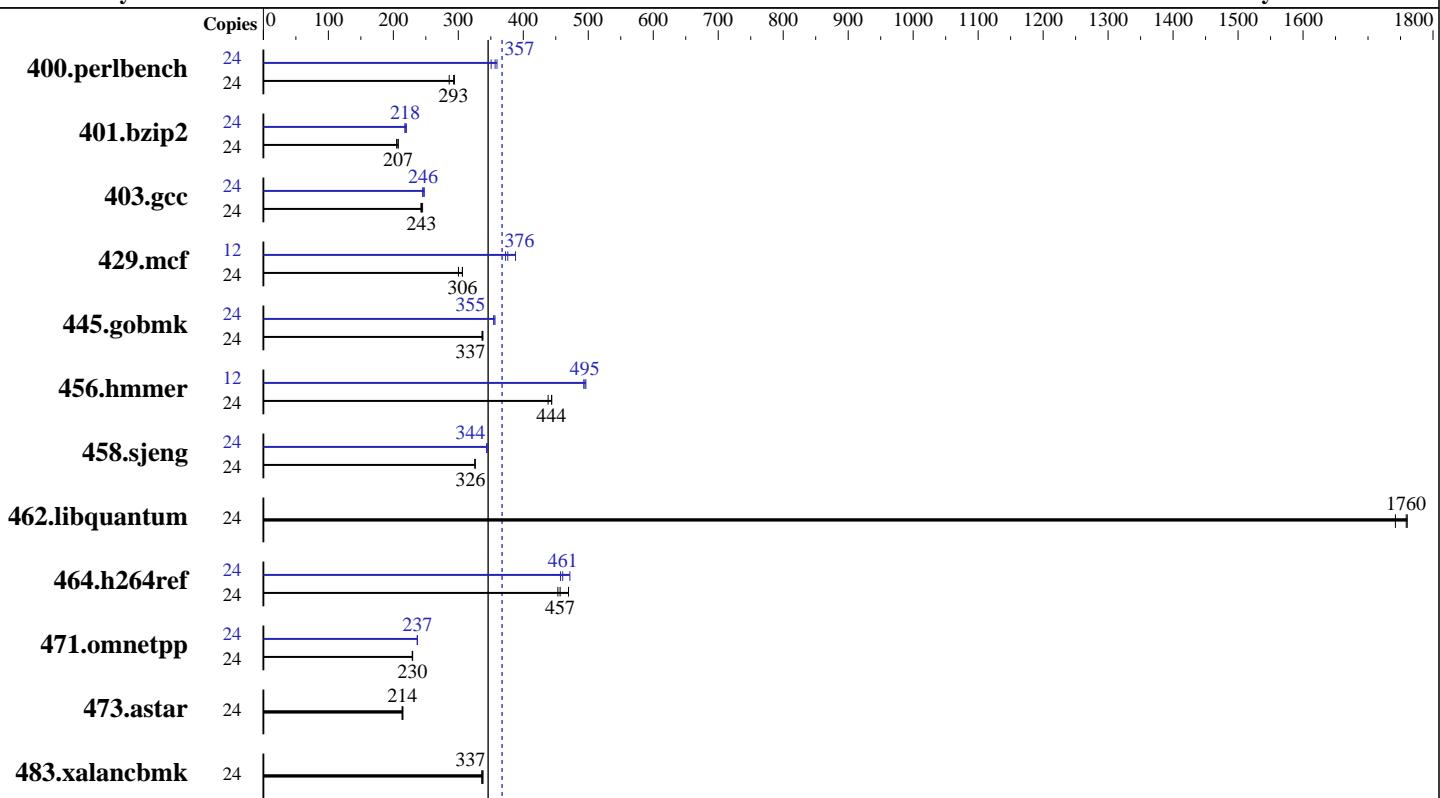

SPECint_rate_base2006 = 346

SPECint_rate2006 = 367

Hardware

CPU Name: Intel Xeon X5670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 300 GB SAS, 15K RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 367

Huawei XH620, Intel Xeon X5670

SPECint_rate_base2006 = 346

CPU2006 license: 3175

Test date: Jan-2011

Test sponsor: Huawei

Hardware Availability: Apr-2010

Tested by: Huawei

Software Availability: Jan-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	820	286	<u>801</u>	<u>293</u>	798	294	24	<u>657</u>	<u>357</u>	669	351	652	360
401.bzip2	24	1130	205	1117	207	<u>1118</u>	<u>207</u>	24	1064	218	<u>1061</u>	<u>218</u>	1052	220
403.gcc	24	789	245	<u>794</u>	<u>243</u>	797	242	24	788	245	<u>785</u>	<u>246</u>	780	248
429.mcf	24	729	300	714	306	<u>715</u>	<u>306</u>	12	294	373	<u>291</u>	<u>376</u>	282	388
445.gobmk	24	745	338	<u>747</u>	<u>337</u>	748	337	24	710	355	<u>710</u>	<u>355</u>	706	356
456.hammer	24	505	444	511	438	<u>505</u>	<u>444</u>	12	227	493	226	496	<u>226</u>	<u>495</u>
458.sjeng	24	<u>892</u>	<u>326</u>	891	326	892	326	24	<u>845</u>	<u>344</u>	845	344	843	344
462.libquantum	24	282	1760	285	1740	<u>283</u>	<u>1760</u>	24	282	1760	285	1740	<u>283</u>	<u>1760</u>
464.h264ref	24	1131	470	<u>1163</u>	<u>457</u>	1172	453	24	1126	472	<u>1153</u>	<u>461</u>	1162	457
471.omnetpp	24	655	229	653	230	<u>653</u>	<u>230</u>	24	<u>633</u>	<u>237</u>	633	237	633	237
473.astar	24	<u>787</u>	<u>214</u>	784	215	789	213	24	<u>787</u>	<u>214</u>	784	215	789	213
483.xalancbmk	24	493	336	490	338	<u>491</u>	<u>337</u>	24	493	336	490	338	<u>491</u>	<u>337</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Hugepages were not configured on the system.

Platform Notes

Data Reuse Optimization disabled in BIOS Setup.

General Notes

Binaries compiled on RHEL 5.5

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei XH620, Intel Xeon X5670

SPECint_rate2006 = 367

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2011

Hardware Availability: Apr-2010

Software Availability: Jan-2011

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbf/ -Wl,-hugetlbf-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smarterheap -lsmarterheap
-B /usr/share/libhugetlbf/ -Wl,-hugetlbf-link=BDT

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 367

Huawei XH620, Intel Xeon X5670

SPECint_rate_base2006 = 346

CPU2006 license: 3175

Test date: Jan-2011

Test sponsor: Huawei

Hardware Availability: Apr-2010

Tested by: Huawei

Software Availability: Jan-2011

Peak Portability Flags (Continued)

```
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -opt-prefetch -auto-ilp32 -ansi-alias
            -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
          -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
            -ansi-alias -auto-ilp32

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
            -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -unroll4 -auto-ilp32
            -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
               -L/smartheap -lsmartheap
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 367

Huawei XH620, Intel Xeon X5670

SPECint_rate_base2006 = 346

CPU2006 license: 3175

Test date: Jan-2011

Test sponsor: Huawei

Hardware Availability: Apr-2010

Tested by: Huawei

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110222.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110222.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 16:26:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 March 2011.