SPEC® CINT2006 Result

Fujitsu

PRIMERGY RX300 S6, Intel Xeon E5645, 2.40 GHz

SPECint®_rate2006 = 163

SPECint_rate_base2006 = 154

CPU2006 license:	19	**Test date:**	Jan-2011
Test sponsor:	Fujitsu	**Hardware Availability:**	Feb-2011
Tested by:	Fujitsu	**Software Availability:**	Nov-2010

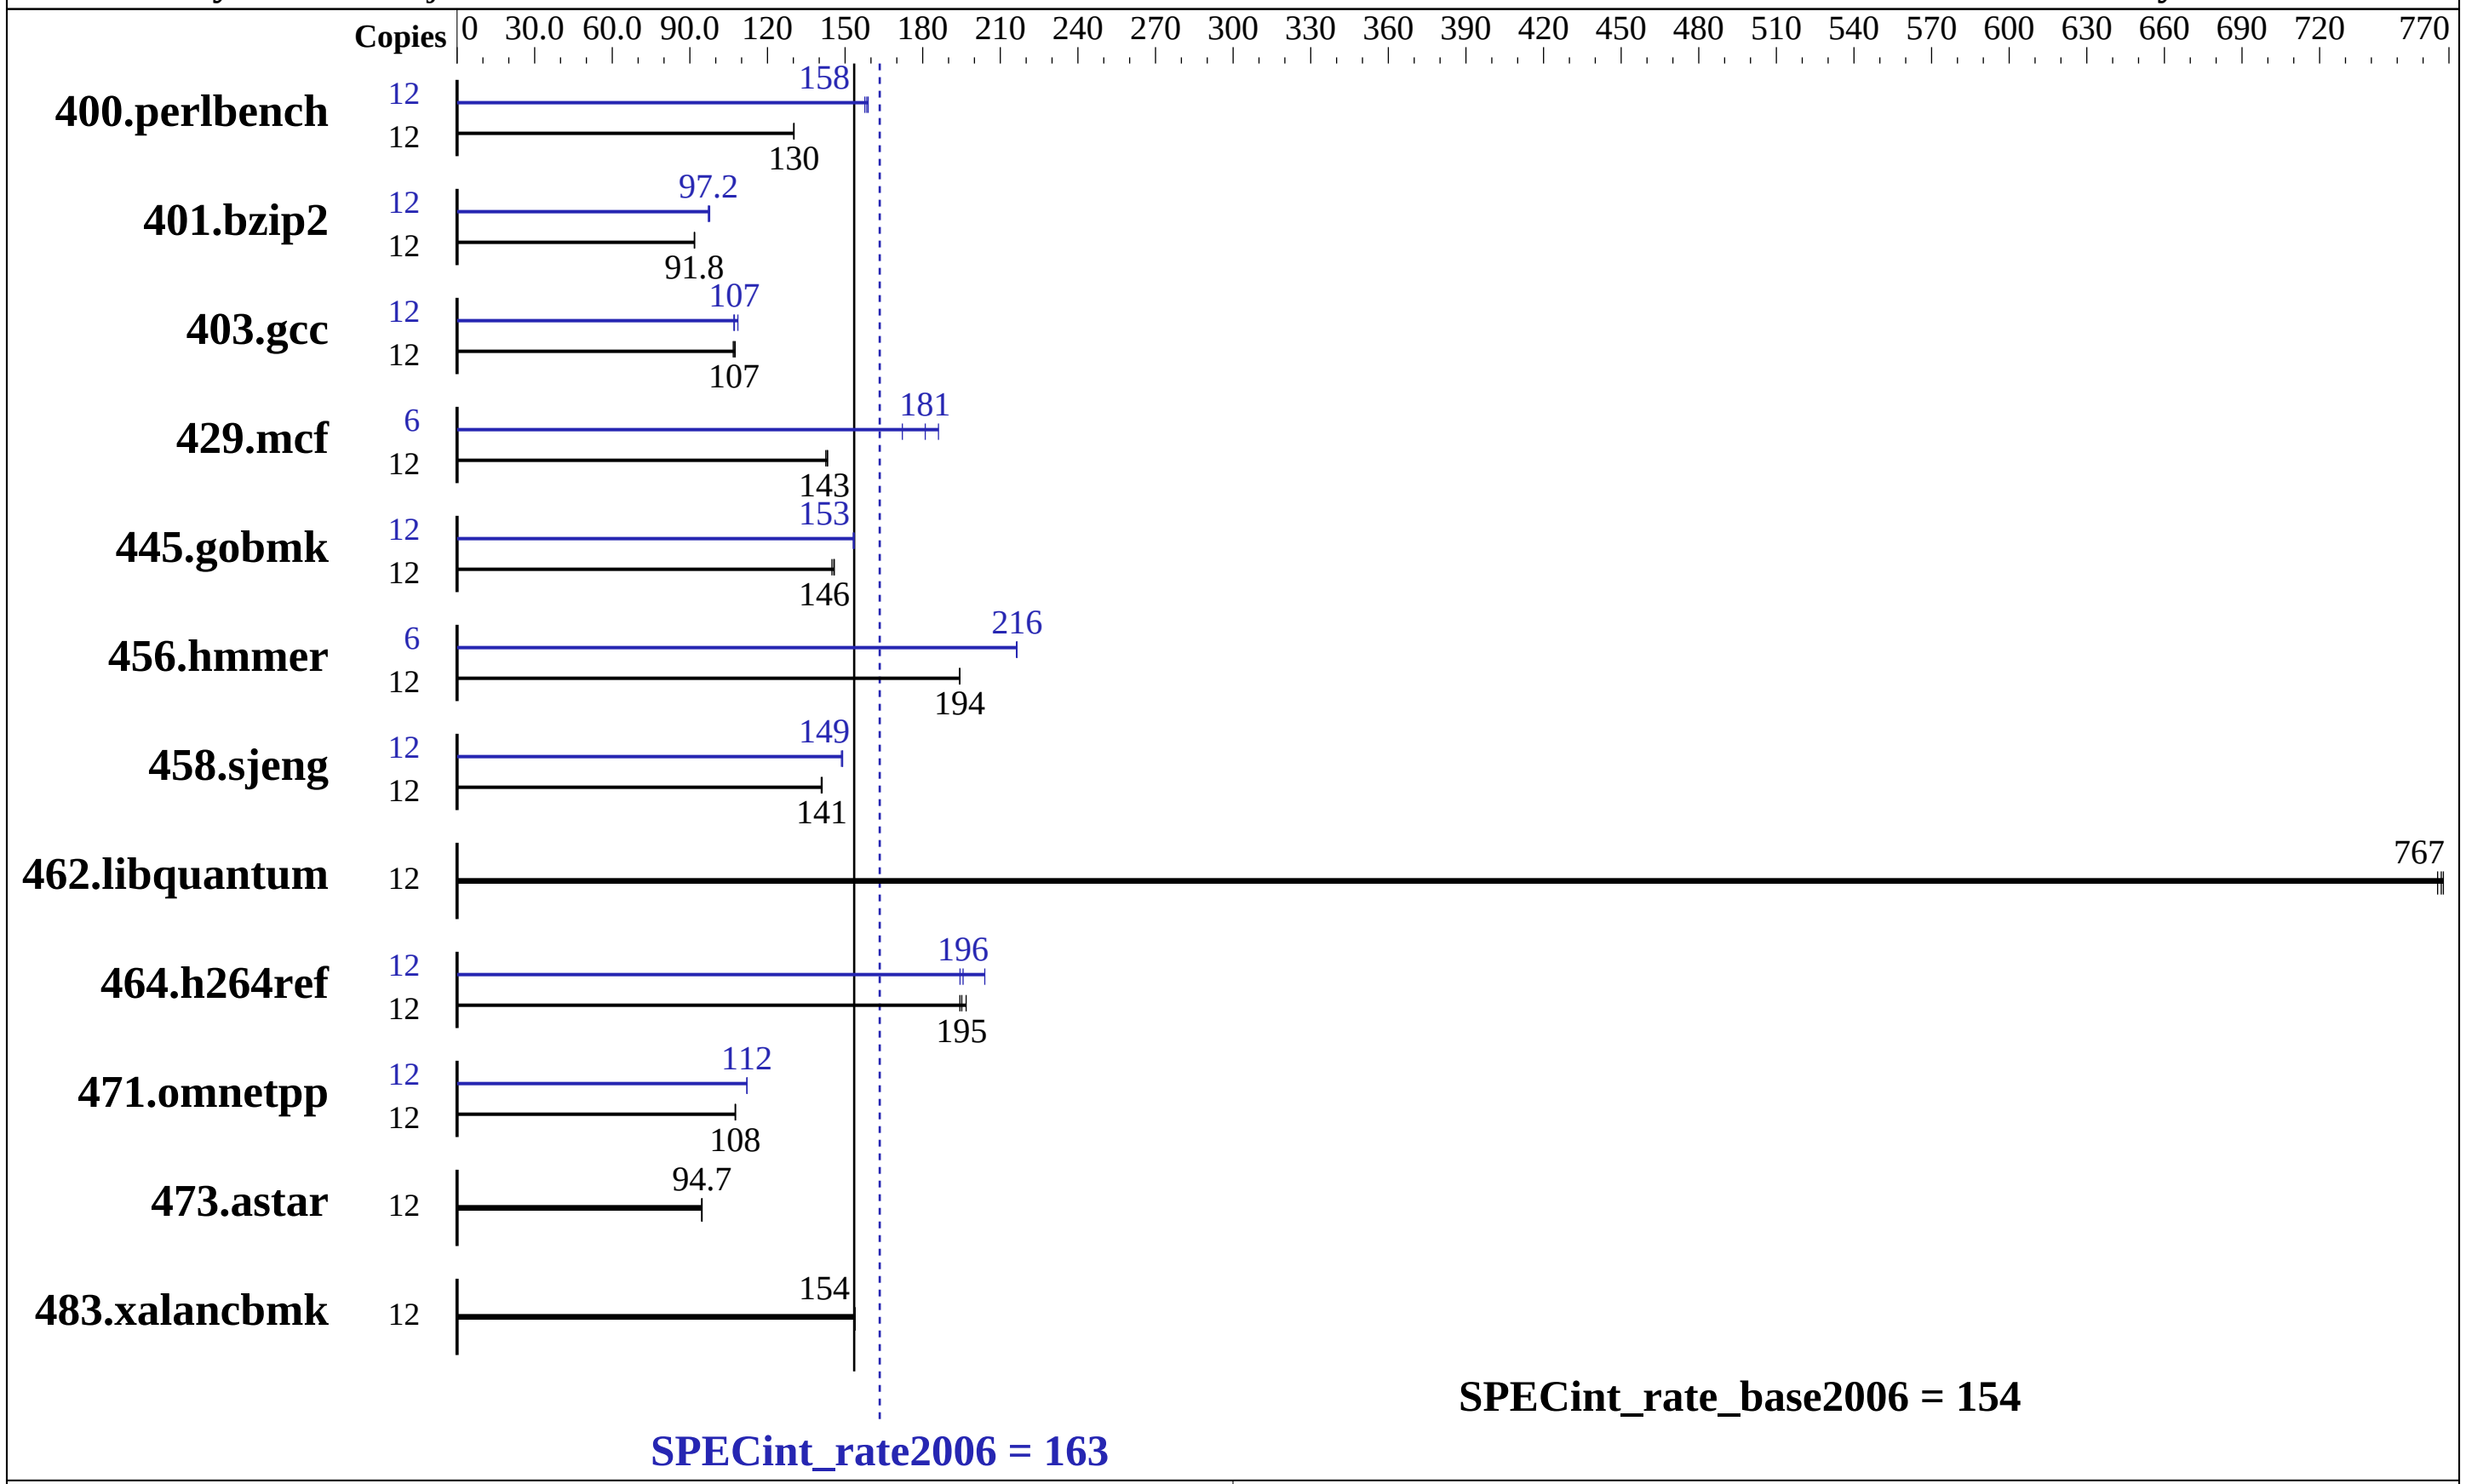

Hardware

CPU Name:	Intel Xeon E5645
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	6 cores, 1 chip, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (6 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	1 x SAS, 300 GB, 10000 RPM
Other Hardware:	--

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) with SP1, Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ Compiler XE for applications running on IA-32 Version 12.0.0.082 Build 20101006
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Fujitsu

PRIMERGY RX300 S6, Intel Xeon E5645, 2.40 GHz

SPECint_rate2006 = 163

SPECint_rate_base2006 = 154

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu
Test date: Jan-2011
Hardware Availability: Feb-2011
Software Availability: Nov-2010

Results Table

	Base							Peak						
Benchmark	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
400.perlbench	12	**900**	**130**	900	130	901	130	12	**740**	**158**	738	159	744	158
401.bzip2	12	**1262**	**91.8**	1262	91.8	1262	91.7	12	1191	97.2	**1191**	**97.2**	1186	97.6
403.gcc	12	898	108	**902**	**107**	905	107	12	903	107	890	109	**901**	**107**
429.mcf	12	768	143	**765**	**143**	764	143	6	**302**	**181**	318	172	294	186
445.gobmk	12	863	146	**864**	**146**	869	145	12	820	153	**821**	**153**	822	153
456.hmmer	12	576	194	577	194	**576**	**194**	6	**259**	**216**	259	216	259	216
458.sjeng	12	**1030**	**141**	1029	141	1031	141	12	977	149	974	149	**974**	**149**
462.libquantum	12	324	768	**324**	**767**	325	766	12	324	768	**324**	**767**	325	766
464.h264ref	12	1366	194	1349	197	**1361**	**195**	12	1366	194	1302	204	**1358**	**196**
471.omnetpp	12	**697**	**108**	698	108	697	108	12	669	112	669	112	**669**	**112**
473.astar	12	891	94.6	890	94.7	**890**	**94.7**	12	891	94.6	890	94.7	**890**	**94.7**
483.xalancbmk	12	539	154	538	154	**538**	**154**	12	539	154	538	154	**538**	**154**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
 'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 Hugepages were not configured on the system
```

Platform Notes

```
 BIOS configuration:
 Data Reuse Optimization = Disable
```

General Notes

```
 This result was measured on the PRIMERGY RX300 S6. The PRIMERGY RX300 S6
 and the PRIMERGY TX300 S6 are electronically equivalent.

 For information about Fujitsu please visit: http://www.fujitsu.com
 Binaries were compiled on SLES 10 SP1 with Binutils 2.18.50.0.7.20080502
```

Base Compiler Invocation

C benchmarks:
`icc -m32`

C++ benchmarks:
`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

Continued on next page

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

Continued on next page

Fujitsu

PRIMERGY RX300 S6, Intel Xeon E5645, 2.40 GHz

SPECint_rate2006 = 163

SPECint_rate_base2006 = 154

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jan-2011
Hardware Availability: Feb-2011
Software Availability: Nov-2010

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/smartheap -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110222.00.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110222.00.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 15:27:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 March 2011.