SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Blade X6270 M2 Server Module (Intel Xeon X5690 3.47 GHz)

SPECint®_rate2006 = 410

SPECint_rate_base2006 = 386

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Jan-2011
Hardware Availability: Mar-2011
Software Availability: Nov-2010

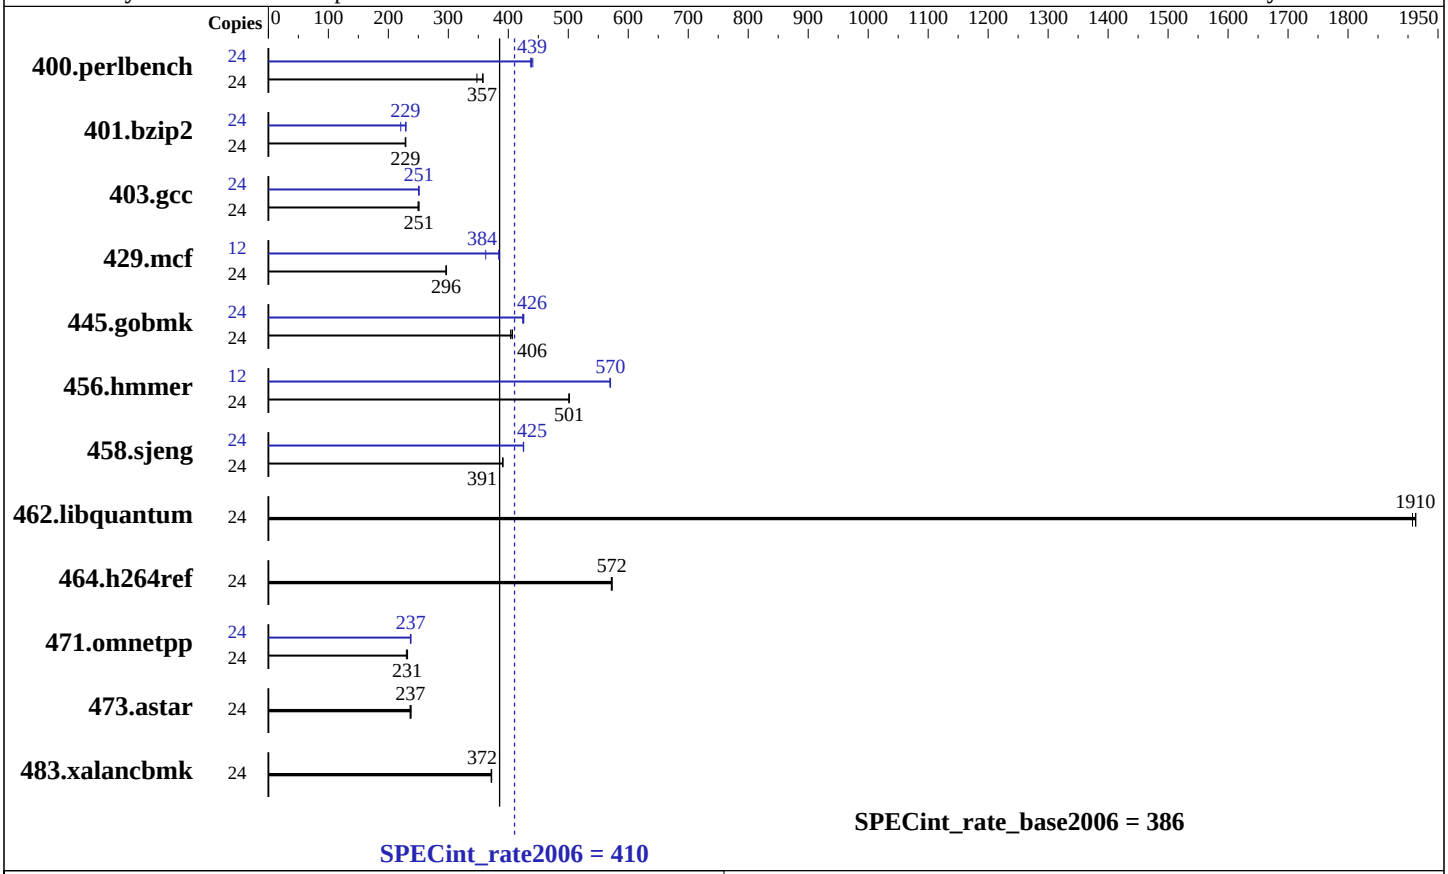

Hardware

CPU Name:	Intel Xeon X5690
CPU Characteristics:	Intel Turbo Boost Technology up to 3.73 GHz
CPU MHz:	3467
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	1 x 300 GB 10000 RPM SAS2
Other Hardware:	None

Software

Operating System:	Oracle Linux 5.5 kernel 2.6.18-194.el5
Compiler:	Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Blade X6270 M2 Server Module (Intel Xeon X5690 3.47 GHz)

SPECint_rate2006 = 410

SPECint_rate_base2006 = 386

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Jan-2011
Hardware Availability: Mar-2011
Software Availability: Nov-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	655	358	674	348	**657**	**357**	24	**535**	**439**	536	437	532	441
401.bzip2	24	1015	228	1011	229	**1012**	**229**	24	1050	221	1009	230	**1013**	**229**
403.gcc	24	774	249	**770**	**251**	770	251	24	769	251	772	250	**770**	**251**
429.mcf	24	739	296	**739**	**296**	737	297	12	302	362	**285**	**384**	284	385
445.gobmk	24	**620**	**406**	623	404	619	407	24	591	426	**592**	**426**	594	424
456.hmmer	24	446	502	**447**	**501**	447	501	12	196	571	197	569	**196**	**570**
458.sjeng	24	743	391	**743**	**391**	743	391	24	682	426	**683**	**425**	683	425
462.libquantum	24	261	1910	**260**	**1910**	260	1910	24	261	1910	**260**	**1910**	260	1910
464.h264ref	24	**928**	**572**	929	572	927	573	24	**928**	**572**	929	572	927	573
471.omnetpp	24	652	230	646	232	**649**	**231**	24	**632**	**237**	634	237	632	238
473.astar	24	708	238	713	236	**712**	**237**	24	708	238	713	236	**712**	**237**
483.xalancbmk	24	**445**	**372**	445	372	446	371	24	**445**	**372**	445	372	446	371

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 Hugepages was enabled with the following:
   'nodev   /mnt/hugepages   hugetlbfs  defaults   0 0' added to /etc/fstab
    echo 10800 > /proc/sys/vm/nr_hugepages
    export HUGETLB_MORECORE=yes
    export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

```
Load Default BIOS Settings and then change the following
  Data Reuse Optimization Disabled
  Hardware Prefetch Enabled
  Adjacent Cache Line Prefetch Enabled
  L1 Data Prefetch Enabled
```

General Notes

```
Binaries were compiled on RHEL5.5 with Binutils binutils-2.17.50.0.6-14.el5
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m32
```

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

Continued on next page

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

464.h264ref: `basepeak = yes`

C++ benchmarks:

471.omnetpp: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/smartheap -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.html`
`http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20101027.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.xml`
`http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20101027.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 16:15:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 March 2011.