SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265+ (Intel Xeon E5507, 2.26 GHz)

SPECint®2006 = 25.9

SPECint_base2006 = 24.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Feb-2011
Hardware Availability: May-2010
Software Availability: Nov-2010

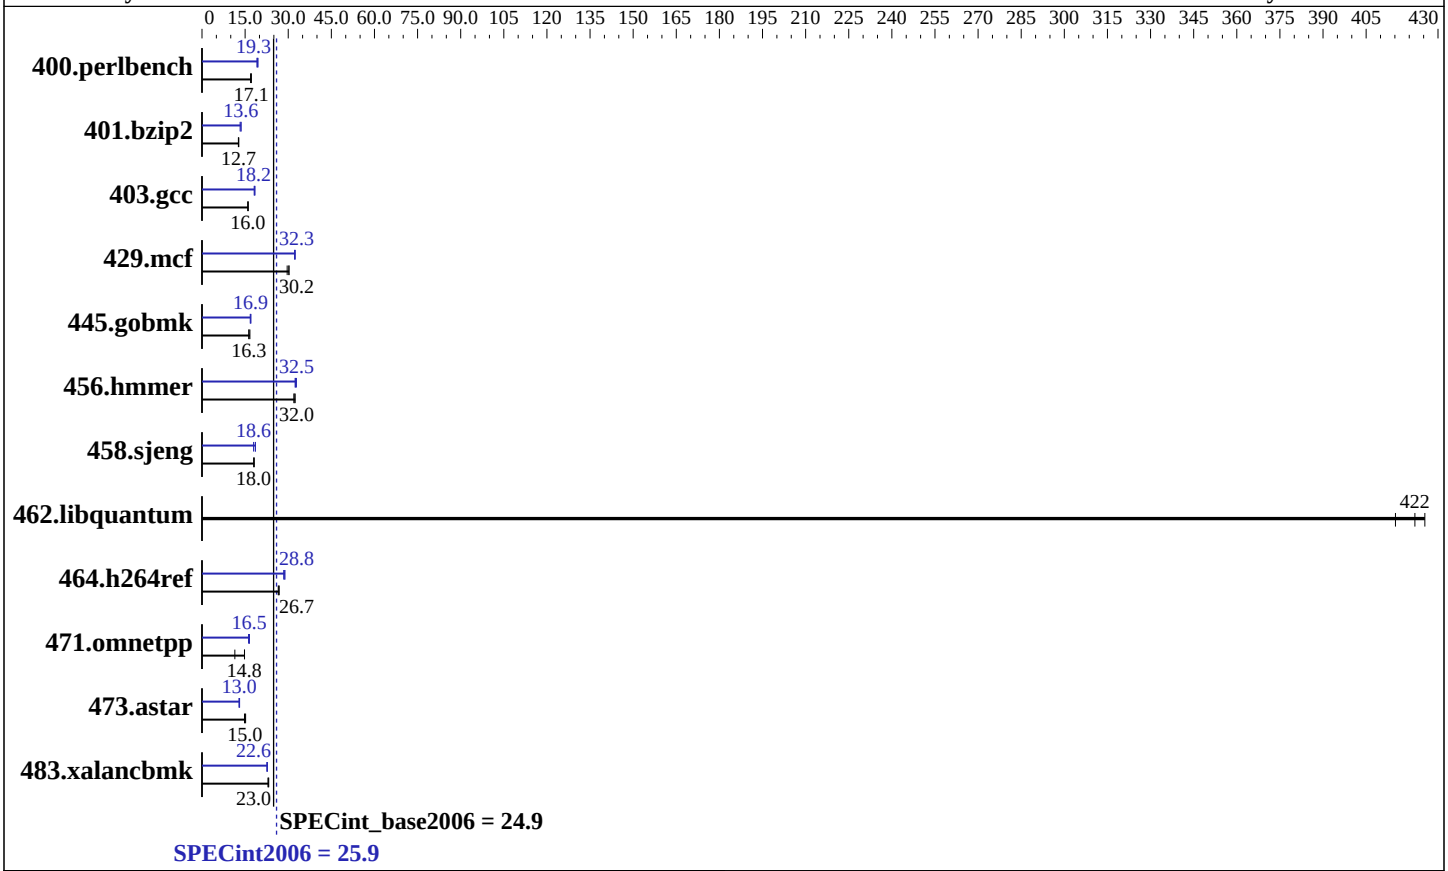

Hardware

CPU Name:	Intel Xeon E5507
CPU Characteristics:	
CPU MHz:	2267
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	4 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC, running at 1066 MHz)
Disk Subsystem:	2 x 50 GB SATA, SSD
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265+ (Intel Xeon E5507, 2.26 GHz)

SPECint2006 = 25.9

SPECint_base2006 = 24.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Feb-2011
Hardware Availability: May-2010
Software Availability: Nov-2010

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	578	16.9	570	17.1	**571**	**17.1**	501	19.5	**506**	**19.3**	512	19.1
401.bzip2	753	12.8	763	12.7	**760**	**12.7**	728	13.3	711	13.6	**711**	**13.6**
403.gcc	505	15.9	**502**	**16.0**	501	16.1	442	18.2	**442**	**18.2**	436	18.5
429.mcf	308	29.6	301	30.3	**302**	**30.2**	**282**	**32.3**	283	32.2	281	32.4
445.gobmk	629	16.7	**643**	**16.3**	643	16.3	625	16.8	**619**	**16.9**	617	17.0
456.hmmer	288	32.4	291	32.0	**291**	**32.0**	**287**	**32.5**	288	32.4	284	32.9
458.sjeng	667	18.1	671	18.0	**670**	**18.0**	652	18.6	675	17.9	**652**	**18.6**
462.libquantum	48.7	425	**49.1**	**422**	49.9	415	48.7	425	**49.1**	**422**	49.9	415
464.h264ref	834	26.5	**828**	**26.7**	825	26.8	779	28.4	767	28.8	**769**	**28.8**
471.omnetpp	547	11.4	422	14.8	**423**	**14.8**	**379**	**16.5**	379	16.5	386	16.2
473.astar	475	14.8	**469**	**15.0**	463	15.2	537	13.1	545	12.9	**541**	**13.0**
483.xalancbmk	**300**	**23.0**	300	23.0	297	23.2	**305**	**22.6**	305	22.6	303	22.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
Hugepages was enabled with the following:
  'nodev   /mnt/hugepages   hugetlbfs  defaults   0 0' added to /etc/fstab
   echo 900 > /proc/sys/vm/nr_hugepages
   export HUGETLB_MORECORE=yes
   export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

```
Power C-states enabled in BIOS
Demand Scrub disabled in BIOS
```

General Notes

```
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
```

Base Compiler Invocation

C benchmarks:

```
icc  -m64
```

C++ benchmarks:

```
icpc -m64
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap64
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

Continued on next page

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):
icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs -L/smartheap -lsmartheap -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/smartheap -lsmartheap64

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias -Wl,-z,muldefs -L/smartheap -lsmartheap -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265+ (Intel Xeon E5507, 2.26 GHz)

SPECint2006 = 25.9

SPECint_base2006 = 24.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Feb-2011
Hardware Availability: May-2010
Software Availability: Nov-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 16:49:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 March 2011.