



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

### SPECfp®\_rate2006 = 231

## Acer AR585 F1 (AMD Opteron 6128)

### SPECfp\_rate\_base2006 = 208

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Apr-2011

Hardware Availability: Jul-2010

Software Availability: Jul-2010

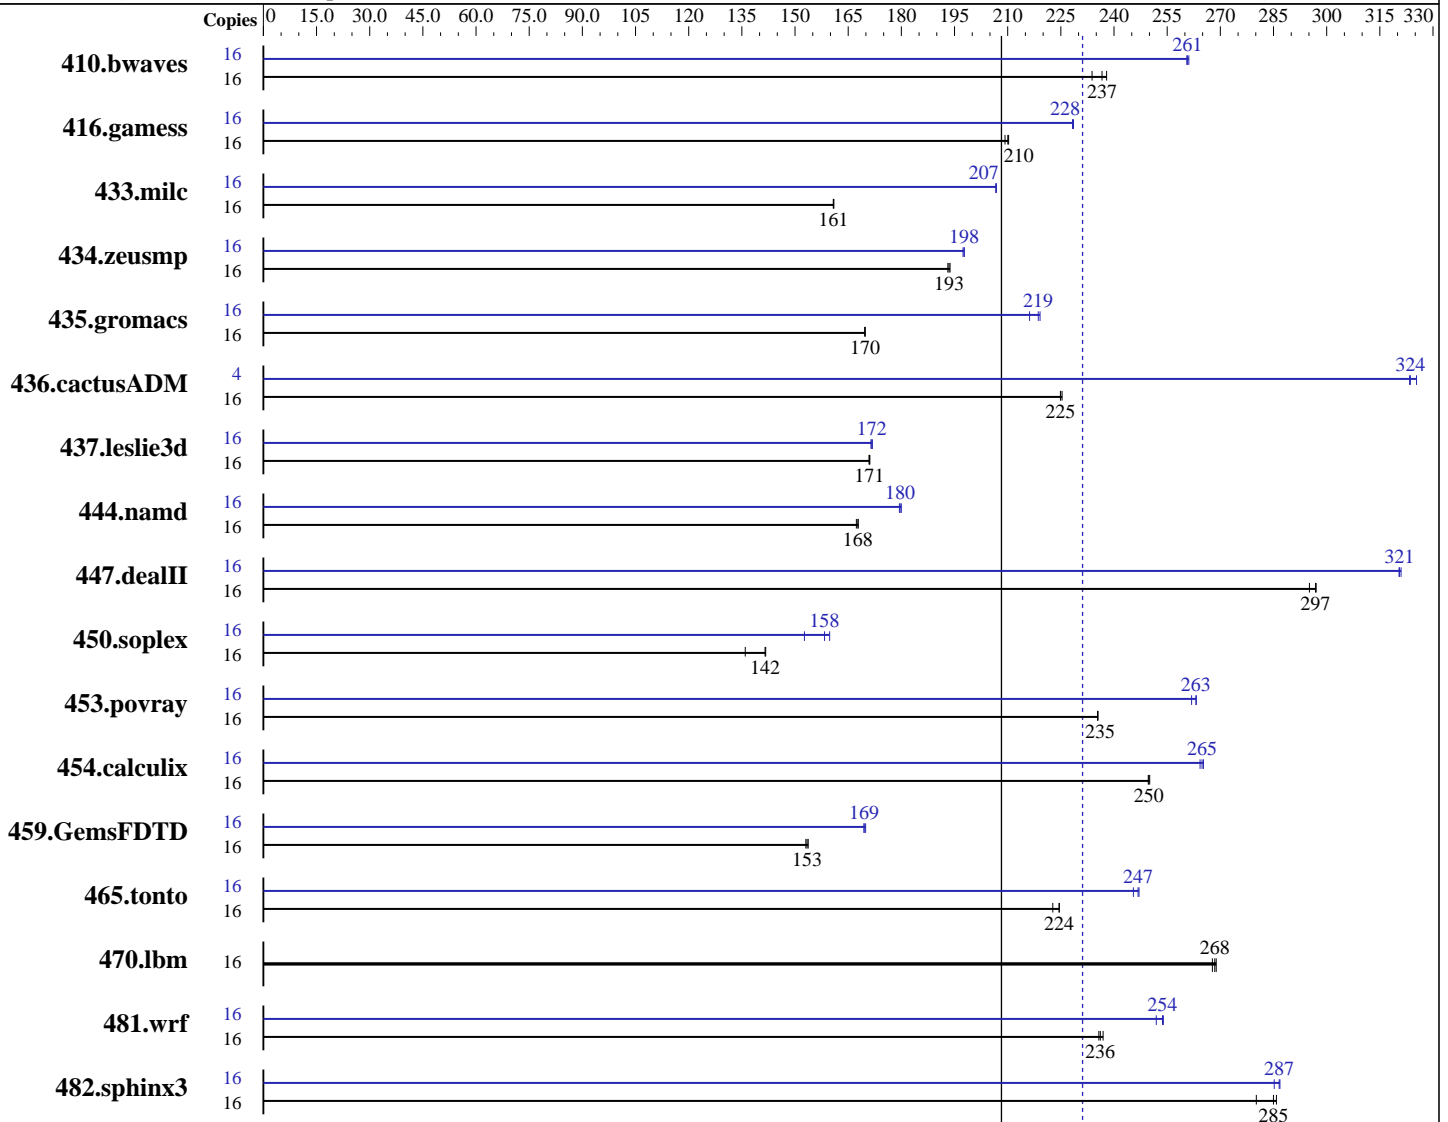

SPECfp\_rate\_base2006 = 208

SPECfp\_rate2006 = 231

### Hardware

CPU Name: AMD Opteron 6128  
 CPU Characteristics:  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 SPI  
 Kernel 2.6.32.12-0.7-default  
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multiuser)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 231

Acer AR585 F1 (AMD Opteron 6128)

SPECfp\_rate\_base2006 = 208

CPU2006 license: 97

Test date: Apr-2011

Test sponsor: Acer Incorporated

Hardware Availability: Jul-2010

Tested by: Acer Incorporated

Software Availability: Jul-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 4 cores  
Other Cache: None  
Memory: 64 GB (16 x 4 GB 2Rx8 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	930	234	914	238	<b>919</b>	<b>237</b>	16	833	261	835	261	<b>834</b>	<b>261</b>
416.gamess	16	1497	209	1490	210	<b>1492</b>	<b>210</b>	16	<b>1372</b>	<b>228</b>	1372	228	1371	229
433.milc	16	913	161	<b>913</b>	<b>161</b>	913	161	16	711	207	710	207	<b>710</b>	<b>207</b>
434.zeusmp	16	<b>753</b>	<b>193</b>	752	194	754	193	16	738	197	<b>736</b>	<b>198</b>	736	198
435.gromacs	16	673	170	<b>673</b>	<b>170</b>	673	170	16	528	216	521	219	<b>523</b>	<b>219</b>
436.cactusADM	16	850	225	<b>850</b>	<b>225</b>	848	225	4	147	325	148	323	<b>148</b>	<b>324</b>
437.leslie3d	16	<b>880</b>	<b>171</b>	880	171	879	171	16	<b>876</b>	<b>172</b>	877	171	875	172
444.namd	16	767	167	<b>765</b>	<b>168</b>	765	168	16	715	179	<b>714</b>	<b>180</b>	713	180
447.dealII	16	616	297	620	295	<b>617</b>	<b>297</b>	16	570	321	<b>571</b>	<b>321</b>	571	320
450.soplex	16	981	136	<b>943</b>	<b>142</b>	942	142	16	874	153	<b>843</b>	<b>158</b>	835	160
453.povray	16	<b>362</b>	<b>235</b>	362	235	361	235	16	323	263	325	262	<b>324</b>	<b>263</b>
454.calculix	16	<b>528</b>	<b>250</b>	528	250	529	250	16	<b>498</b>	<b>265</b>	498	265	499	264
459.GemsFDTD	16	1104	154	1109	153	<b>1107</b>	<b>153</b>	16	999	170	<b>1002</b>	<b>169</b>	1002	169
465.tonto	16	<b>701</b>	<b>224</b>	707	223	701	225	16	637	247	<b>638</b>	<b>247</b>	641	245
470.lbm	16	<b>819</b>	<b>268</b>	821	268	818	269	16	<b>819</b>	<b>268</b>	821	268	818	269
481.wrf	16	758	236	754	237	<b>757</b>	<b>236</b>	16	<b>705</b>	<b>254</b>	704	254	709	252
482.sphinx3	16	1113	280	1091	286	<b>1094</b>	<b>285</b>	16	1093	285	1087	287	<b>1088</b>	<b>287</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=14336 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 231**

**Acer AR585 F1 (AMD Opteron 6128)**

**SPECfp\_rate\_base2006 = 208**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Apr-2011

**Hardware Availability:** Jul-2010

**Software Availability:** Jul-2010

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/usr/cpu2006/amd1002-rate-libs-revC/64:/usr/cpu2006/amd1002-rate-libs-revC/32"

OMP\_NUM\_THREADS = "4"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on SLES10 SP2 with binutils 2.18

This result was measured on the Gateway GR585 F1.

The Acer AR585 F1 and Gateway GR585 F1 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.lelie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
 -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 231**

**Acer AR585 F1 (AMD Opteron 6128)**

**SPECfp\_rate\_base2006 = 208**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Apr-2011

**Hardware Availability:** Jul-2010

**Software Availability:** Jul-2010

## Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -OPT:malloc\_alg=1 -HP:bdt=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -static -INLINE:aggressive=on  
-OPT:malloc\_alg=1 -HP:bdt=2m

Fortran benchmarks:

-march=barcelona -mso -Ofast -HP

Benchmarks using both Fortran and C:

-march=barcelona -mso -Ofast -OPT:malloc\_alg=1 -HP:bdt=2m -HP

## Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 231**

**Acer AR585 F1 (AMD Opteron 6128)**

**SPECfp\_rate\_base2006 = 208**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Apr-2011

**Hardware Availability:** Jul-2010

**Software Availability:** Jul-2010

## Peak Optimization Flags

### C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1  
-CG:local\_sched\_alg=1 -CG:locs\_shallow\_depth=1  
-HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=2  
-CG:sse\_cse\_regs=0 -CG:locs\_shallow\_depth=1 -CG:cmp\_peep=on  
-CG:local\_sched\_alg=1 -INLINE:aggressive=on

### C++ benchmarks:

444.namd: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:ignore\_feedback=off  
-CG:local\_sched\_alg=2 -CG:load\_exe=0 -CG:compute\_to=on  
-OPT:unroll\_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.deallI: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on  
-LNO:opt=0 -fno-emit-exceptions -m32  
-OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
-OPT:unroll\_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on  
-CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -OPT:malloc\_alg=1  
-CG:load\_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

### Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on  
-LNO:blocking=off -LNO:prefetch\_ahead=5  
-LNO:ignore\_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m  
-CG:cmp\_peep=on

416.gamess: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off  
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll\_size=256  
-CG:cmp\_peep=on -GRA:prioritize\_by\_density=on -HP

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 231

Acer AR585 F1 (AMD Opteron 6128)

SPECfp\_rate\_base2006 = 208

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Apr-2011

Hardware Availability: Jul-2010

Software Availability: Jul-2010

## Peak Optimization Flags (Continued)

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:local\_sched\_alg=1  
-HP

465.tonto: -march=barcelona -mso -Ofast  
-OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2  
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch\_ahead=1  
-HP:bdt=2m:heap=2m -LANG:heap\_allocation\_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load\_exe=0  
-CG:ptr\_load\_use=0 -CG:local\_sched\_alg=2 -CG:compute\_to=on  
-LNO:prefetch\_ahead=30 -WOPT:unroll=2  
-GRA:optimize\_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on -m3dnow  
-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 18:52:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 April 2011.