SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Gateway GR585 F1 (AMD Opteron 6164 HE)

SPECfp®_rate2006 = 529

SPECfp_rate_base2006 = 492

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Apr-2011
Hardware Availability: Jul-2010
Software Availability: Jul-2010

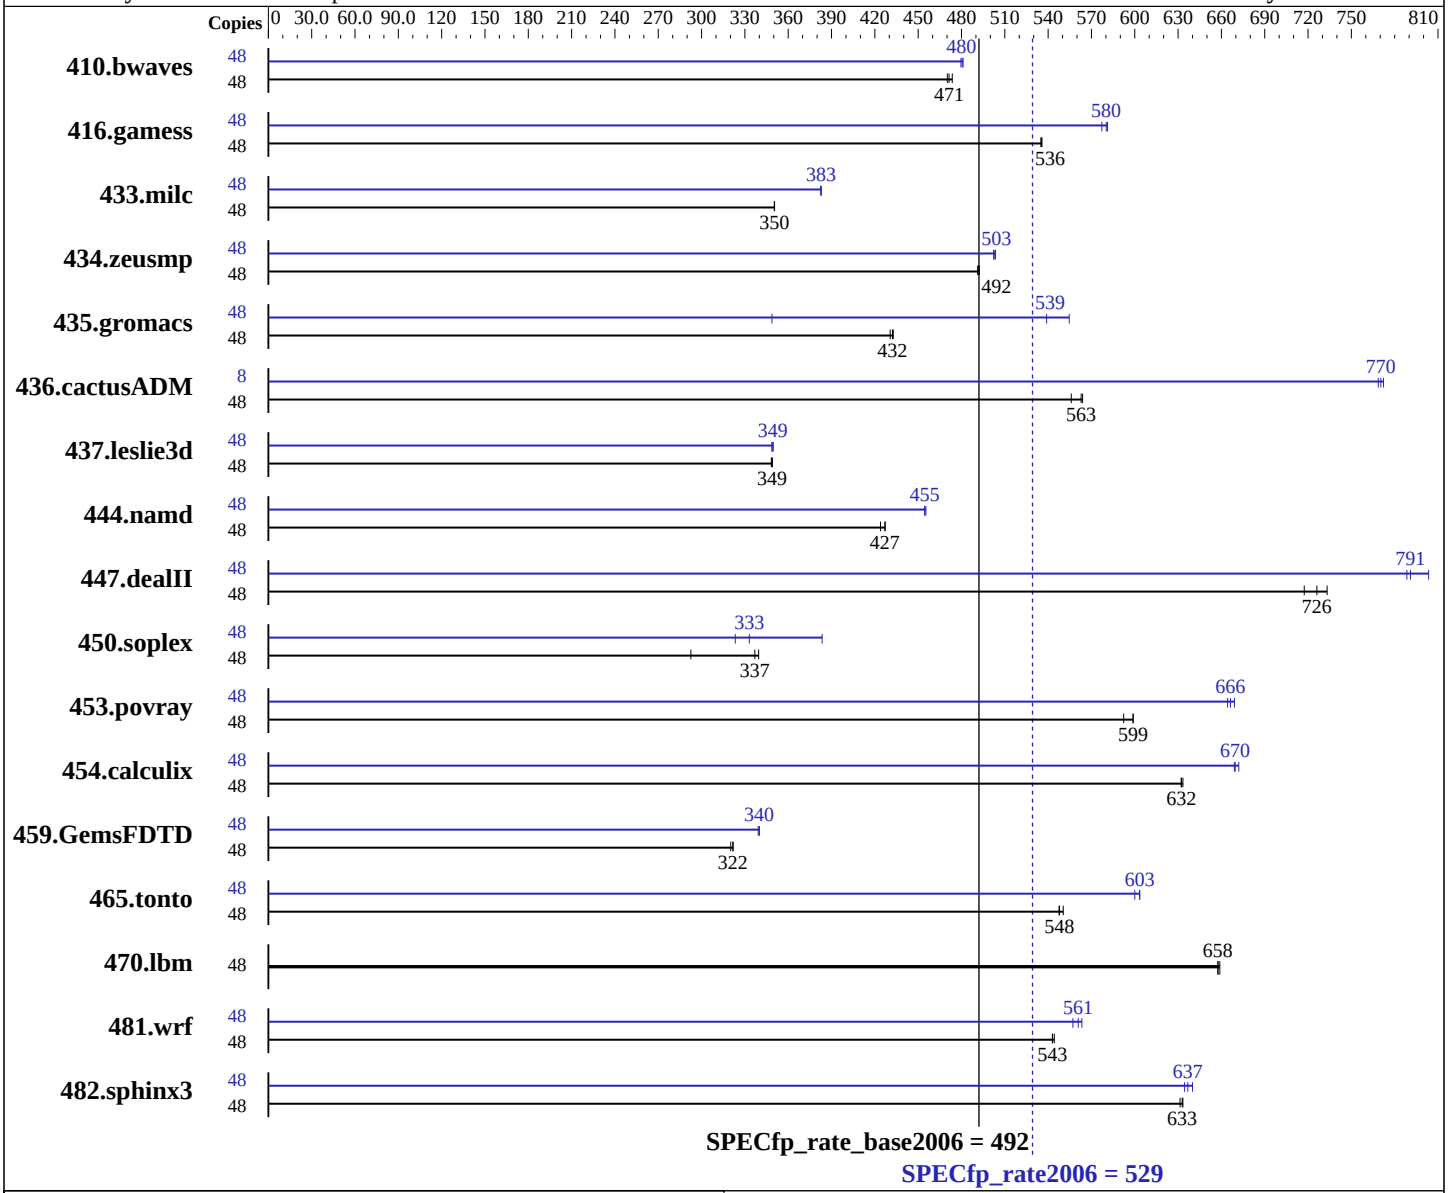

Hardware

CPU Name:	AMD Opteron 6164 HE
CPU Characteristics:	
CPU MHz:	1700
FPU:	Integrated
CPU(s) enabled:	48 cores, 4 chips, 12 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP1 Kernel 2.6.32.12-0.7-default
Compiler:	x86 Open64 4.2.4 Compiler Suite (from AMD)
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multiuser)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Gateway GR585 F1 (AMD Opteron 6164 HE)

SPECfp_rate2006 = 529

SPECfp_rate_base2006 = 492

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Apr-2011
Hardware Availability: Jul-2010
Software Availability: Jul-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
Other Cache: None
Memory: 128 GB (32 x 4 GB 2Rx8 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	**1384**	**471**	1387	470	1377	474	48	1360	480	**1358**	**480**	1356	481
416.gamess	48	**1755**	**536**	1757	535	1754	536	48	1617	581	1628	577	**1620**	**580**
433.milc	48	1258	350	**1257**	**350**	1257	351	48	1152	383	**1151**	**383**	1151	383
434.zeusmp	48	**888**	**492**	889	491	887	492	48	870	502	867	504	**869**	**503**
435.gromacs	48	796	431	**793**	**432**	792	433	48	983	349	**636**	**539**	618	555
436.cactusADM	48	1032	556	**1019**	**563**	1017	564	8	**124**	**770**	124	769	124	772
437.leslie3d	48	**1294**	**349**	1293	349	1295	348	48	1294	349	**1292**	**349**	1290	350
444.namd	48	908	424	**902**	**427**	901	427	48	847	454	845	455	**847**	**455**
447.dealII	48	749	733	765	717	**756**	**726**	48	696	788	**694**	**791**	683	803
450.soplex	48	1368	293	**1188**	**337**	1179	340	48	1238	323	**1202**	**333**	1044	383
453.povray	48	431	592	**426**	**599**	426	599	48	384	664	**383**	**666**	382	669
454.calculix	48	625	633	626	632	**626**	**632**	48	592	669	589	672	**591**	**670**
459.GemsFDTD	48	1590	320	**1583**	**322**	1582	322	48	1498	340	1501	339	**1498**	**340**
465.tonto	48	**862**	**548**	858	550	863	548	48	783	603	787	600	**783**	**603**
470.lbm	48	1001	659	**1003**	**658**	1003	658	48	1001	659	**1003**	**658**	1003	658
481.wrf	48	985	544	**987**	**543**	988	543	48	962	557	**956**	**561**	952	563
482.sphinx3	48	1482	631	1477	633	**1478**	**633**	48	1474	635	1462	640	**1469**	**637**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=21600 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/usr/cpu2006/amd1002-rate-libs-revC/64:/usr/cpu2006/amd1002-rate-libs-revC/32"
OMP_NUM_THREADS = "6"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
Binaries were compiled on SLES10 SP2 with binutils 2.18
This result was measured on the Gateway GR585 F1.
The Acer AR585 F1 and Gateway GR585 F1 are electronically equivalent.
```

Base Compiler Invocation

C benchmarks:
`opencc`

C++ benchmarks:
`openCC`

Fortran benchmarks:
`openf95`

Benchmarks using both Fortran and C:
`opencc openf95`

Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64`
436.cactusADM: `-DSPEC_CPU_LP64 -fno-second-underscore`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
450.soplex: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -fno-second-underscore`
482.sphinx3: `-DSPEC_CPU_LP64`

Base Optimization Flags

C benchmarks:
`-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m`

C++ benchmarks:
`-march=barcelona -mso -Ofast -static -INLINE:aggressive=on -OPT:malloc_alg=1 -HP:bdt=2m`

Fortran benchmarks:
`-march=barcelona -mso -Ofast -HP`

Benchmarks using both Fortran and C:
`-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m -HP`

Peak Compiler Invocation

C benchmarks:
`opencc`

C++ benchmarks:
`openCC`

Fortran benchmarks:
`openf95`

Benchmarks using both Fortran and C:
`opencc openf95`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64`
436.cactusADM: `-DSPEC_CPU_LP64 -fno-second-underscore`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -fno-second-underscore`
482.sphinx3: `-DSPEC_CPU_LP64`

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1
-CG:local_sched_alg=1 -CG:locs_shallow_depth=1
-HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
-CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
-OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:prefetch_ahead=5
-LNO:ignore_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m
-CG:cmp_peep=on

416.gamess: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll_size=256
-CG:cmp_peep=on -GRA:prioritize_by_density=on -HP

Continued on next page

Peak Optimization Flags (Continued)

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1
-HP

465.tonto: -march=barcelona -mso -Ofast
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch_ahead=1
-HP:bdt=2m:heap=2m -LANG:heap_allocation_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load_exe=0
-CG:ptr_load_use=0 -CG:local_sched_alg=2 -CG:compute_to=on
-LNO:prefetch_ahead=30 -WOPT:unroll=2
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on -m3dnow
-HP

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html
http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml
http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 20:45:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 May 2011.