SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH67BLB3 Motherboard (Intel Core i5-2400S)

SPECfp®_rate2006 = 91.8

SPECfp_rate_base2006 = 90.4

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2011
Hardware Availability: Mar-2011
Software Availability: Apr-2011

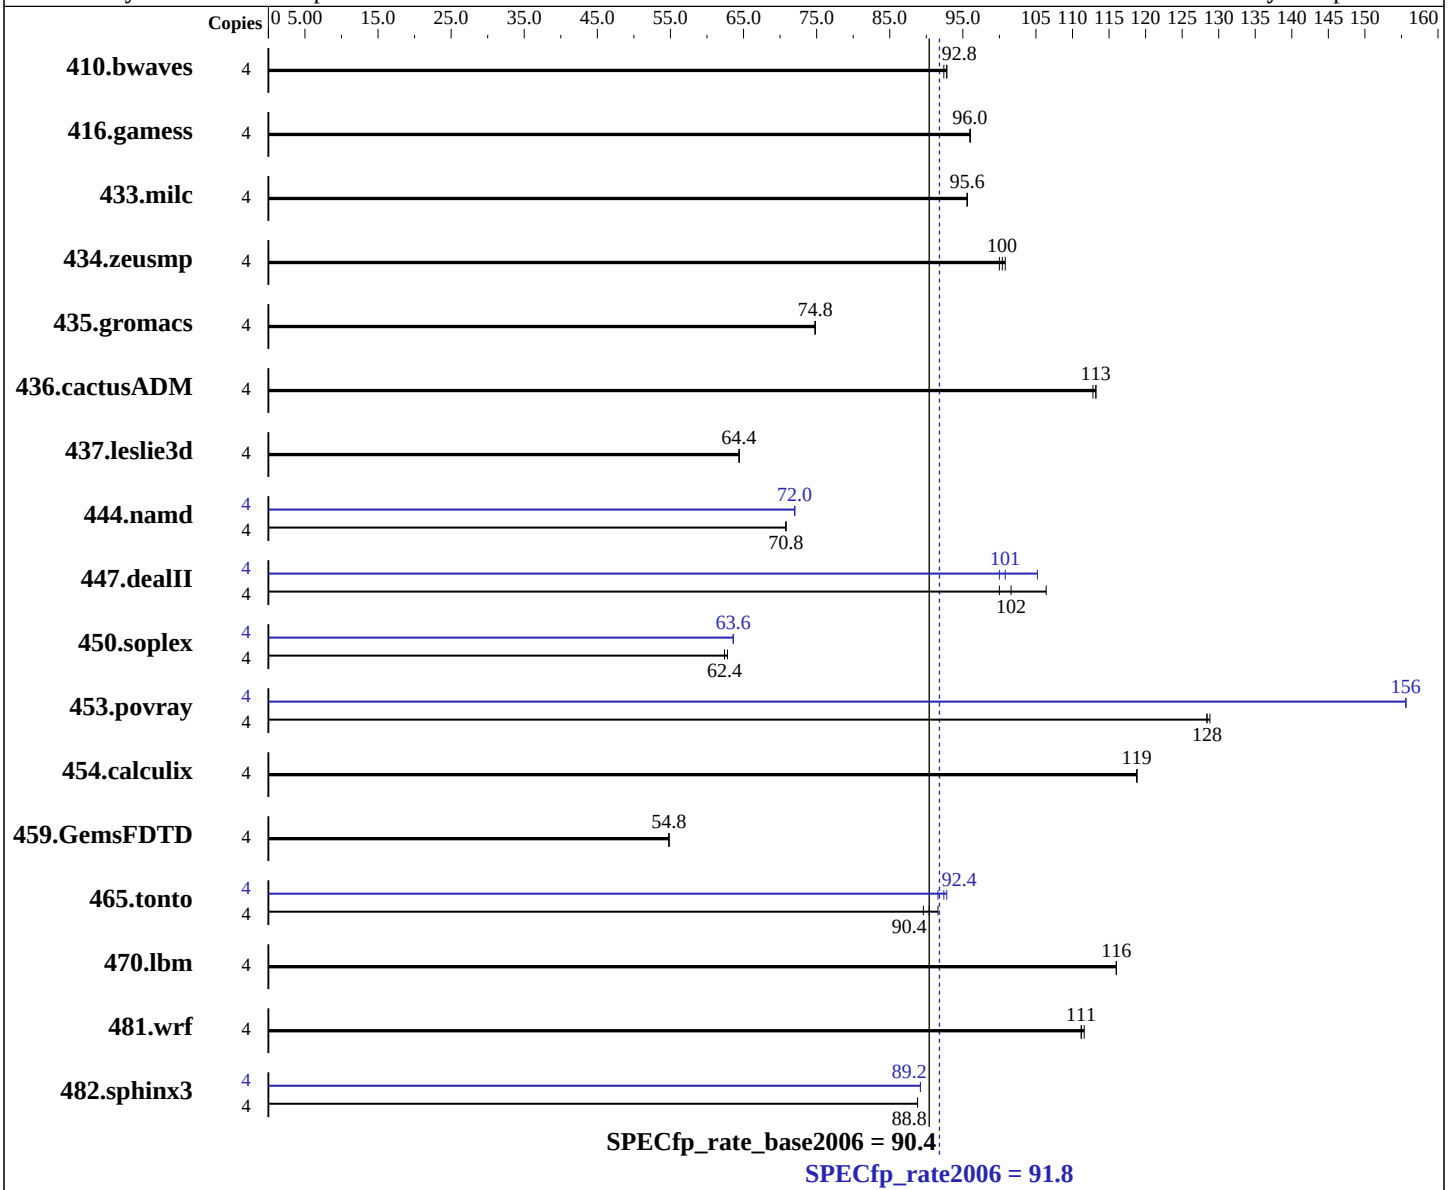

Hardware

CPU Name:	Intel Core i5-2400S
CPU Characteristics:	Intel Turbo Boost Technology up to 3.3 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Windows 7 Ultimate (64-bit)
Compiler:	Intel C++ Compiler XE for Intel64 Version 12.0.3.163 Build 20110217 Intel Visual Fortran Compiler XE for Intel64 Version 12.0.3.163 Build 20110217 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
Auto Parallel:	No
File System:	NTFS

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH67BLB3 Motherboard (Intel Core i5-2400S)

SPECfp_rate2006 = 91.8

SPECfp_rate_base2006 = 90.4

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2011
Hardware Availability: Mar-2011
Software Availability: Apr-2011

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600U-9)
Disk Subsystem: Seagate 1 TB SATA, 7200 RPM
Other Hardware: None

System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 9.01 from http://www.microquill.com/

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	588	92.4	587	92.8	**587**	**92.8**	4	588	92.4	587	92.8	**587**	**92.8**
416.gamess	4	817	96.0	**817**	**96.0**	816	96.0	4	817	96.0	**817**	**96.0**	816	96.0
433.milc	4	384	95.6	**384**	**95.6**	384	95.6	4	384	95.6	**384**	**95.6**	384	95.6
434.zeusmp	4	**362**	**100**	363	100	361	101	4	**362**	**100**	363	100	361	101
435.gromacs	4	382	74.8	**382**	**74.8**	382	74.8	4	382	74.8	**382**	**74.8**	382	74.8
436.cactusADM	4	**423**	**113**	423	113	422	113	4	**423**	**113**	423	113	422	113
437.leslie3d	4	584	64.4	584	64.4	**584**	**64.4**	4	584	64.4	584	64.4	**584**	**64.4**
444.namd	4	453	70.8	452	70.8	**452**	**70.8**	4	**445**	**72.0**	445	72.0	445	72.0
447.dealII	4	458	100	**451**	**102**	430	106	4	**455**	**101**	435	105	458	100
450.soplex	4	**534**	**62.4**	534	62.4	532	62.8	4	526	63.6	**525**	**63.6**	525	63.6
453.povray	4	**166**	**128**	165	129	166	128	4	**137**	**156**	137	156	137	156
454.calculix	4	278	119	**278**	**119**	278	119	4	278	119	**278**	**119**	278	119
459.GemsFDTD	4	**776**	**54.8**	777	54.8	775	54.8	4	**776**	**54.8**	777	54.8	775	54.8
465.tonto	4	430	91.6	439	89.6	**435**	**90.4**	4	425	92.8	**426**	**92.4**	431	91.6
470.lbm	4	473	116	473	116	**473**	**116**	4	473	116	473	116	**473**	**116**
481.wrf	4	**401**	**111**	402	111	401	112	4	**401**	**111**	402	111	401	112
482.sphinx3	4	**879**	**88.8**	879	88.8	879	88.8	4	874	89.2	**874**	**89.2**	874	89.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
The start command with the /affinity switch was used to bind processes to cores
```

General Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 -names:lowercase
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qauto-ilp32 /F1000000000
-link /FORCE:MULTIPLE

C++ benchmarks:
-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qcxx-features
-Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:
-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:
-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qauto-ilp32 /F1000000000
-link /FORCE:MULTIPLE

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -QxAVX -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

444.namd: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

447.dealII: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qscalar-rep- -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

450.soplex: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

453.povray: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Continued on next page

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revB.html
http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revB.xml
http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 20:49:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 May 2011.