SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH67BLB3 Motherboard (Intel Core i3-2100)

SPECfp®2006 = 44.5

SPECfp_base2006 = 43.3

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2011
Hardware Availability: Mar-2011
Software Availability: Apr-2011

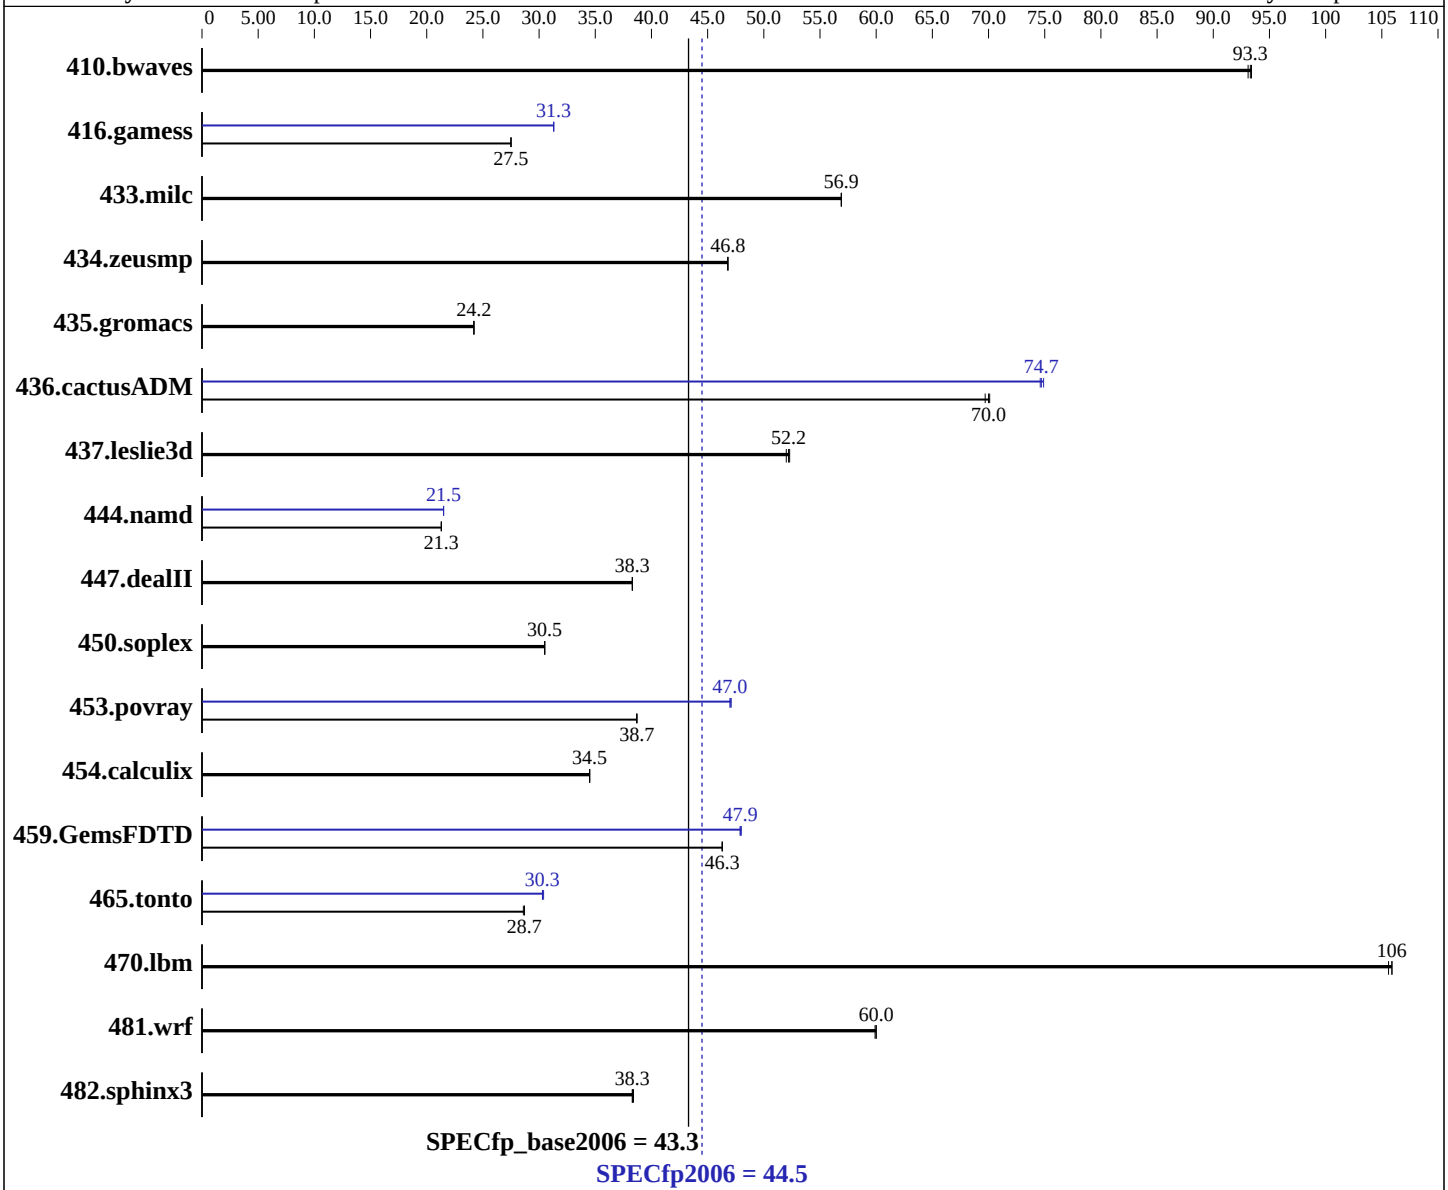

Hardware

CPU Name:	Intel Core i3-2100
CPU Characteristics:	
CPU MHz:	3100
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Windows 7 Ultimate (64-bit)
Compiler:	Intel C++ Compiler XE for Intel64 Version 12.0.3.163 Build 20110217 Intel Visual Fortran Compiler XE for Intel64 Version 12.0.0.104 Build 20101006 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
Auto Parallel:	Yes
File System:	NTFS

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH67BLB3 Motherboard (Intel Core i3-2100)

SPECfp2006 = 44.5

SPECfp_base2006 = 43.3

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2011
Hardware Availability: Mar-2011
Software Availability: Apr-2011

L3 Cache:	3 MB I+D on chip per chip
Other Cache:	None
Memory:	8 GB (2 x 4 GB 2Rx8 PC3-10600U-9)
Disk Subsystem:	Seagate 1 TB SATA, 7200 RPM
Other Hardware:	None

System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 9.01 from http://www.microquill.com/

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	146	93.1	**146**	**93.3**	146	93.4	146	93.1	**146**	**93.3**	146	93.4
416.gamess	713	27.5	**713**	**27.5**	713	27.5	625	31.3	625	31.3	**625**	**31.3**
433.milc	161	56.9	**161**	**56.9**	161	56.9	161	56.9	**161**	**56.9**	161	56.9
434.zeusmp	194	46.8	195	46.8	**194**	**46.8**	194	46.8	195	46.8	**194**	**46.8**
435.gromacs	**295**	**24.2**	295	24.2	295	24.2	**295**	**24.2**	295	24.2	295	24.2
436.cactusADM	172	69.7	**171**	**70.0**	170	70.1	**160**	**74.7**	160	74.9	160	74.6
437.leslie3d	**180**	**52.2**	181	52.0	180	52.3	**180**	**52.2**	181	52.0	180	52.3
444.namd	376	21.3	376	21.3	**376**	**21.3**	372	21.5	372	21.5	**372**	**21.5**
447.dealII	299	38.3	299	38.3	**299**	**38.3**	299	38.3	299	38.3	**299**	**38.3**
450.soplex	273	30.5	**273**	**30.5**	274	30.5	273	30.5	**273**	**30.5**	274	30.5
453.povray	137	38.7	**138**	**38.7**	138	38.7	**113**	**47.0**	113	47.1	113	47.0
454.calculix	239	34.5	**239**	**34.5**	239	34.5	239	34.5	**239**	**34.5**	239	34.5
459.GemsFDTD	229	46.3	229	46.3	**229**	**46.3**	221	48.0	**221**	**47.9**	222	47.9
465.tonto	344	28.6	343	28.7	**343**	**28.7**	324	30.4	**324**	**30.3**	324	30.3
470.lbm	130	106	**130**	**106**	130	106	130	106	**130**	**106**	130	106
481.wrf	186	60.0	186	59.9	**186**	**60.0**	186	60.0	186	59.9	**186**	**60.0**
482.sphinx3	508	38.4	509	38.3	**509**	**38.3**	508	38.4	509	38.3	**509**	**38.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 -names:lowercase
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000

C++ benchmarks:
-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:
-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
/F1000000000

Benchmarks using both Fortran and C:
-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep-
/F1000000000

Continued on next page

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qparallel /F1000000000

465.tonto: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel -Qunroll2 -Qauto-ilp32 /F1000000000

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revB.html
http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revB.xml
http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 20:44:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 May 2011.