SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX223 (Intel Xeon E5640)

SPECfp®_rate2006 = 187

SPECfp_rate_base2006 = 182

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: May-2011
Hardware Availability: Apr-2010
Software Availability: Jan-2011

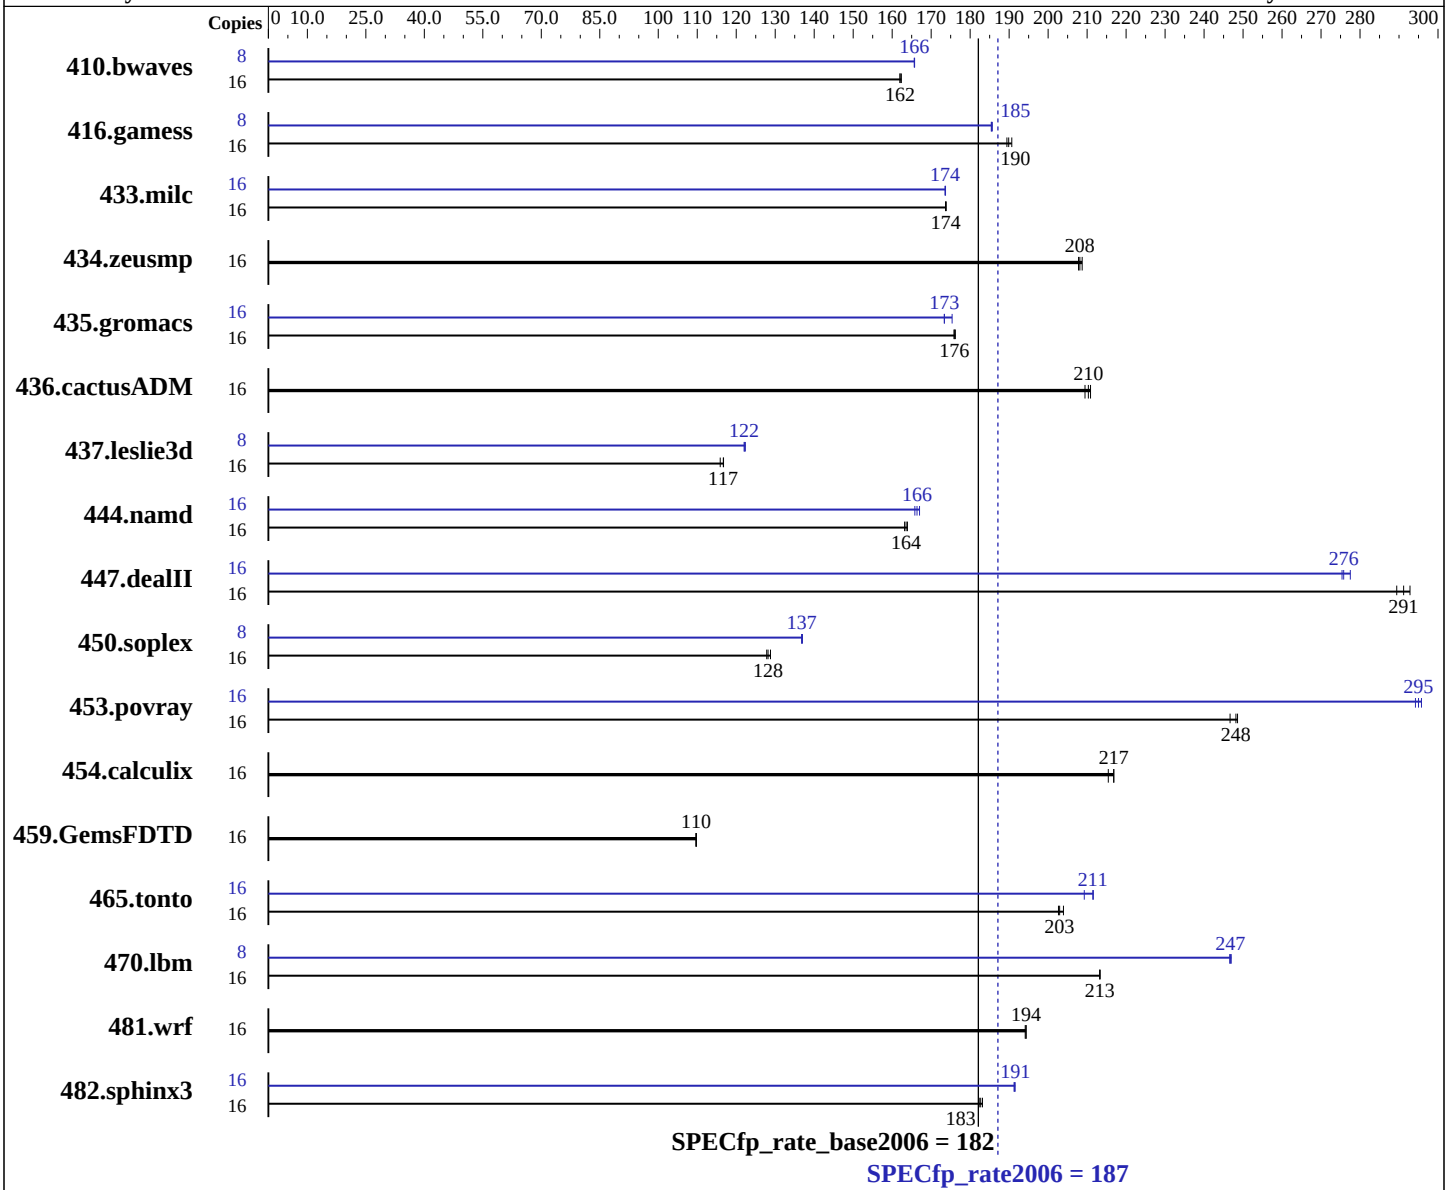

Hardware

CPU Name:	Intel Xeon E5640
CPU Characteristics:	Intel Turbo Boost Technology up to 2.93 GHz
CPU MHz:	2667
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.2 Build 20110112
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX223 (Intel Xeon E5640)

SPECfp_rate2006 = 187

SPECfp_rate_base2006 = 182

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: May-2011
Hardware Availability: Apr-2010
Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-8500R-9, ECC)
Disk Subsystem: 1 x 500 GB SATA-2, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1339	162	1342	162	**1342**	**162**	8	656	166	656	166	**656**	**166**
416.gamess	16	**1650**	**190**	1643	191	1654	189	8	844	186	845	185	**844**	**185**
433.milc	16	**845**	**174**	846	174	845	174	16	846	174	**846**	**174**	846	174
434.zeusmp	16	698	209	**700**	**208**	701	208	16	698	209	**700**	**208**	701	208
435.gromacs	16	**649**	**176**	650	176	648	176	16	**659**	**173**	659	173	651	175
436.cactusADM	16	**909**	**210**	907	211	913	209	16	**909**	**210**	907	211	913	209
437.leslie3d	16	1298	116	**1289**	**117**	1288	117	8	616	122	**616**	**122**	615	122
444.namd	16	783	164	786	163	**785**	**164**	16	**771**	**166**	774	166	768	167
447.dealII	16	**629**	**291**	632	289	625	293	16	660	278	665	275	**664**	**276**
450.soplex	16	**1041**	**128**	1044	128	1036	129	8	**488**	**137**	488	137	487	137
453.povray	16	342	249	**343**	**248**	345	247	16	289	294	288	296	**289**	**295**
454.calculix	16	609	217	613	215	**609**	**217**	16	609	217	613	215	**609**	**217**
459.GemsFDTD	16	1548	110	**1547**	**110**	1546	110	16	1548	110	**1547**	**110**	1546	110
465.tonto	16	772	204	777	203	**776**	**203**	16	752	209	744	212	**745**	**211**
470.lbm	16	1031	213	1031	213	**1031**	**213**	8	445	247	446	247	**445**	**247**
481.wrf	16	**920**	**194**	921	194	920	194	16	**920**	**194**	921	194	920	194
482.sphinx3	16	**1707**	**183**	1703	183	1710	182	16	1630	191	**1630**	**191**	1628	192

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run
```

General Notes

```
This result was measured on the Servidor Itautec MX223.
The Servidor Itautec MX203 and the Servidor Itautec MX223
are electronically equivalent.
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
     435.gromacs: -DSPEC_CPU_LP64 -nofor_main
  436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
      444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
     450.soplex: -DSPEC_CPU_LP64
     453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
  459.GemsFDTD: -DSPEC_CPU_LP64
      465.tonto: -DSPEC_CPU_LP64
       470.lbm: -DSPEC_CPU_LP64
       481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
   482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias
```

Fortran benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static
```

Benchmarks using both Fortran and C:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias
```

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2)
`-no-prec-div`(pass 2) `-prof-use`(pass 2) `-static -auto-ilp32`

470.lbm: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2)
`-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-malloc-options=3`
`-ansi-alias -opt-prefetch -static -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html`
`http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml`
`http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 17:26:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 June 2011.