



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]2006 = 55.8

PowerEdge M910 (Intel Xeon E7-2870, 2.40 GHz)

SPECfp_base2006 = 51.3

CPU2006 license: 55


Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

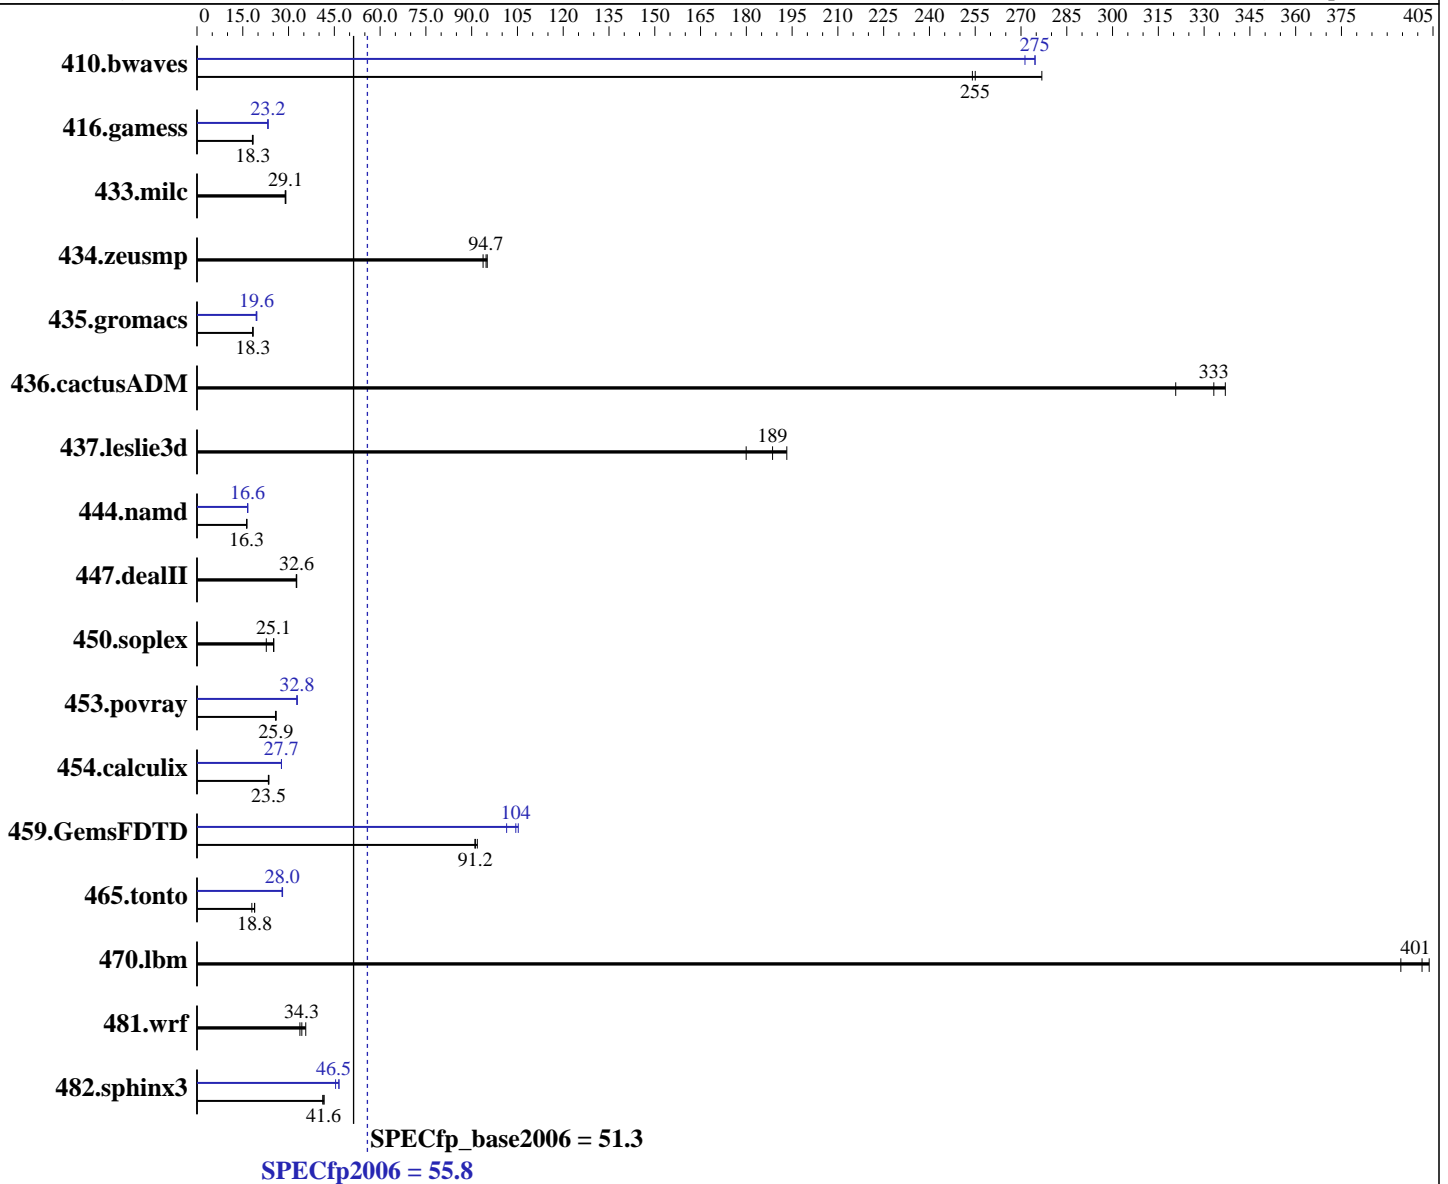

Hardware

CPU Name: Intel Xeon E7-2870
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0 Update 3
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 55.8

PowerEdge M910 (Intel Xeon E7-2870, 2.40 GHz)

SPECfp_base2006 = 51.3

CPU2006 license: 55

Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (32 x 8 GB 4Rx8 PC3L-8500R-7, ECC)
Disk Subsystem: 1 x 146 GB 15000 RPM SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	53.5	254	53.3	255	49.1	277	49.5	275	49.5	275	50.1	271
416.gamess	1070	18.3	1067	18.3	1078	18.2	841	23.3	843	23.2	842	23.2
433.milc	316	29.1	318	28.9	316	29.1	316	29.1	318	28.9	316	29.1
434.zeusmp	96.1	94.7	95.7	95.1	97.1	93.7	96.1	94.7	95.7	95.1	97.1	93.7
435.gromacs	391	18.2	390	18.3	389	18.4	365	19.6	365	19.6	368	19.4
436.cactusADM	35.5	337	37.3	321	35.9	333	35.5	337	37.3	321	35.9	333
437.leslie3d	52.2	180	48.6	193	49.8	189	52.2	180	48.6	193	49.8	189
444.namd	492	16.3	493	16.3	492	16.3	483	16.6	483	16.6	483	16.6
447.dealII	352	32.5	350	32.7	351	32.6	352	32.5	350	32.7	351	32.6
450.soplex	367	22.7	333	25.1	331	25.2	367	22.7	333	25.1	331	25.2
453.povray	207	25.7	205	25.9	205	25.9	162	32.8	162	32.8	162	32.8
454.calculix	351	23.5	353	23.4	351	23.5	298	27.7	298	27.7	298	27.7
459.GemsFDTD	117	91.1	116	91.9	116	91.2	105	101	102	104	101	105
465.tonto	548	18.0	522	18.8	520	18.9	352	28.0	353	27.9	351	28.0
470.lbm	34.0	404	34.2	401	34.8	394	34.0	404	34.2	401	34.8	394
481.wrf	331	33.7	325	34.3	313	35.6	331	33.7	325	34.3	313	35.6
482.sphinx3	468	41.6	473	41.2	469	41.6	419	46.5	419	46.5	429	45.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900> /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)
Logical Processor = Disabled (Default = Enabled)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 55.8

PowerEdge M910 (Intel Xeon E7-2870, 2.40 GHz)

SPECfp_base2006 = 51.3

CPU2006 license: 55

Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

General Notes

OMP_NUM_THREADS set to number of cores
Binaries were compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 55.8

PowerEdge M910 (Intel Xeon E7-2870, 2.40 GHz)

SPECfp_base2006 = 51.3

CPU2006 license: 55

Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 55.8

PowerEdge M910 (Intel Xeon E7-2870, 2.40 GHz)

SPECfp_base2006 = 51.3

CPU2006 license: 55

Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 55.8

PowerEdge M910 (Intel Xeon E7-2870, 2.40 GHz)

SPECfp_base2006 = 51.3

CPU2006 license: 55

Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 17:33:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 June 2011.