



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

### SPECint®\_rate2006 = 137

## CELSIUS W410, Intel Core i5-2500

### SPECint\_rate\_base2006 = 130

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2011

Hardware Availability: Mar-2011

Software Availability: Jan-2011

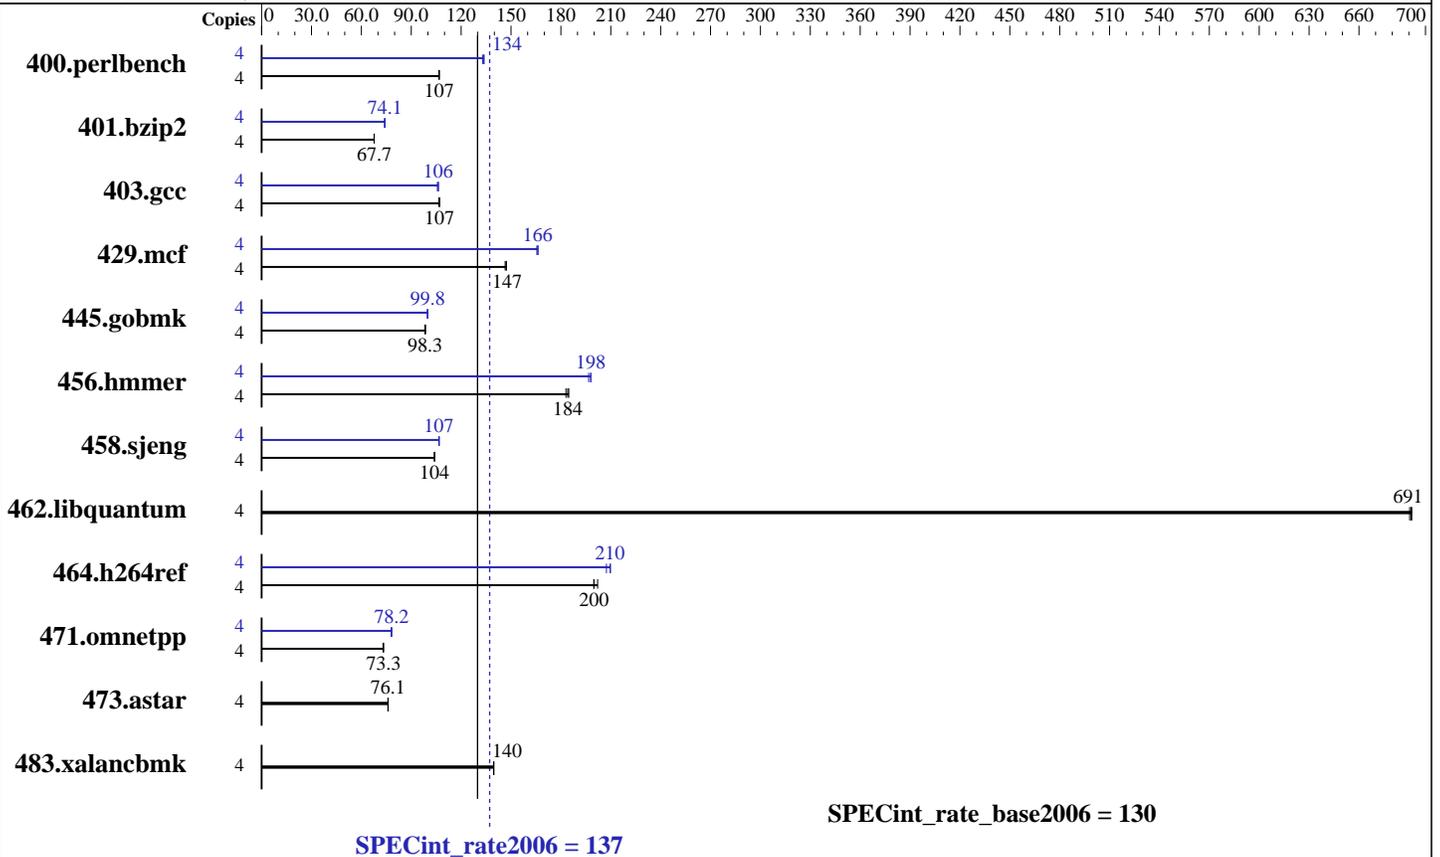

SPECint\_rate\_base2006 = 130

### Hardware

CPU Name: Intel Core i5-2500  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.7 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600U-9)  
 Disk Subsystem: 1 x SATA II, 400 GB, 7200 rpm  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP1, kernel 2.6.32.12-0.6-default  
 Compiler: Intel C++ Compiler XE for applications running on Intel 64 Version 12.0.2.137 Build 20110112  
 Auto Parallel: No  
 File System: ext3  
 System State: Run Level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 137

CELSIUS W410, Intel Core i5-2500

SPECint\_rate\_base2006 = 130

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Jun-2011  
Hardware Availability: Mar-2011  
Software Availability: Jan-2011

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	366	107	366	107	<b>366</b>	<b>107</b>	4	294	133	292	134	<b>292</b>	<b>134</b>
401.bzip2	4	<b>570</b>	<b>67.7</b>	570	67.7	571	67.6	4	520	74.3	<b>521</b>	<b>74.1</b>	523	73.9
403.gcc	4	302	107	301	107	<b>301</b>	<b>107</b>	4	303	106	305	106	<b>303</b>	<b>106</b>
429.mcf	4	248	147	249	146	<b>248</b>	<b>147</b>	4	220	166	219	166	<b>220</b>	<b>166</b>
445.gobmk	4	427	98.2	425	98.6	<b>427</b>	<b>98.3</b>	4	421	99.7	420	100	<b>420</b>	<b>99.8</b>
456.hammer	4	204	183	<b>203</b>	<b>184</b>	202	185	4	188	198	190	197	<b>189</b>	<b>198</b>
458.sjeng	4	<b>466</b>	<b>104</b>	465	104	466	104	4	453	107	<b>454</b>	<b>107</b>	454	107
462.libquantum	4	<b>120</b>	<b>691</b>	120	692	120	690	4	<b>120</b>	<b>691</b>	120	692	120	690
464.h264ref	4	443	200	438	202	<b>443</b>	<b>200</b>	4	427	207	422	210	<b>422</b>	<b>210</b>
471.omnetpp	4	342	73.0	<b>341</b>	<b>73.3</b>	341	73.4	4	320	78.2	321	78.0	<b>320</b>	<b>78.2</b>
473.astar	4	370	76.0	369	76.1	<b>369</b>	<b>76.1</b>	4	370	76.0	369	76.1	<b>369</b>	<b>76.1</b>
483.xalancbmk	4	<b>198</b>	<b>140</b>	198	140	198	140	4	<b>198</b>	<b>140</b>	198	140	198	140

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run  
Huge pages were not configured for this run

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 137

CELSIUS W410, Intel Core i5-2500

SPECint\_rate\_base2006 = 130

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Jun-2011  
Hardware Availability: Mar-2011  
Software Availability: Jan-2011

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/opt/smartheap/ia32 -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32
```

```
400.perlbench: icc -m64
```

```
401.bzip2: icc -m64
```

```
456.hmmer: icc -m64
```

```
458.sjeng: icc -m64
```

C++ benchmarks:

```
icpc -m32
```

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmer: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 137

CELSIUS W410, Intel Core i5-2500

SPECint\_rate\_base2006 = 130

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Jun-2011  
Hardware Availability: Mar-2011  
Software Availability: Jan-2011

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xAVX -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias  
-auto-ilp32

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/opt/smartheap/ia32 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 137

CELSIUS W410, Intel Core i5-2500

SPECint\_rate\_base2006 = 130

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2011

Hardware Availability: Mar-2011

Software Availability: Jan-2011

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

[http://www.spec.org/cpu2006/flags/Fujitsu\\_CELSIUS\\_Platform.html](http://www.spec.org/cpu2006/flags/Fujitsu_CELSIUS_Platform.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

[http://www.spec.org/cpu2006/flags/Fujitsu\\_CELSIUS\\_Platform.xml](http://www.spec.org/cpu2006/flags/Fujitsu_CELSIUS_Platform.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 21:54:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 July 2011.