



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp[®]2006 = **57.7**

Express5800/R120b-1 (Intel Xeon X5650)

SPECfp_base2006 = **54.3**

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Mar-2011

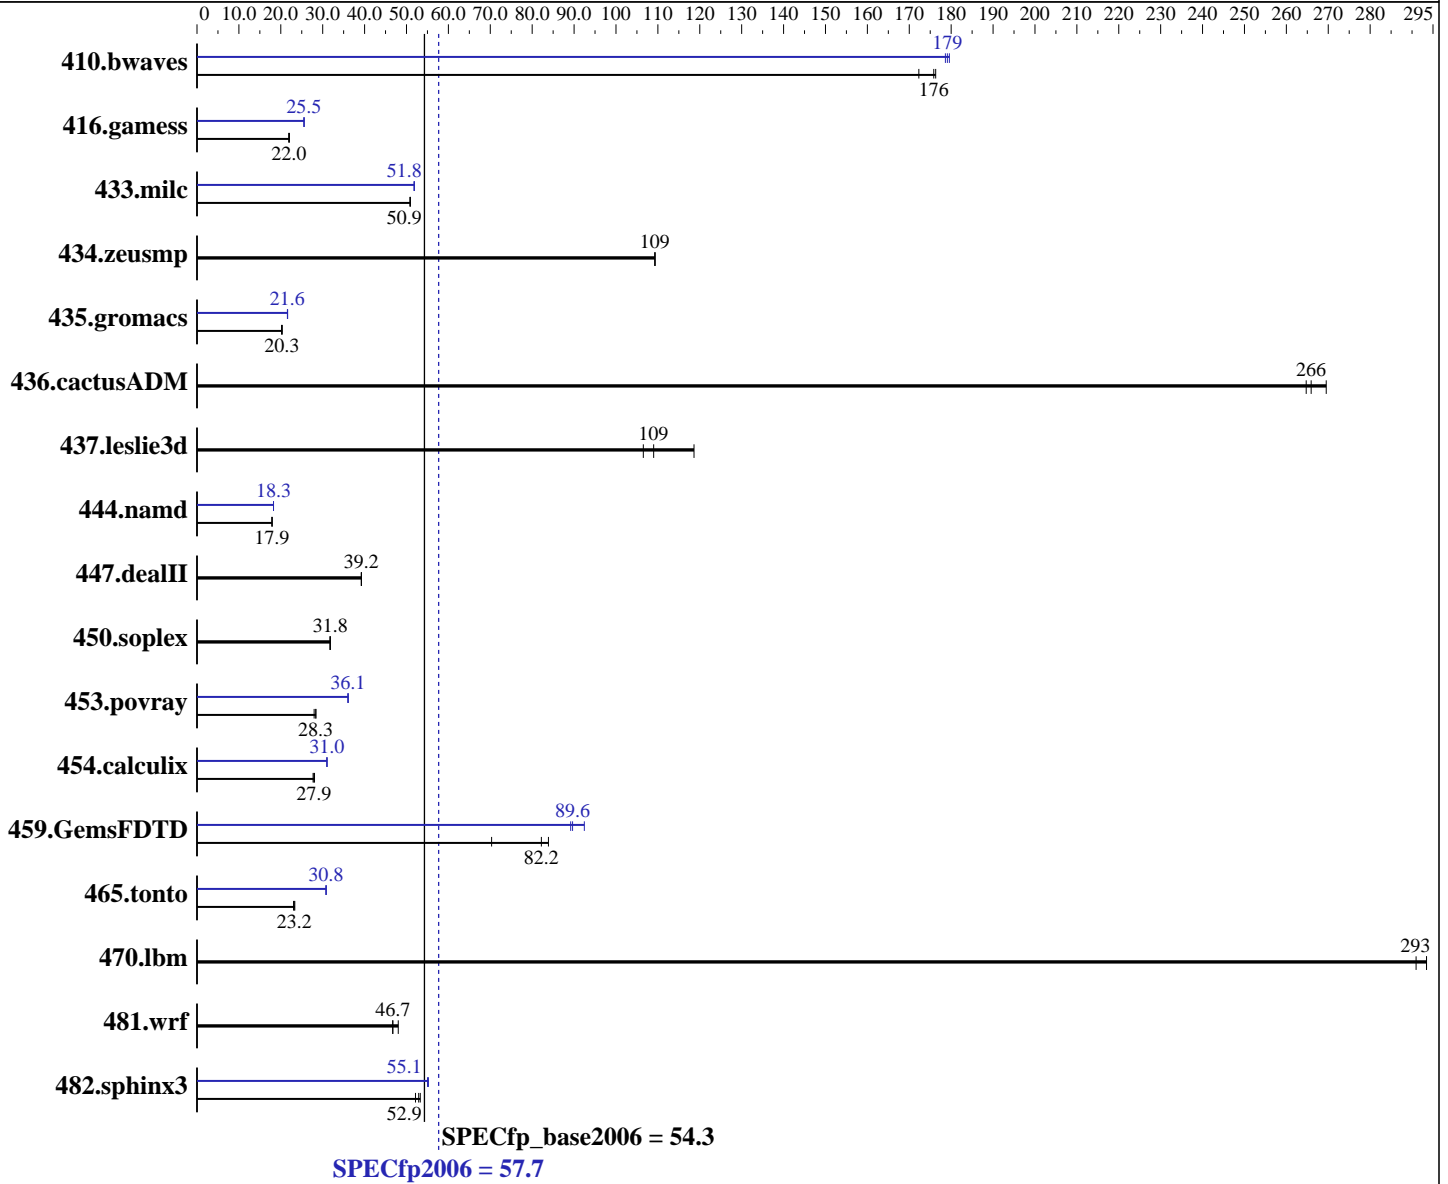

Hardware

CPU Name: Intel Xeon X5650
 CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64, Version 12.0.3.174 Build 20110309
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = **57.7**

Express5800/R120b-1 (Intel Xeon X5650)

SPECfp_base2006 = **54.3**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Mar-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	77.1	176	77.3	176	78.9	172	76.1	179	75.7	180	75.9	179
416.gamess	891	22.0	888	22.1	894	21.9	766	25.6	766	25.5	767	25.5
433.milc	180	50.9	180	50.9	181	50.9	177	51.8	177	51.9	177	51.8
434.zeusmp	83.3	109	83.3	109	83.3	109	83.3	109	83.3	109	83.3	109
435.gromacs	352	20.3	351	20.3	354	20.2	330	21.6	331	21.6	331	21.6
436.cactusADM	44.3	270	45.1	265	44.9	266	44.3	270	45.1	265	44.9	266
437.leslie3d	86.2	109	79.2	119	88.2	107	86.2	109	79.2	119	88.2	107
444.namd	448	17.9	448	17.9	448	17.9	439	18.3	439	18.3	439	18.3
447.dealII	291	39.3	292	39.2	292	39.2	291	39.3	292	39.2	292	39.2
450.soplex	262	31.8	263	31.8	262	31.8	262	31.8	263	31.8	262	31.8
453.povray	188	28.3	190	28.0	187	28.4	147	36.1	148	36.0	148	36.1
454.calculix	294	28.0	296	27.9	298	27.7	266	31.0	266	31.0	266	31.0
459.GemsFDTD	126	83.9	129	82.2	151	70.3	118	89.6	115	92.4	119	89.2
465.tonto	427	23.0	424	23.2	422	23.3	319	30.8	320	30.8	319	30.8
470.lbm	46.8	293	46.8	293	47.2	291	46.8	293	46.8	293	47.2	291
481.wrf	233	48.0	239	46.7	239	46.7	233	48.0	239	46.7	239	46.7
482.sphinx3	368	52.9	366	53.3	374	52.1	353	55.2	354	55.0	354	55.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 1800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

BIOS Settings:
Hyper-Threading Technology: Disabled
Performance/Watt: Traditional
Server Class: Custom
Data Reuse Optimization: Disabled
Memory Voltage: Normal



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 57.7

Express5800/R120b-1 (Intel Xeon X5650)

SPECfp_base2006 = 54.3

CPU2006 license: 9006

Test date: Jun-2011

Test sponsor: NEC Corporation

Hardware Availability: Feb-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

General Notes

OMP_NUM_THREADS set to number of cores
The Express5800/R120b-1 and
the Express5800/R120b-2 models are electronically equivalent.
The results have been measured on the Express5800/R120b-1 model.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation	SPECfp2006 =	57.7
Express5800/R120b-1 (Intel Xeon X5650)	SPECfp_base2006 =	54.3

CPU2006 license: 9006	Test date: Jun-2011
Test sponsor: NEC Corporation	Hardware Availability: Feb-2011
Tested by: NEC Corporation	Software Availability: Mar-2011

Base Optimization Flags (Continued)

C++ benchmarks:
 -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:
 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
 -ansi-alias

Peak Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks:
 icpc -m64

Fortran benchmarks:
 ifort -m64

Benchmarks using both Fortran and C:
 icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
 -parallel

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 57.7

Express5800/R120b-1 (Intel Xeon X5650)

SPECfp_base2006 = 54.3

CPU2006 license: 9006

Test date: Jun-2011

Test sponsor: NEC Corporation

Hardware Availability: Feb-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

Peak Optimization Flags (Continued)

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation	SPECfp2006 =	57.7
Express5800/R120b-1 (Intel Xeon X5650)	SPECfp_base2006 =	54.3

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Mar-2011

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revF.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 21:29:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 July 2011.