



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp<sup>®</sup>\_rate2006 = 466

IBM System x3755 M3 (AMD Opteron 6128 HE)

SPECfp\_rate\_base2006 = 420

CPU2006 license: 11


Test date: Jul-2011

Test sponsor: IBM Corporation

Hardware Availability: Dec-2010

Tested by: IBM Corporation

Software Availability: Jul-2010

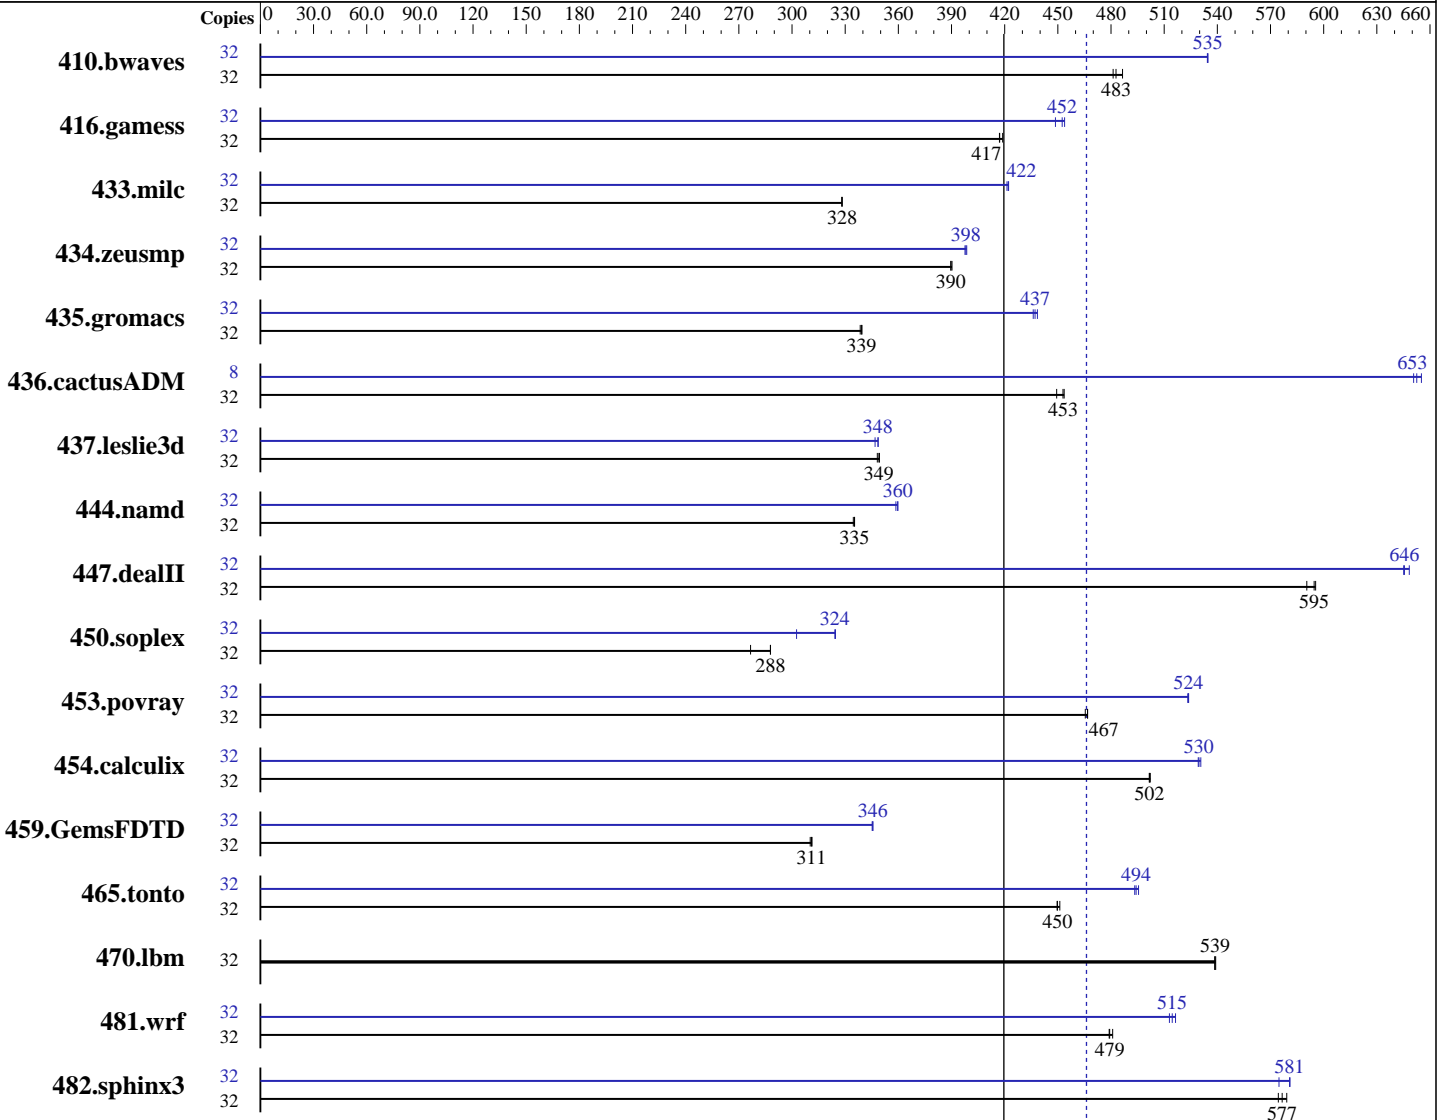

SPECfp\_rate\_base2006 = 420

SPECfp\_rate2006 = 466

### Hardware

CPU Name: AMD Opteron 6128 HE  
 CPU Characteristics:  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp\_rate2006 = 466

IBM System x3755 M3 (AMD Opteron 6128 HE)

SPECfp\_rate\_base2006 = 420

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Jul-2011  
Hardware Availability: Dec-2010  
Software Availability: Jul-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 4 cores  
Other Cache: None  
Memory: 128 GB (32 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
Other Hardware: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	904	481	<u>901</u>	<u>483</u>	894	486	32	<u>814</u>	<u>535</u>	813	535	814	534
416.gamess	32	<u>1502</u>	<u>417</u>	1496	419	1502	417	32	1397	449	1381	454	<u>1385</u>	<u>452</u>
433.milc	32	895	328	895	328	<u>895</u>	<u>328</u>	32	696	422	697	421	<u>696</u>	<u>422</u>
434.zeusmp	32	746	390	<u>747</u>	<u>390</u>	747	390	32	<u>731</u>	<u>398</u>	732	398	731	399
435.gromacs	32	673	339	675	338	<u>673</u>	<u>339</u>	32	<u>523</u>	<u>437</u>	524	436	521	438
436.cactusADM	32	<u>844</u>	<u>453</u>	843	454	851	449	8	147	651	146	655	<u>147</u>	<u>653</u>
437.leslie3d	32	861	349	<u>862</u>	<u>349</u>	864	348	32	<u>863</u>	<u>348</u>	863	349	867	347
444.namd	32	765	335	767	335	<u>765</u>	<u>335</u>	32	716	359	713	360	<u>714</u>	<u>360</u>
447.dealII	32	620	590	615	595	<u>616</u>	<u>595</u>	32	565	648	<u>567</u>	<u>646</u>	567	645
450.soplex	32	965	277	927	288	<u>927</u>	<u>288</u>	32	882	303	822	325	<u>823</u>	<u>324</u>
453.povray	32	<u>365</u>	<u>467</u>	365	467	366	465	32	325	524	325	523	<u>325</u>	<u>524</u>
454.calculix	32	<u>526</u>	<u>502</u>	526	502	526	502	32	<u>498</u>	<u>530</u>	497	531	499	529
459.GemsFDTD	32	1094	310	<u>1092</u>	<u>311</u>	1091	311	32	983	345	982	346	<u>983</u>	<u>346</u>
465.tonto	32	698	451	<u>700</u>	<u>450</u>	700	450	32	638	493	635	496	<u>637</u>	<u>494</u>
470.lbm	32	<u>816</u>	<u>539</u>	816	539	816	539	32	<u>816</u>	<u>539</u>	816	539	816	539
481.wrf	32	746	479	<u>746</u>	<u>479</u>	743	481	32	<u>695</u>	<u>515</u>	692	516	697	513
482.sphinx3	32	1077	579	<u>1082</u>	<u>577</u>	1086	574	32	1073	581	1085	575	<u>1074</u>	<u>581</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
  
Set vm/nr\_hugepages=28672 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 466

IBM System x3755 M3 (AMD Opteron 6128 HE)

SPECfp\_rate\_base2006 = 420

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2011

Hardware Availability: Dec-2010

Software Availability: Jul-2010

## Platform Notes

BIOS Settings:  
Operating Mode set to Performance Mode

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/root/speccpu\_2011-03-22/speccpu\_rate\_revC-3/amd1002mc-rate-libs-revC/64:/root/speccpu\_2011-03-22/speccpu\_rate\_revC-3/amd1002mc-rate-libs-revC/32"

OMP\_NUM\_THREADS = "4"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on SLES10 SP2 with binutils 2.18

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
opencc openf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 466

IBM System x3755 M3 (AMD Opteron 6128 HE)

SPECfp\_rate\_base2006 = 420

CPU2006 license: 11

Test date: Jul-2011

Test sponsor: IBM Corporation

Hardware Availability: Dec-2010

Tested by: IBM Corporation

Software Availability: Jul-2010

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -OPT:malloc\_alg=1 -HP:bdt=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -static -INLINE:aggressive=on  
-OPT:malloc\_alg=1 -HP:bdt=2m

Fortran benchmarks:

-march=barcelona -mso -Ofast -HP

Benchmarks using both Fortran and C:

-march=barcelona -mso -Ofast -OPT:malloc\_alg=1 -HP:bdt=2m -HP

## Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 466

IBM System x3755 M3 (AMD Opteron 6128 HE)

SPECfp\_rate\_base2006 = 420

CPU2006 license: 11

Test date: Jul-2011

Test sponsor: IBM Corporation

Hardware Availability: Dec-2010

Tested by: IBM Corporation

Software Availability: Jul-2010

## Peak Portability Flags (Continued)

453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
 -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1  
 -CG:local\_sched\_alg=1 -CG:locs\_shallow\_depth=1  
 -HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=2  
 -CG:sse\_cse\_regs=0 -CG:locs\_shallow\_depth=1 -CG:cmp\_peep=on  
 -CG:local\_sched\_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:ignore\_feedback=off  
 -CG:local\_sched\_alg=2 -CG:load\_exe=0 -CG:compute\_to=on  
 -OPT:unroll\_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealIII: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on  
 -LNO:opt=0 -fno-emit-exceptions -m32  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on  
 -CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
 -OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
 -OPT:fold\_unsigned\_relops=on -OPT:malloc\_alg=1  
 -CG:load\_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 466

IBM System x3755 M3 (AMD Opteron 6128 HE)

SPECfp\_rate\_base2006 = 420

CPU2006 license: 11

Test date: Jul-2011

Test sponsor: IBM Corporation

Hardware Availability: Dec-2010

Tested by: IBM Corporation

Software Availability: Jul-2010

## Peak Optimization Flags (Continued)

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on  
-LNO:blocking=off -LNO:prefetch\_ahead=5  
-LNO:ignore\_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m  
-CG:cmp\_peep=on

416.gamess: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off  
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll\_size=256  
-CG:cmp\_peep=on -GRA:prioritize\_by\_density=on -HP

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:local\_sched\_alg=1  
-HP

465.tonto: -march=barcelona -mso -Ofast  
-OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -IPA:plimit=525 -HP

### Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2  
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch\_ahead=1  
-HP:bdt=2m:heap=2m -LANG:heap\_allocation\_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load\_exe=0  
-CG:ptr\_load\_use=0 -CG:local\_sched\_alg=2 -CG:compute\_to=on  
-LNO:prefetch\_ahead=30 -WOPT:unroll=2  
-GRA:optimize\_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on -m3dnow  
-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20101109.html>  
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20101109.xml>  
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 466

IBM System x3755 M3 (AMD Opteron 6128 HE)

SPECfp\_rate\_base2006 = 420

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Jul-2011  
Hardware Availability: Dec-2010  
Software Availability: Jul-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 22:50:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 August 2011.