



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp[®]_rate2006 = 68.4

ASUSTek M4A89GTD PRO/USB3 (Phenom II X4 970)

SPECfp_rate_base2006 = 67.7

CPU2006 license: 13


Test date: Jun-2011

Test sponsor: Intel Corporation

Hardware Availability: Feb-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

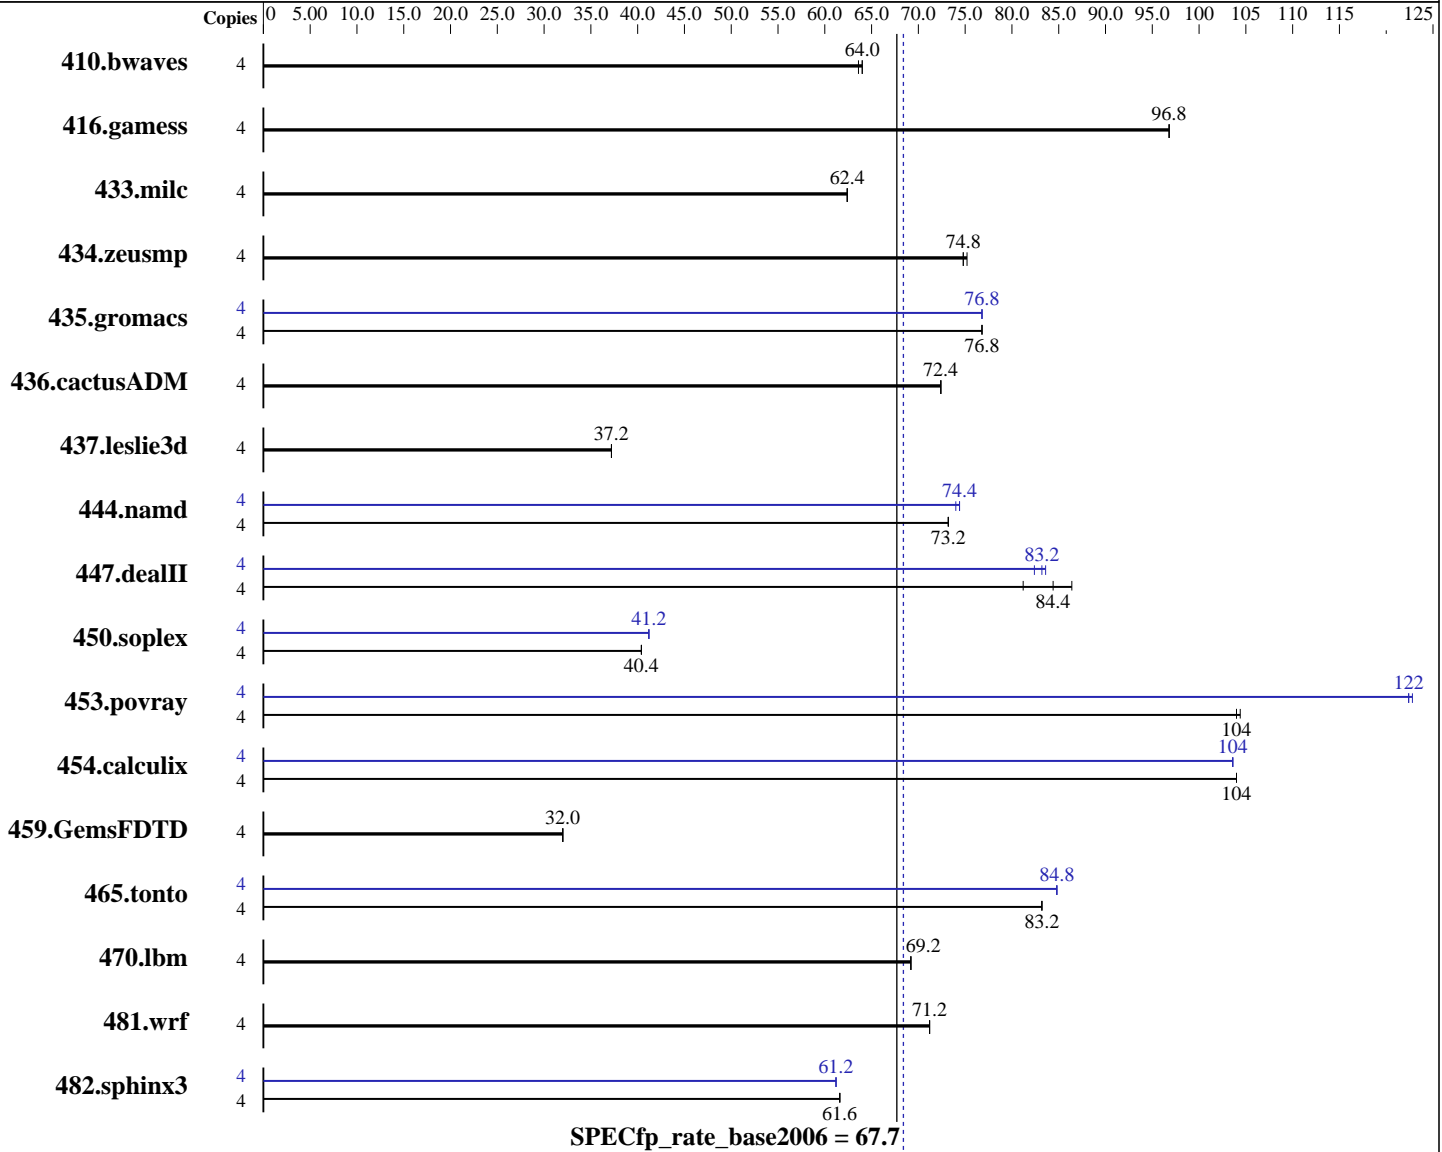

Hardware

CPU Name: AMD Phenom II X4 970
 CPU Characteristics:
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Windows 7 Ultimate (64-bit)
 Compiler: Intel C++ Compiler XE for Intel 64
 Version 12.0.3.176 Build 20110309
 Intel Visual Fortran Compiler XE for Intel 64
 Version 12.0.3.176 Build 20110309
 Microsoft Visual Studio 2008 Professional SP1
 (for libraries)

Auto Parallel: No
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp_rate2006 = 68.4

ASUSTek M4A89GTD PRO/USB3 (Phenom II X4 970)

SPECfp_rate_base2006 = 67.7

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2011
Hardware Availability: Feb-2011
Software Availability: Apr-2011

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 4 GB (2 x 2 GB 2Rx4 PC3-10600U-9)
Disk Subsystem: 1 TB Seagate SATA, 7200 RPM
Other Hardware: None

System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	852	63.6	850	64.0	847	64.0	4	852	63.6	850	64.0	847	64.0
416.gamess	4	810	96.8	810	96.8	810	96.8	4	810	96.8	810	96.8	810	96.8
433.milc	4	588	62.4	587	62.4	588	62.4	4	588	62.4	587	62.4	588	62.4
434.zeusmp	4	486	74.8	487	74.8	484	75.2	4	486	74.8	487	74.8	484	75.2
435.gromacs	4	371	76.8	371	76.8	371	76.8	4	373	76.8	373	76.8	373	76.8
436.cactusADM	4	662	72.4	661	72.4	662	72.4	4	662	72.4	661	72.4	662	72.4
437.leslie3d	4	1007	37.2	1013	37.2	1011	37.2	4	1007	37.2	1013	37.2	1011	37.2
444.namd	4	437	73.2	437	73.2	437	73.2	4	432	74.4	432	74.4	433	74.0
447.dealII	4	543	84.4	562	81.2	530	86.4	4	547	83.6	551	83.2	556	82.4
450.soplex	4	822	40.4	822	40.4	822	40.4	4	811	41.2	810	41.2	810	41.2
453.povray	4	204	104	204	104	204	104	4	173	123	174	122	174	122
454.calculix	4	318	104	318	104	317	104	4	319	104	318	104	319	104
459.GemsFDTD	4	1325	32.0	1326	32.0	1327	32.0	4	1325	32.0	1326	32.0	1327	32.0
465.tonto	4	474	83.2	473	83.2	474	83.2	4	463	84.8	464	84.8	465	84.8
470.lbm	4	794	69.2	794	69.2	794	69.2	4	794	69.2	794	69.2	794	69.2
481.wrf	4	628	71.2	627	71.2	626	71.2	4	628	71.2	627	71.2	626	71.2
482.sphinx3	4	1268	61.6	1269	61.6	1270	61.6	4	1271	61.2	1274	61.2	1274	61.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
The start command with the /affinity switch was used to bind processes to cores

General Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

Base Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp_rate2006 = 68.4

ASUSTek M4A89GTD PRO/USB3 (Phenom II X4 970)

SPECfp_rate_base2006 = 67.7

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2011
Hardware Availability: Feb-2011
Software Availability: Apr-2011

Base Compiler Invocation (Continued)

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 -names:lowercase
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
/arch:SSE3 -Qipo -O3 -Qprec-div- -Qansi-alias -Qauto-ilp32
/F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:
/arch:SSE3 -Qipo -O3 -Qprec-div- -Qansi-alias -Qcxx-features
-Qauto-ilp32 /F1000000000 shlw64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:
/arch:SSE3 -Qipo -O3 -Qprec-div- -Qansi-alias /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:
/arch:SSE3 -Qipo -O3 -Qprec-div- -Qansi-alias -Qauto-ilp32
/F1000000000 -link /FORCE:MULTIPLE



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp_rate2006 = 68.4

ASUSTek M4A89GTD PRO/USB3 (Phenom II X4 970)

SPECfp_rate_base2006 = 67.7

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2011
Hardware Availability: Feb-2011
Software Availability: Apr-2011

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99
C++ benchmarks:
icl -Qvc9
Fortran benchmarks:
ifort
Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: /arch:SSE3 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE
C++ benchmarks:
444.namd: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
shlW64M.lib -link /FORCE:MULTIPLE
447.dealII: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qscalar-rep- -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE
450.soplex: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE
453.povray: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp_rate2006 = 68.4

ASUSTek M4A89GTD PRO/USB3 (Phenom II X4 970)

SPECfp_rate_base2006 = 67.7

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2011
Hardware Availability: Feb-2011
Software Availability: Apr-2011

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes
416.gamess: basepeak = yes
434.zeusmp: basepeak = yes
437.leslie3d: basepeak = yes
459.GemsFDTD: basepeak = yes
465.tonto: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
/F1000000000 -link /FORCE:MULTIPLE
436.cactusADM: basepeak = yes
454.calculix: /arch:SSE3 -Qipo -O3 -Qprec-div- -Qauto-ilp32
/F1000000000 -link /FORCE:MULTIPLE
481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.html>
<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.20110719.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.xml>
<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.20110719.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 22:25:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 September 2011.