SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX600 S6, Intel Xeon E7-4830, 2.13 GHz

SPECfp®_rate2006 = 579

SPECfp_rate_base2006 = 554

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jun-2011
Hardware Availability: Jul-2011
Software Availability: Jan-2011

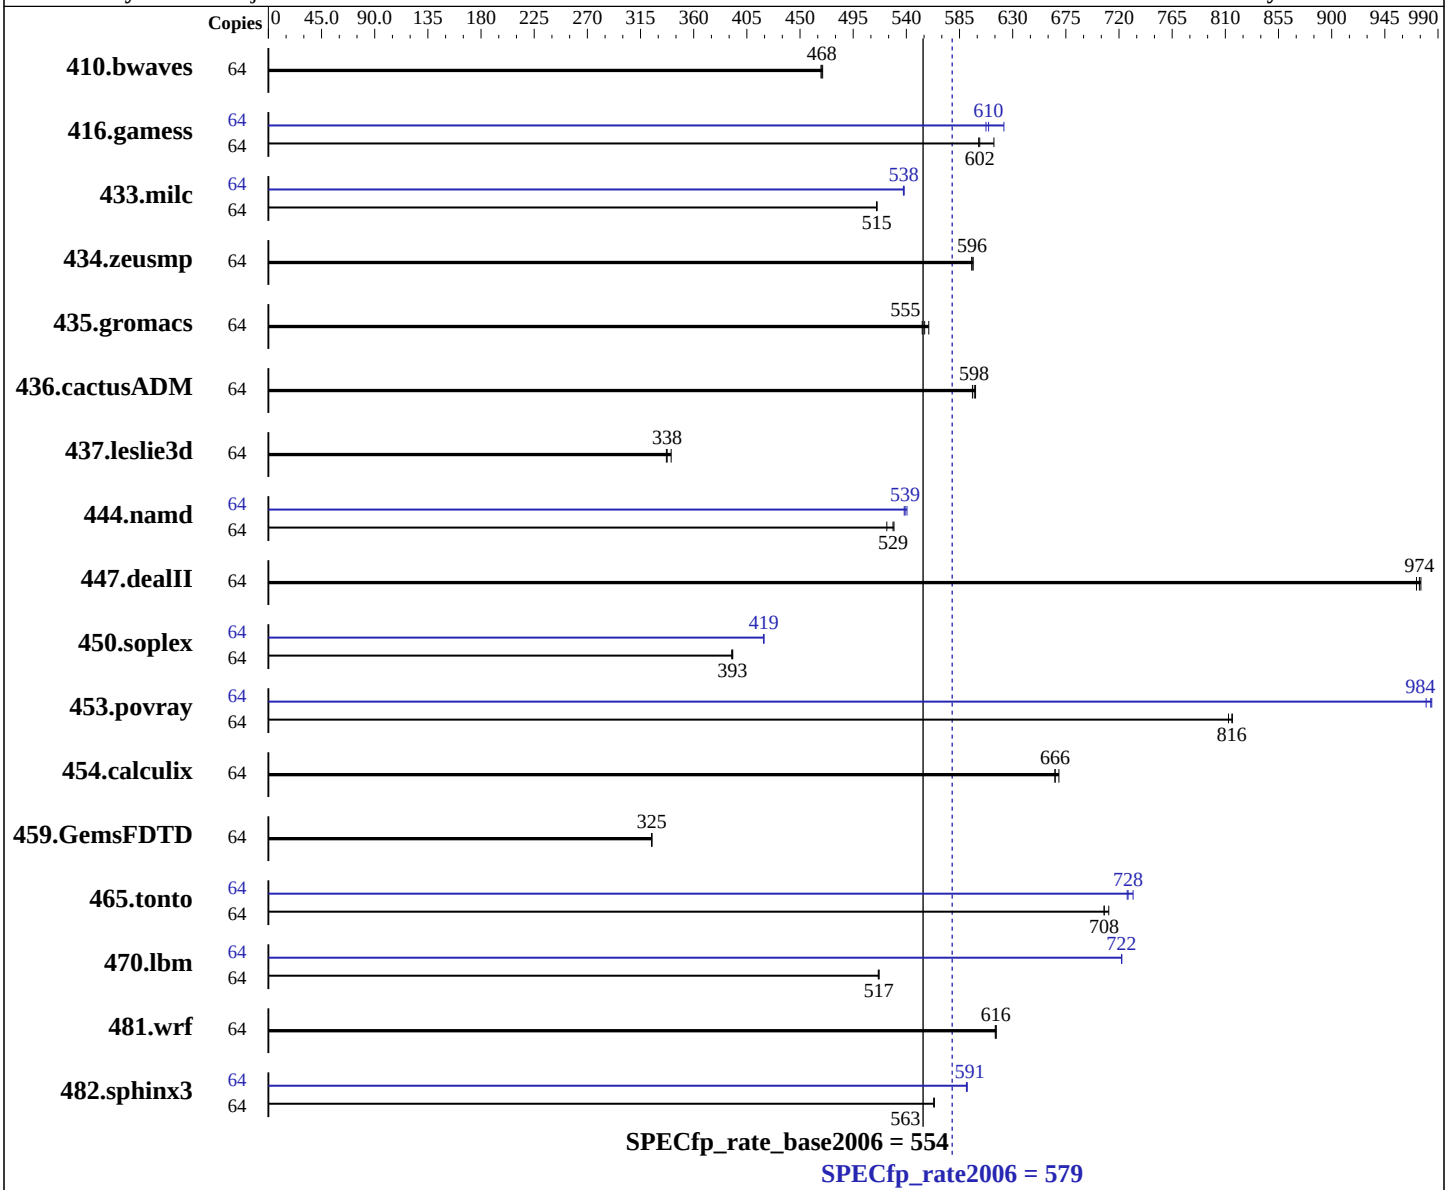

Hardware

CPU Name:	Intel Xeon E7-4830
CPU Characteristics:	Intel Turbo Boost Technology up to 2.40 GHz
CPU MHz:	2133
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	2,3,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX600 S6, Intel Xeon E7-4830, 2.13 GHz

SPECfp_rate2006 = 579

SPECfp_rate_base2006 = 554

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jun-2011
Hardware Availability: Jul-2011
Software Availability: Jan-2011

L3 Cache: 24 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (64 x 8 GB 4Rx8 PC3L-8500R-7, ECC)
Disk Subsystem: 1 x SAS, 600 GB, 10000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	**1857**	**468**	1860	468	1854	469	64	**1857**	**468**	1860	468	1854	469
416.gamess	64	**2081**	**602**	2084	601	2040	614	64	2013	623	2063	607	**2056**	**610**
433.milc	64	1141	515	**1141**	**515**	1140	515	64	**1092**	**538**	1093	537	1092	538
434.zeusmp	64	976	597	**978**	**596**	978	595	64	976	597	**978**	**596**	978	595
435.gromacs	64	817	559	826	553	**823**	**555**	64	817	559	826	553	**823**	**555**
436.cactusADM	64	**1280**	**598**	1283	596	1278	599	64	**1280**	**598**	1283	596	1278	599
437.leslie3d	64	1786	337	**1782**	**338**	1765	341	64	1786	337	**1782**	**338**	1765	341
444.namd	64	969	530	**971**	**529**	981	523	64	954	538	950	541	**952**	**539**
447.dealII	64	753	972	**752**	**974**	751	976	64	753	972	**752**	**974**	751	976
450.soplex	64	1358	393	**1359**	**393**	1361	392	64	**1273**	**419**	1272	419	1274	419
453.povray	64	**417**	**816**	419	813	417	816	64	**346**	**984**	347	980	346	985
454.calculix	64	789	669	793	666	**793**	**666**	64	789	669	793	666	**793**	**666**
459.GemsFDTD	64	2093	324	**2092**	**325**	2092	325	64	2093	324	**2092**	**325**	2092	325
465.tonto	64	890	707	**890**	**708**	885	711	64	**865**	**728**	866	727	860	732
470.lbm	64	**1702**	**517**	1703	516	1701	517	64	1218	722	**1218**	**722**	1217	722
481.wrf	64	1160	616	1162	615	**1161**	**616**	64	1160	616	1162	615	**1161**	**616**
482.sphinx3	64	2215	563	**2214**	**563**	2213	564	64	**2110**	**591**	2109	591	2111	591

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 57600 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

```
BIOS configuration:
Data Reuse Optimization = Disable
Performance/Power Setting = Traditional
```

General Notes

```
Binaries were compiled on RHEL5.5
For information about Fujitsu please visit: http://www.fujitsu.com
```

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Continued on next page

Peak Optimization Flags (Continued)

465.tonto (continued):
`-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT`

Benchmarks using both Fortran and C:

435.gromacs: `basepeak = yes`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.html`
`http://www.spec.org/cpu2006/flags/Fujitsu-Platform.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.xml`
`http://www.spec.org/cpu2006/flags/Fujitsu-Platform.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 22:36:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 September 2011.