



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp[®]_rate2006 = 2640

IBM Power 780 (3.92 GHz, 64 core)

SPECfp_rate_base2006 = 2410

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2011

Hardware Availability: Oct-2011

Software Availability: Oct-2011

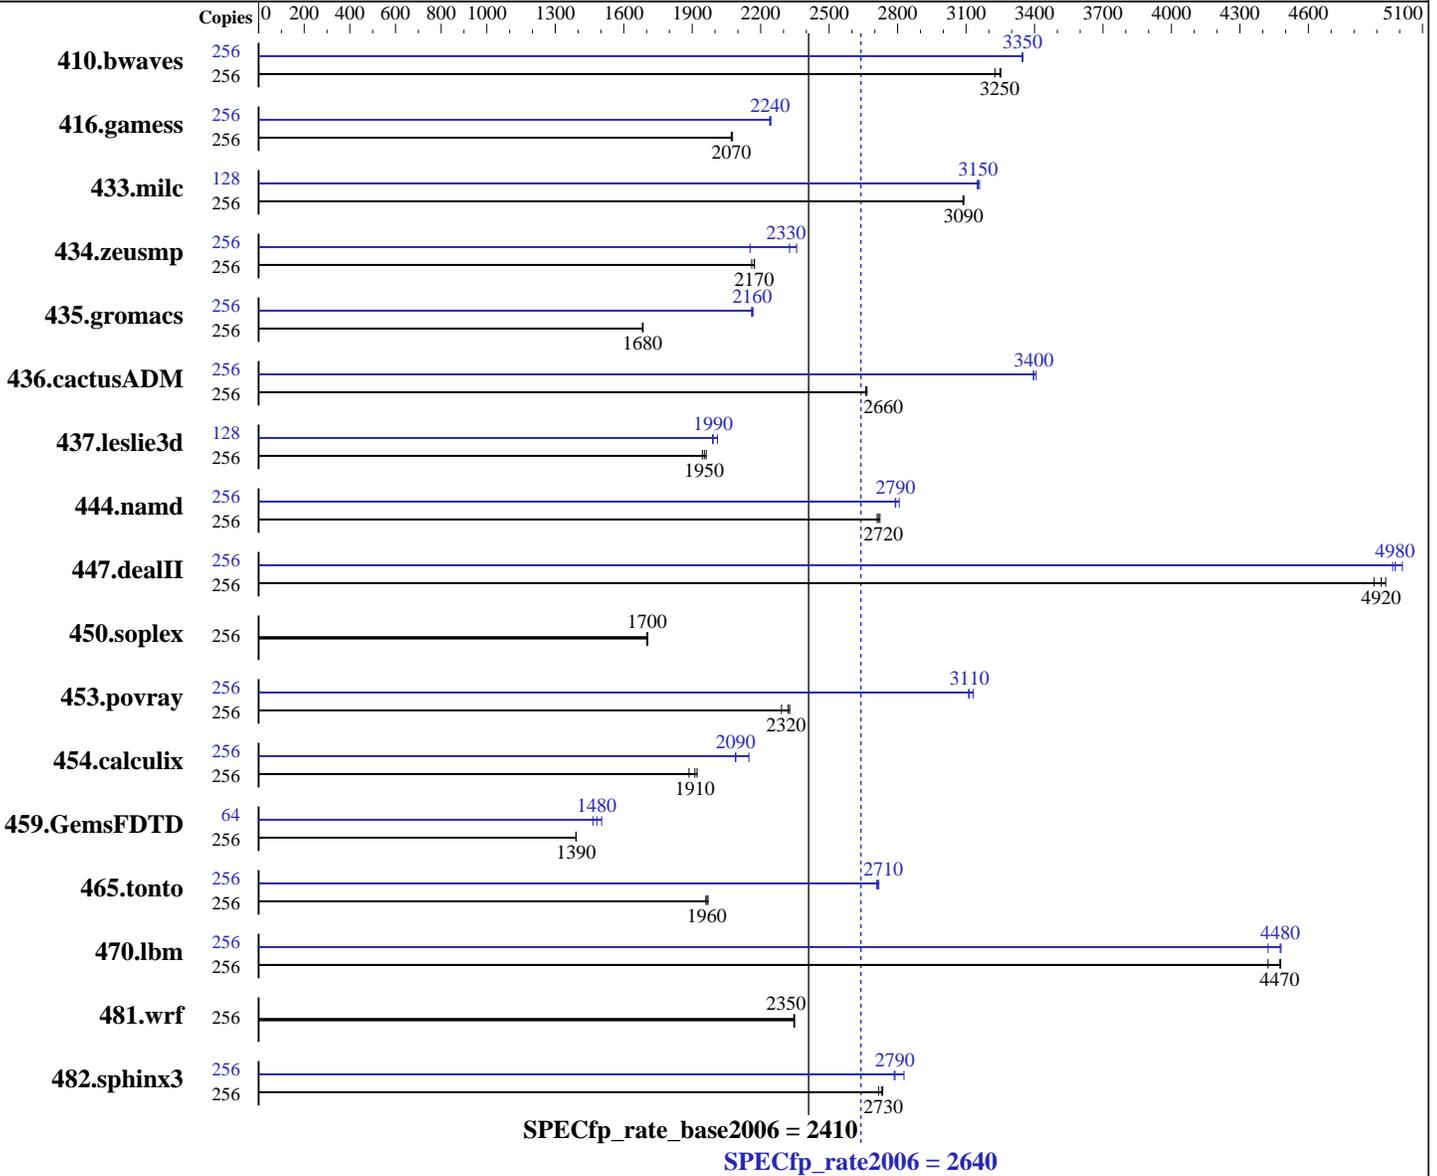

Hardware

CPU Name: POWER7
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.948 GHz
 CPU MHz: 3920
 FPU: Integrated
 CPU(s) enabled: 64 cores, 8 chips, 8 cores/chip, 4 threads/core
 CPU(s) orderable: 16,32,48,64 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core

Software

Operating System: IBM AIX V7.1
 Compiler: C/C++: Version 11.1 of IBM XL C/C++ for AIX; Fortran: Version 13.1 of IBM XL Fortran for AIX
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2640

IBM Power 780 (3.92 GHz, 64 core)

SPECfp_rate_base2006 = 2410

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2011
Hardware Availability: Oct-2011
Software Availability: Oct-2011

Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 4 MB I+D on chip per core
Other Cache: None
Memory: 512 GB (64 x 8 GB) DDR3 1066 MHz
Disk Subsystem: 12 x 146.8 GB Raid0 SAS SFF 15K RPM
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	256	1078	3230	<u>1071</u>	<u>3250</u>	1070	3250	256	<u>1039</u>	<u>3350</u>	1039	3350	1040	3350
416.gamess	256	2414	2080	2420	2070	<u>2419</u>	<u>2070</u>	256	2238	2240	<u>2236</u>	<u>2240</u>	2233	2240
433.milc	256	761	3090	761	3090	<u>761</u>	<u>3090</u>	128	<u>373</u>	<u>3150</u>	373	3150	372	3160
434.zeusmp	256	1078	2160	1072	2170	<u>1073</u>	<u>2170</u>	256	988	2360	<u>1001</u>	<u>2330</u>	1082	2150
435.gromacs	256	1085	1680	1087	1680	<u>1086</u>	<u>1680</u>	256	844	2170	<u>845</u>	<u>2160</u>	846	2160
436.cactusADM	256	<u>1150</u>	<u>2660</u>	1150	2660	1147	2670	256	<u>901</u>	<u>3400</u>	898	3410	901	3390
437.leslie3d	256	1227	1960	1238	1940	<u>1232</u>	<u>1950</u>	128	<u>604</u>	<u>1990</u>	598	2010	605	1990
444.namd	256	<u>756</u>	<u>2720</u>	754	2720	757	2710	256	731	2810	736	2790	<u>735</u>	<u>2790</u>
447.dealII	256	<u>595</u>	<u>4920</u>	593	4940	599	4890	256	589	4970	<u>588</u>	<u>4980</u>	584	5010
450.soplex	256	<u>1254</u>	<u>1700</u>	1255	1700	1252	1710	256	<u>1254</u>	<u>1700</u>	1255	1700	1252	1710
453.povray	256	<u>587</u>	<u>2320</u>	585	2330	594	2290	256	438	3110	<u>437</u>	<u>3110</u>	435	3130
454.calculix	256	1120	1890	<u>1105</u>	<u>1910</u>	1099	1920	256	<u>1010</u>	<u>2090</u>	983	2150	1011	2090
459.GemsFDTD	256	1952	1390	<u>1952</u>	<u>1390</u>	1954	1390	64	452	1500	464	1460	<u>458</u>	<u>1480</u>
465.tonto	256	1286	1960	<u>1282</u>	<u>1960</u>	1279	1970	256	<u>929</u>	<u>2710</u>	927	2720	930	2710
470.lbm	256	785	4480	795	4420	<u>786</u>	<u>4470</u>	256	<u>786</u>	<u>4480</u>	785	4480	795	4420
481.wrf	256	1219	2350	1218	2350	<u>1218</u>	<u>2350</u>	256	1219	2350	1218	2350	<u>1218</u>	<u>2350</u>
482.sphinx3	256	<u>1828</u>	<u>2730</u>	1824	2730	1837	2720	256	1764	2830	<u>1789</u>	<u>2790</u>	1792	2780

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

C/C++ compiler update to August 2011 PTF
Version: 11.01.0000.0007
Fortran compiler updated to August 2011 PTF
Version: 13.01.0000.0007

Peak Tuning Notes

fdpr binary optimization tool used for 416.gamess
with options -O4 -cbpth -1 -sdp -1 -m power7
fdpr binary optimization tool used for 433.milc
with options -O4 -nodp -m power7
fdpr binary optimization tool used for 434.zeusmp
with options -O4 -vrox -nodp -m power7

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2640

IBM Power 780 (3.92 GHz, 64 core)

SPECfp_rate_base2006 = 2410

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2011

Hardware Availability: Oct-2011

Software Availability: Oct-2011

Peak Tuning Notes (Continued)

fdpr binary optimization tool used for 436.cactusADM
 with options -O3 -lu -1 -nodp -sdp 9 -m power7
 fdpr binary optimization tool used for 437.leslie3d
 with options -O4 -vrox -m power7
 fdpr binary optimization tool used for 450.soplex
 with options -O3 -lu -1 -nodp -sdp 9 -m power7
 fdpr binary optimization tool used for 453.povray
 with options -O3 -cbpth -1 -m power7
 fdpr binary optimization tool used for 459.GemsFDTD
 with options -O3 -cbpth -1 -m power7
 fdpr binary optimization tool used for 465.tonto
 with options -O4 -m power7
 fdpr binary optimization tool used for 482.sphinx3
 with options -O4 -rcctf 0 -sdp 9 -vrox -m power7

Submit Notes

The config file option 'submit' was used
 to assign benchmark copy to specific kernel thread using
 the "bindprocessor" command (see flags file for details).

Operating System Notes

AIX updated to V7.1 TL 1 SP 1 (7.1.1.1)
 All ulimits set to unlimited.
 25600 16M large pages defined with vmo command

General Notes

Environment variables set by runspec before the start of the run:
 MALLOCOPTIONS = "pool"
 MEMORY_AFFINITY = "MCM"
 XLFRTEOPTS = "intrinthds=1"

Base Compiler Invocation

C benchmarks:
 /usr/vac/bin/xlc -qlanglvl=extc99
 C++ benchmarks:
 /usr/vacpp/bin/xlC
 Fortran benchmarks:
 /usr/bin/xlf95

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2640

IBM Power 780 (3.92 GHz, 64 core)

SPECfp_rate_base2006 = 2410

CPU2006 license: 11

Test date: Sep-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Oct-2011

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95
```

Base Portability Flags

```

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

```

Base Optimization Flags

C benchmarks:

```
-qipa=threads -bmaxdata:0x40000000 -qlargepage -O5 -D_ILS_MACROS
-blpdata
```

C++ benchmarks:

```
-qipa=threads -bmaxdata:0x50000000 -qlargepage -O5 -qsimd -qvecnvml
-D_ILS_MACROS -qrtti=all -D__IBM_FAST_VECTOR
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata
```

Fortran benchmarks:

```
-qipa=threads -bmaxdata:0x60000000 -qlargepage -O5
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Benchmarks using both Fortran and C:

```
-qipa=threads -bmaxdata:0x60000000 -qlargepage -O5 -D_ILS_MACROS
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Base Other Flags

C benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

C++ benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

Fortran benchmarks:

```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2640

IBM Power 780 (3.92 GHz, 64 core)

SPECfp_rate_base2006 = 2410

CPU2006 license: 11

Test date: Sep-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Oct-2011

Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: -qipa=threads -bmaxdata:0x40000000 -O5 -qlargepage
-D_ILS_MACROS -qrestrict -qprefetch=aggressive
-qalign=natural -blpdata -btextpsize:64K

470.lbm: -qipa=threads -bmaxdata:0x30000000 -O5 -D_ILS_MACROS
-blpdata -btextpsize:64K

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2640

IBM Power 780 (3.92 GHz, 64 core)

SPECfp_rate_base2006 = 2410

CPU2006 license: 11

Test date: Sep-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Oct-2011

Peak Optimization Flags (Continued)

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto
-qlargepage -D_ILS_MACROS -blpdata -btextpsize:64K

C++ benchmarks:

444.namd: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -q64
-qsimd -qvecnvml -qlargepage -D_ILS_MACROS -blpdata
-btextpsize:64K

447.dealIII: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O4 -qsimd -qvecnvml -D_ILS_MACROS
-qrtti=all -D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR
-blpdata -btextpsize:64K

450.soplex: basepeak = yes

453.povray: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qsimd
-qvecnvml -qlargepage -D_ILS_MACROS -qalign=natural
-blpdata -btextpsize:64K

Fortran benchmarks:

410.bwaves: -qipa=threads -bmaxdata:0x50000000 -O5 -qlargepage
-qsmallstack=dynlenonheap -blpdata -btextpsize:64K

416.gamess: -qipa=threads -bmaxdata:0x40000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qarch=pwr5 -qlargepage -qalias=nostd
-blpdata -btextpsize:64K

434.zeusmp: -bmaxdata:0x40000000 -O3 -qarch=auto -qtune=auto
-qlargepage -qxl90=nosignedzero -blpdata -btextpsize:64K

437.leslie3d: -qipa=threads -O5 -q64 -blpdata -btextpsize:64K

459.GemsFDTD: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -q64 -qlargepage
-blpdata -btextpsize:64K

465.tonto: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qsimd -qvecnvml -blpdata
-btextpsize:64K

Benchmarks using both Fortran and C:

435.gromacs: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qsimd
-qvecnvml -D_ILS_MACROS -blpdata -btextpsize:64K

436.cactusADM: -qipa=threads -bmaxdata:0x60000000 -O4 -qsimd -qvecnvml
-D_ILS_MACROS -qnostrict -blpdata -btextpsize:64K

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2640

IBM Power 780 (3.92 GHz, 64 core)

SPECfp_rate_base2006 = 2410

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2011

Hardware Availability: Oct-2011

Software Availability: Oct-2011

Peak Optimization Flags (Continued)

454.calculix: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd
-qvecnvml -qlargepage -D_ILS_MACROS -blpdata
-btextpsize:64K

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:

-qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qsuppress=1500-036

Fortran benchmarks (except as noted below):

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

434.zeusmp: -qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20110613.html>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20110613.xml>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 01:30:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 December 2011.