



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6282 SE

SPECint®_rate2006 = 1040

SPECint_rate_base2006 = 907

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

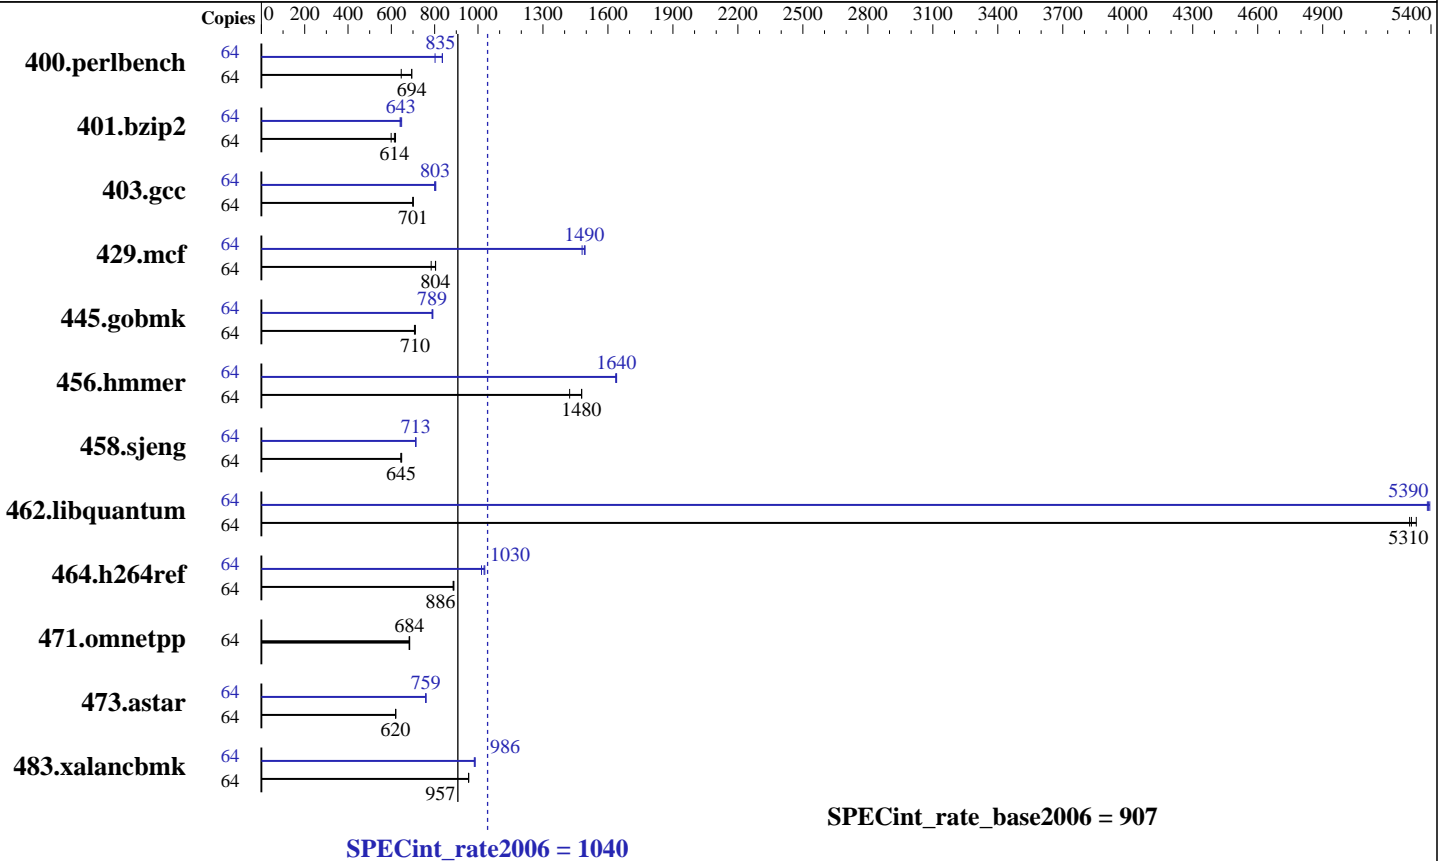

SPECint_rate_base2006 = 907

Hardware

CPU Name: AMD Opteron 6282 SE
 CPU Characteristics: AMD Turbo CORE technology up to 3.30 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 512 KB I on chip per chip,
 64 KB I shared / 2 cores;
 16 KB D on chip per core
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 1000 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.1,
 Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6282 SE

SPECint_rate2006 = 1040

SPECint_rate_base2006 = 907

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	968	646	901	694	<u>901</u>	<u>694</u>	64	<u>749</u>	<u>835</u>	780	802	748	836
401.bzip2	64	1031	599	997	619	<u>1006</u>	<u>614</u>	64	964	641	954	648	<u>960</u>	<u>643</u>
403.gcc	64	<u>735</u>	<u>701</u>	735	701	737	699	64	644	800	<u>642</u>	<u>803</u>	640	805
429.mcf	64	<u>726</u>	<u>804</u>	745	784	725	805	64	<u>391</u>	<u>1490</u>	394	1480	391	1490
445.gobmk	64	950	707	<u>946</u>	<u>710</u>	945	711	64	851	789	848	792	<u>851</u>	<u>789</u>
456.hammer	64	420	1420	404	1480	<u>404</u>	<u>1480</u>	64	365	1640	<u>364</u>	<u>1640</u>	364	1640
458.sjeng	64	1202	644	<u>1200</u>	<u>645</u>	1195	648	64	<u>1087</u>	<u>713</u>	1086	713	1087	713
462.libquantum	64	249	5330	<u>250</u>	<u>5310</u>	250	5300	64	<u>246</u>	<u>5390</u>	246	5390	246	5380
464.h264ref	64	1599	886	<u>1598</u>	<u>886</u>	1593	889	64	1394	1020	<u>1377</u>	<u>1030</u>	1373	1030
471.omnetpp	64	584	685	586	682	<u>585</u>	<u>684</u>	64	584	685	586	682	<u>585</u>	<u>684</u>
473.astar	64	<u>725</u>	<u>620</u>	724	620	725	620	64	592	759	591	760	<u>592</u>	<u>759</u>
483.xalancbmk	64	461	957	462	956	<u>462</u>	<u>957</u>	64	449	983	448	986	<u>448</u>	<u>986</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Set kernel/randomize_va_space=0 in /etc/sysctl.conf

Set vm/nr_hugepages=57344 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/root/work/cpu2006v1.1/amd1104-rate-libs-revA/32:/root/work/cpu2006v1.1/amd1104-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6276 chips + 128GB Memory using RHEL 6.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6282 SE

SPECint_rate2006 = 1040

SPECint_rate_base2006 = 907

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -CG:local_sched_alg=1 -INLINE:aggressive=on
-IPA:plimit=8000 -IPA:small_pu=100 -HP:bd=2m:heap=2m -mso
-LNO:prefetch=2

C++ benchmarks:
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-D__OPEN64_FAST_SET -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6282 SE

SPECint_rate2006 = 1040

SPECint_rate_base2006 = 907

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
 -IPA:plimit=20000 -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
 -WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
 -CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
 -OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
 -HP:bd=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
 -CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
 -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
 -INLINE:aggressive=on -CG:gcm=off
 -GRA:prioritize_by_density=on -m32 -HP:bd=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
 -OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
 -IPA:min_hotness=300 -IPA:pu_reorder=1
 -LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
 -OPT:alias=disjoint -OPT:unroll_times_max=16
 -OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
 -CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
 -HP:bd=2m:heap=2m

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6282 SE

SPECint_rate2006 = 1040

SPECint_rate_base2006 = 907

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:ptr_load_use=0
-CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on
-LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:bd=2m:heap=2m
-WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -mso -OPT:unroll_size=512
-OPT:unroll_times_max=16 -LNO:prefetch=2
-LNO:prefetch_ahead=4 -LNO:pf2=0 -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=15000 -IPA:small_pu=100
-HP:bd=2m:heap=2m,limit=300

464.h264ref: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -IPA:plimit=20000
-OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bd=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-GRA:optimize_boundary=on -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:small_pu=3000 -IPA:plimit=3000
-m32 -HP:bd=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html>

<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml>

<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6282 SE

SPECint_rate2006 = 1040

SPECint_rate_base2006 = 907

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:58:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 November 2011.