SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH61WW motherboard (Intel Pentium G630)

SPECfp®2006 = 32.0

SPECfp_base2006 = 31.3

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2011
Hardware Availability: Sep-2011
Software Availability: Apr-2011

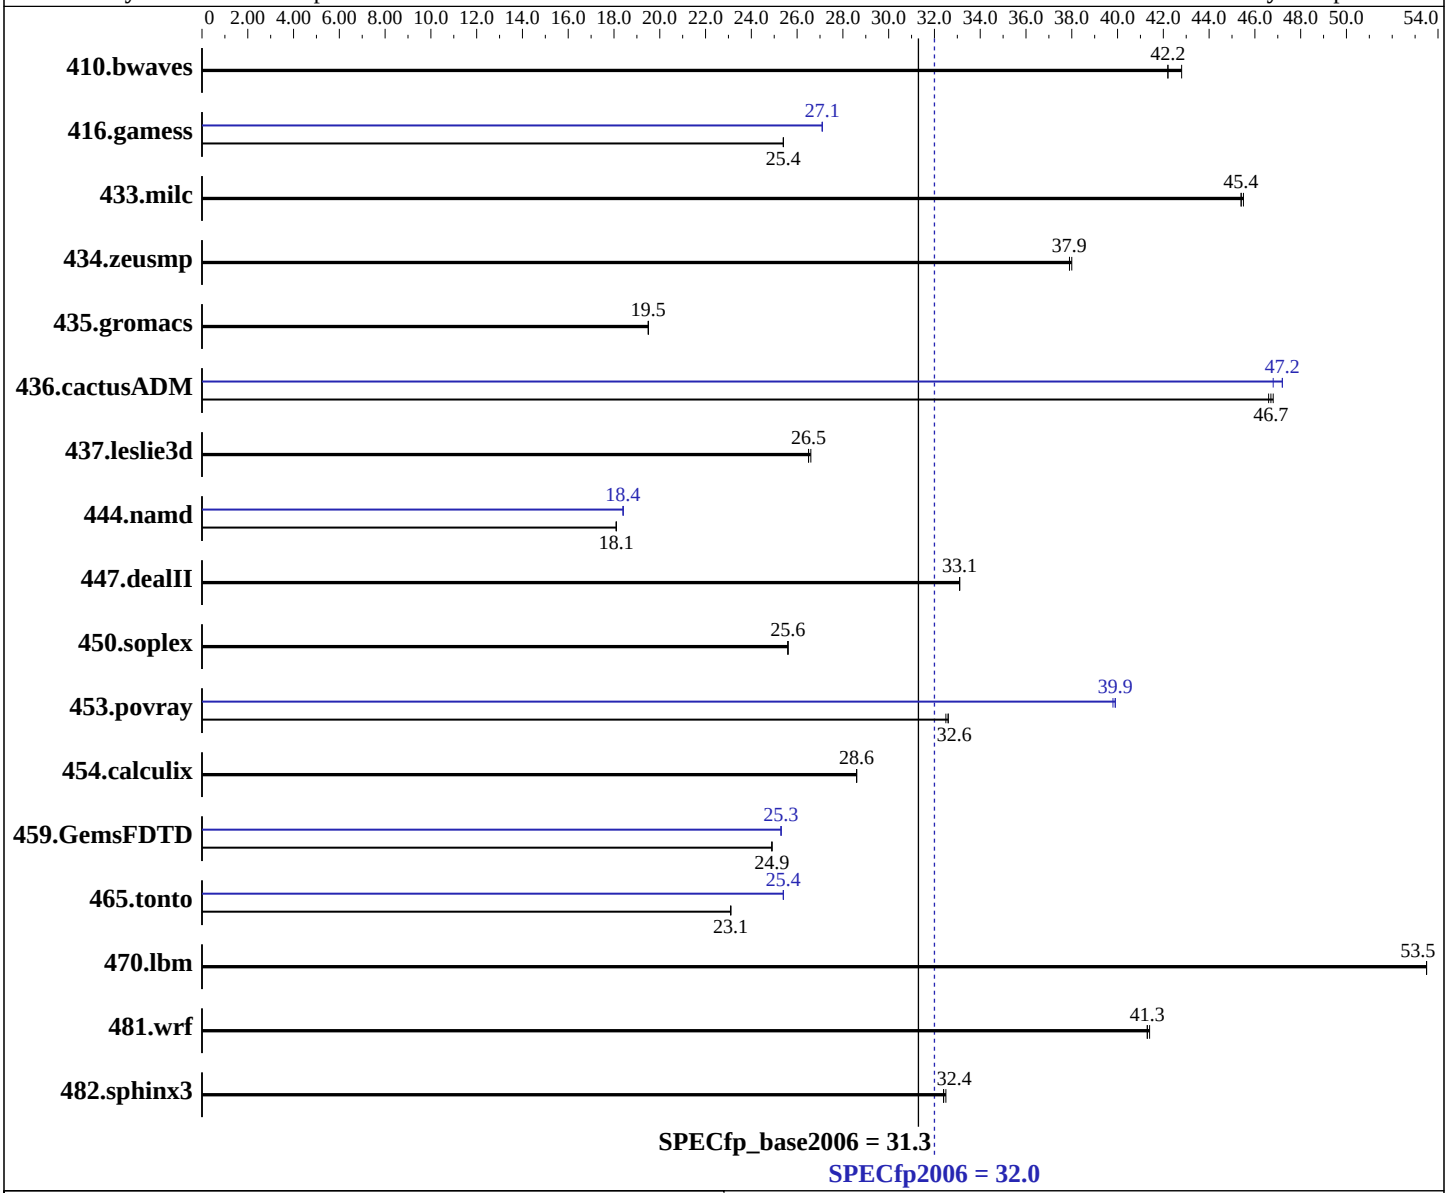

Hardware

CPU Name:	Intel Pentium G630
CPU Characteristics:	
CPU MHz:	2700
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Windows 7 Ultimate (64-bit)
Compiler:	C++: Version 12.0.3.176 of Intel C++ Studio XE for Windows; Fortran: Version 12.0.3.176 of Intel Fortran Studio XE for Windows; Libraries: Version 15.00.30729.01 of Microsoft Visual Studio 2008 Professional SP1
Auto Parallel:	Yes

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH61WW motherboard (Intel Pentium G630)

SPECfp2006 = 32.0

SPECfp_base2006 = 31.3

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2011
Hardware Availability: Sep-2011
Software Availability: Apr-2011

L3 Cache: 3 MB I+D on chip per chip
Other Cache: None
Memory: 2 GB (2 x 1 GB 2Rx4 PC3-10600U-9, running at 1066 MHz)
Disk Subsystem: 1 TB Seagate SATA, 7200 RPM
Other Hardware: None

File System: NTFS
System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 9.01 from http://www.microquill.com/

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	318	42.8	**322**	**42.2**	322	42.2	318	42.8	**322**	**42.2**	322	42.2
416.gamess	**771**	**25.4**	771	25.4	771	25.4	723	27.1	**724**	**27.1**	724	27.1
433.milc	202	45.5	**202**	**45.4**	202	45.4	202	45.5	**202**	**45.4**	202	45.4
434.zeusmp	240	37.9	240	38.0	**240**	**37.9**	240	37.9	240	38.0	**240**	**37.9**
435.gromacs	365	19.5	**365**	**19.5**	365	19.5	365	19.5	**365**	**19.5**	365	19.5
436.cactusADM	256	46.6	255	46.8	**256**	**46.7**	253	47.2	**253**	**47.2**	255	46.8
437.leslie3d	**354**	**26.5**	355	26.5	353	26.6	**354**	**26.5**	355	26.5	353	26.6
444.namd	443	18.1	**443**	**18.1**	443	18.1	435	18.4	**435**	**18.4**	435	18.4
447.dealII	**346**	**33.1**	346	33.1	346	33.1	**346**	**33.1**	346	33.1	346	33.1
450.soplex	**326**	**25.6**	325	25.6	326	25.6	**326**	**25.6**	325	25.6	326	25.6
453.povray	164	32.5	**163**	**32.6**	163	32.6	**133**	**39.9**	133	39.9	134	39.8
454.calculix	289	28.6	289	28.6	**289**	**28.6**	289	28.6	289	28.6	**289**	**28.6**
459.GemsFDTD	**426**	**24.9**	426	24.9	426	24.9	**420**	**25.3**	420	25.3	420	25.3
465.tonto	426	23.1	427	23.1	**426**	**23.1**	387	25.4	387	25.4	**387**	**25.4**
470.lbm	**257**	**53.5**	257	53.5	257	53.5	**257**	**53.5**	257	53.5	257	53.5
481.wrf	**270**	**41.3**	270	41.4	270	41.3	**270**	**41.3**	270	41.4	270	41.3
482.sphinx3	**601**	**32.4**	601	32.5	601	32.4	**601**	**32.4**	601	32.5	601	32.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit
OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc9
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qvc9 -Qstd=c99 ifort
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_P64 -names:lowercase
    416.gamess: -DSPEC_CPU_P64
      433.milc: -DSPEC_CPU_P64
    434.zeusmp: -DSPEC_CPU_P64
    435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
    437.leslie3d: -DSPEC_CPU_P64
      444.namd: -DSPEC_CPU_P64 /TP
     447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
     450.soplex: -DSPEC_CPU_P64
     453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
    454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
      465.tonto: -DSPEC_CPU_P64
       470.lbm: -DSPEC_CPU_P64
       481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
    482.sphinx3: -DSPEC_CPU_P64
```

Base Optimization Flags

C benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F1000000000
```

C++ benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qcxx-features -Qauto-ilp32 /F1000000000 shlW64M.lib
           -link /FORCE:MULTIPLE
```

Fortran benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch /F1000000000
```

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F1000000000

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
shlW64M.lib -link /FORCE:MULTIPLE

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Continued on next page

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qparallel /F1000000000

465.tonto: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel -Qunroll2 -Qauto-ilp32 /F1000000000

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.20111012.html
http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.20111012.xml
http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings-revC.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH61WW motherboard (Intel Pentium G630)

SPECfp2006 = 32.0

SPECfp_base2006 = 31.3

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2011
Hardware Availability: Sep-2011
Software Availability: Apr-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:53:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 November 2011.