SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3250 M4 (Intel Pentium G630)

SPECfp®2006 = 39.6

SPECfp_base2006 = 38.9

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Oct-2011
Hardware Availability: Oct-2011
Software Availability: Aug-2011

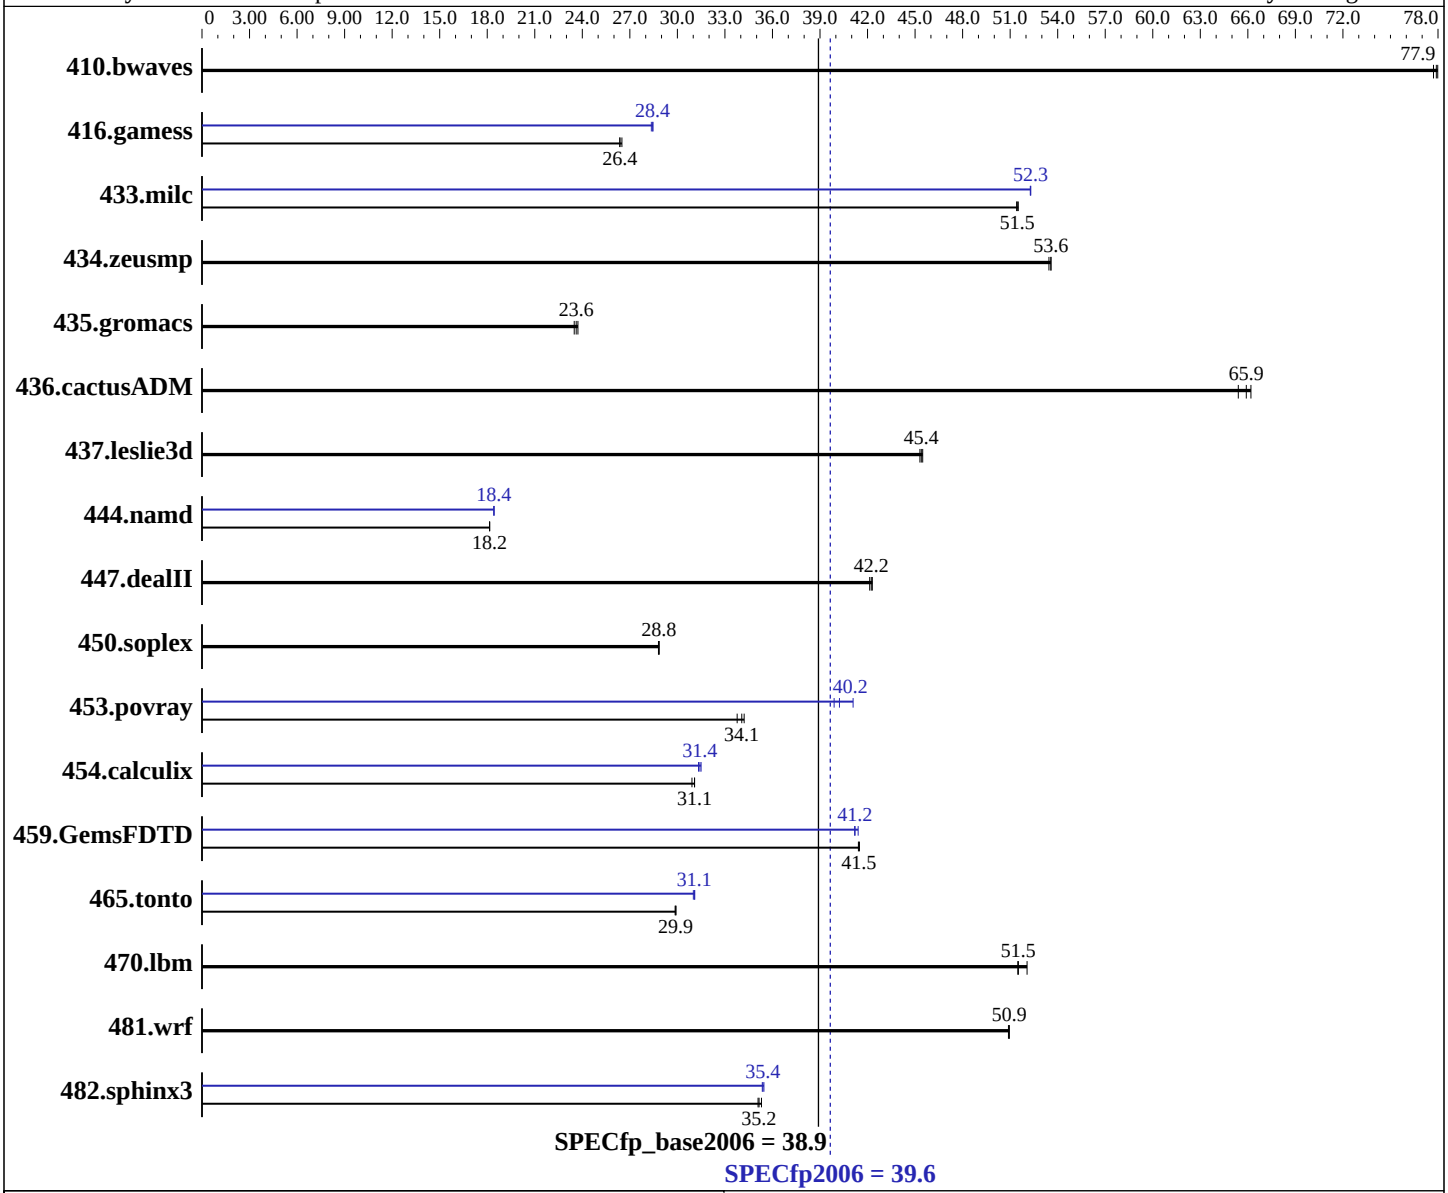

Hardware

CPU Name:	Intel Pentium G630
CPU Characteristics:	
CPU MHz:	2700
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server Release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
Compiler:	C/C++/Fortran: Version 12.1.0.225 of Intel Compiler XE Build 20110803
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3250 M4 (Intel Pentium G630)

SPECfp2006 = 39.6

SPECfp_base2006 = 38.9

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Oct-2011
Hardware Availability: Oct-2011
Software Availability: Aug-2011

L3 Cache: 3 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC, running at 1066 MHz)
Disk Subsystem: 1 x 146 GB SAS, 15000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	175	77.7	**174**	**77.9**	174	78.0	175	77.7	**174**	**77.9**	174	78.0
416.gamess	**742**	**26.4**	743	26.4	739	26.5	**689**	**28.4**	688	28.5	690	28.4
433.milc	178	51.5	179	51.4	**178**	**51.5**	176	52.3	**176**	**52.3**	176	52.3
434.zeusmp	170	53.6	170	53.4	**170**	**53.6**	170	53.6	170	53.4	**170**	**53.6**
435.gromacs	301	23.7	304	23.5	**302**	**23.6**	301	23.7	304	23.5	**302**	**23.6**
436.cactusADM	181	66.2	**181**	**65.9**	183	65.4	181	66.2	**181**	**65.9**	183	65.4
437.leslie3d	**207**	**45.4**	207	45.3	207	45.5	**207**	**45.4**	207	45.3	207	45.5
444.namd	**442**	**18.2**	442	18.1	442	18.2	435	18.4	435	18.4	**435**	**18.4**
447.dealII	270	42.3	272	42.1	**271**	**42.2**	270	42.3	272	42.1	**271**	**42.2**
450.soplex	289	28.8	**289**	**28.8**	290	28.8	289	28.8	**289**	**28.8**	290	28.8
453.povray	**156**	**34.1**	155	34.2	158	33.8	129	41.1	**132**	**40.2**	133	39.9
454.calculix	**265**	**31.1**	267	30.9	265	31.1	**263**	**31.4**	263	31.3	262	31.5
459.GemsFDTD	**256**	**41.5**	256	41.5	256	41.4	258	41.2	256	41.4	**257**	**41.2**
465.tonto	**329**	**29.9**	330	29.9	329	29.9	317	31.0	**317**	**31.1**	316	31.1
470.lbm	264	52.1	**267**	**51.5**	267	51.5	264	52.1	**267**	**51.5**	267	51.5
481.wrf	219	50.9	**219**	**50.9**	219	50.9	219	50.9	**219**	**50.9**	219	50.9
482.sphinx3	**554**	**35.2**	552	35.3	555	35.1	550	35.5	**551**	**35.4**	551	35.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```
BIOS Settings:
C-State enabled in BIOS
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/SPECcpu12.1/smartheap:/root/SPECcpu12.1/ic12.1-libs/ia32/:/root/SPECcpu12.1/ic12.1-libs/intel64"
OMP_NUM_THREADS = "2"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory
 using RHEL5.5 with binutils-2.17.50.0.6-14.el5
 Stack size set to unlimited using "ulimit -s unlimited"
```

Continued on next page

General Notes (Continued)

```
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
      444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
     450.soplex: -DSPEC_CPU_LP64
     453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
       465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
    482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-static -auto-ilp32 -ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel`

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

444.namd: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-fno-alias -auto-ilp32`

447.dealII: `basepeak = yes`

450.soplex: `basepeak = yes`

453.povray: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `basepeak = yes`

416.gamess: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll2 -inline-level=0 -scalar-rep- -static`

434.zeusmp: `basepeak = yes`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll2 -inline-level=0 -opt-prefetch -parallel`

465.tonto: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-inline-calloc -opt-malloc-options=3 -auto -unroll4`

Benchmarks using both Fortran and C:

435.gromacs: `basepeak = yes`

436.cactusADM: `basepeak = yes`

454.calculix: `-xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.html`
`http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revB.20111206.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.xml`
`http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revB.20111206.xml`

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3250 M4 (Intel Pentium G630)

SPECfp2006 = 39.6

SPECfp_base2006 = 38.9

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Oct-2011
Hardware Availability: Oct-2011
Software Availability: Aug-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:49:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 December 2011.