



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R715  
(AMD Opteron 6272, 2.10 GHz)

SPECint®\_rate2006 = 455

SPECint\_rate\_base2006 = 398

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

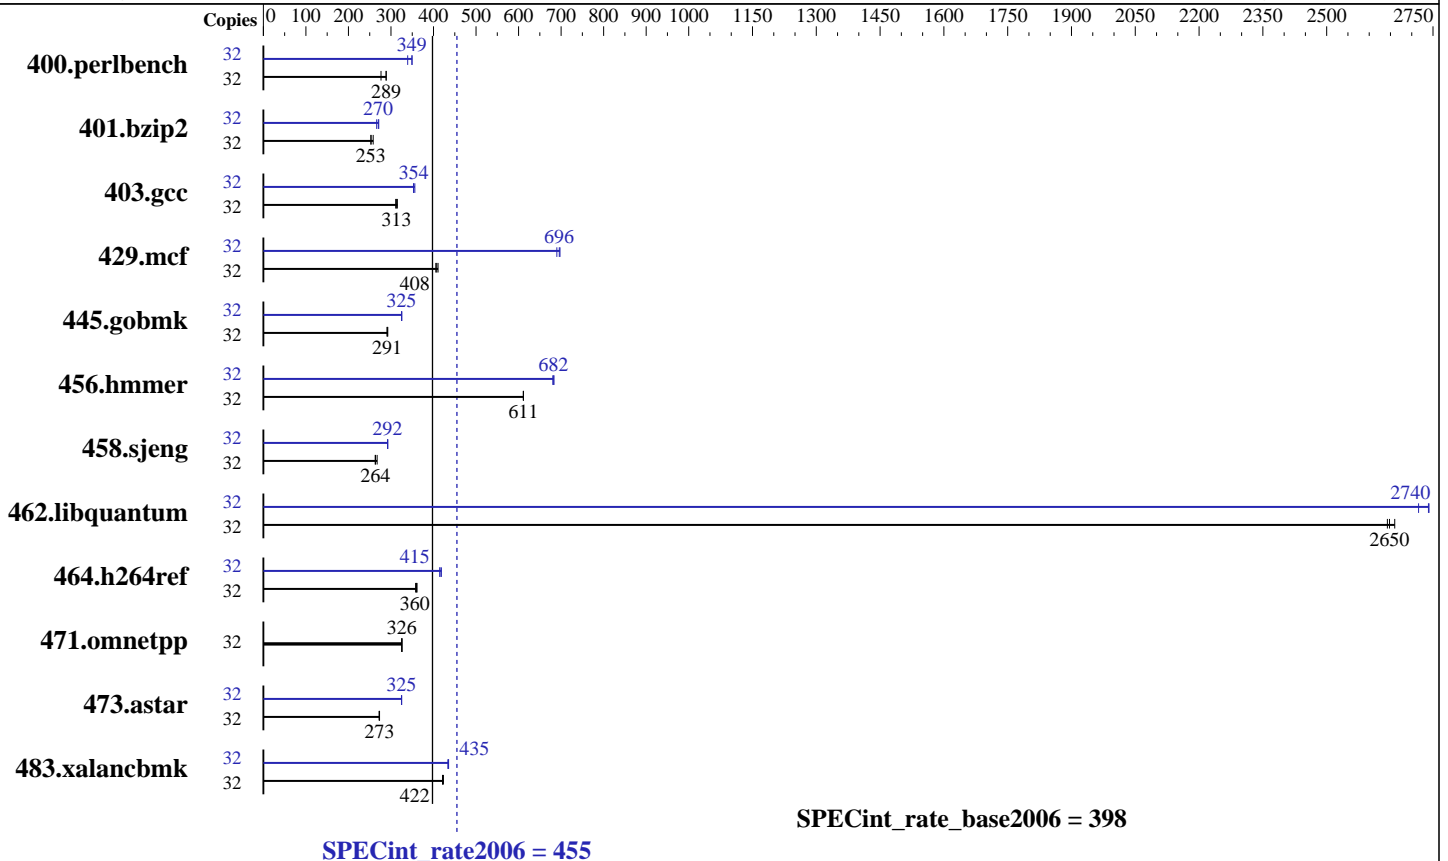

### Hardware

CPU Name: AMD Opteron 6272  
 CPU Characteristics: AMD Turbo CORE technology up to 3.00 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip  
 CPU(s) orderable: 2 chips  
 Primary Cache: 512 KB I on chip per chip,  
 64 KB I shared / 2 cores;  
 16 KB D on chip per core  
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 2 x 160 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1,  
 Kernel 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R715  
(AMD Opteron 6272, 2.10 GHz)

SPECint\_rate2006 = 455

SPECint\_rate\_base2006 = 398

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Nov-2011  
Hardware Availability: Nov-2011  
Software Availability: Jul-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	1130	277	<b>1084</b>	<b>289</b>	1083	289	32	894	350	921	339	<b>895</b>	<b>349</b>
401.bzip2	32	1221	253	<b>1221</b>	<b>253</b>	1196	258	32	1159	266	1138	271	<b>1143</b>	<b>270</b>
403.gcc	32	<b>824</b>	<b>313</b>	828	311	818	315	32	730	353	<b>729</b>	<b>354</b>	723	356
429.mcf	32	720	405	711	411	<b>716</b>	<b>408</b>	32	418	697	<b>420</b>	<b>696</b>	423	690
445.gobmk	32	1154	291	1148	292	<b>1153</b>	<b>291</b>	32	1034	325	1031	325	<b>1033</b>	<b>325</b>
456.hammer	32	488	611	<b>488</b>	<b>611</b>	488	611	32	437	683	439	680	<b>437</b>	<b>682</b>
458.sjeng	32	<b>1469</b>	<b>264</b>	1473	263	1448	267	32	<b>1325</b>	<b>292</b>	1325	292	1325	292
462.libquantum	32	<b>250</b>	<b>2650</b>	251	2640	249	2660	32	244	2720	<b>242</b>	<b>2740</b>	242	2740
464.h264ref	32	1960	361	1979	358	<b>1967</b>	<b>360</b>	32	1692	419	1707	415	<b>1706</b>	<b>415</b>
471.omnetpp	32	614	326	615	325	<b>614</b>	<b>326</b>	32	614	326	615	325	<b>614</b>	<b>326</b>
473.astar	32	823	273	826	272	<b>823</b>	<b>273</b>	32	691	325	692	325	<b>691</b>	<b>325</b>
483.xalancbmk	32	522	423	524	421	<b>524</b>	<b>422</b>	32	509	434	507	435	<b>507</b>	<b>435</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Binaries were compiled on a system with 2x AMD Opteron 6276 chips + 128GB Memory using RHEL 6.1  
Huge pages, transparent Huge pages, and space randomization is controlled with the following settings:  
echo 57344 > /proc/sys/vm/nr\_hugepages  
mount -t hugetlbfs nodev /mnt/hugepages  
echo never > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
echo 0 > /proc/sys/kernel/randomize\_va\_space=0

## Platform Notes

'Power Management' set to 'Maximum Performance' in BIOS

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "896"  
LD\_LIBRARY\_PATH = "/root/cpu2006-1.1/amd1104-rate-libs-revA/32:/root/cpu2006-1.1/amd1104-rate-libs-revA/64"  
The x86 Open64 Compiler Suite is only available from (and supported by) AMD at

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R715  
(AMD Opteron 6272, 2.10 GHz)

**SPECint\_rate2006 = 455**

**SPECint\_rate\_base2006 = 398**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Nov-2011  
**Hardware Availability:** Nov-2011  
**Software Availability:** Jul-2011

## General Notes (Continued)

<http://developer.amd.com/cpu/open64>

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=bdver1 -Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=on  
-IPA:plimit=8000 -IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso  
-LNO:prefetch=2

C++ benchmarks:  
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peek=on  
-D\_\_OPEN64\_FAST\_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R715  
(AMD Opteron 6272, 2.10 GHz)

**SPECint\_rate2006 = 455**

**SPECint\_rate\_base2006 = 398**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Nov-2011  
**Hardware Availability:** Nov-2011  
**Software Availability:** Jul-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0  
-IPA:plimit=20000 -OPT:unroll\_times\_max=8  
-OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:local\_sched\_alg=1  
-CG:unroll\_fb\_req=on -CG:movext\_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0  
-OPT:alias=disjoint -OPT:goto=off -CG:local\_sched\_alg=1  
-HP:bd=2m:heap=2m

403.gcc: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:trip\_count=256  
-CG:cmp\_peep=on -CG:pre\_minreg\_level=2 -m32  
-HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200  
-WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll\_times\_max=5 -ipa  
-INLINE:aggressive=on -CG:gcm=off  
-GRA:prioritize\_by\_density=on -m32 -HP:bd=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=8 -OPT:keep\_ext=on -IPA:plimit=750  
-IPA:min\_hotness=300 -IPA:pu\_reorder=1  
-LNO:ignore\_feedback=off -WOPT:if\_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2  
-OPT:alias=disjoint -OPT:unroll\_times\_max=16  
-OPT:unroll\_size=512 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
-CG:cflow=0 -CG:cmp\_peep=on -CG:pre\_local\_sched=off  
-HP:bd=2m:heap=2m

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R715  
(AMD Opteron 6272, 2.10 GHz)

**SPECint\_rate2006 = 455**

**SPECint\_rate\_base2006 = 398**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Nov-2011  
**Hardware Availability:** Nov-2011  
**Software Availability:** Jul-2011

## Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -CG:ptr\_load\_use=0  
-CG:divrem\_opt=on -CG:movext\_icmp=off -CG:locs\_best=on  
-LNO:full\_unroll=10 -IPA:pu\_reorder=2 -HP:bd=2m:heap=2m  
-WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -mso -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=16 -LNO:prefetch=2  
-LNO:prefetch\_ahead=4 -LNO:pf2=0 -CG:local\_sched\_alg=1  
-INLINE:aggressive=on -IPA:plimit=15000 -IPA:small\_pu=100  
-HP:bd=2m:heap=2m,limit=300

464.h264ref: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -IPA:plimit=20000  
-OPT:alias=disjoint -CG:ptr\_load\_use=0  
-CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on  
-GRA:optimize\_boundary=on -OPT:alias=disjoint  
-INLINE:aggressive=on -IPA:small\_pu=3000 -IPA:plimit=3000  
-m32 -HP:bd=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET  
-INLINE:aggressive=on -m32 -CG:cmp\_peep=on  
-CG:local\_sched=off -GRA:unspill=on -TENV:frame\_pointer=off  
-fno-emit-exceptions  
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.20111122.html>  
<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.20111122.xml>  
<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R715  
(AMD Opteron 6272, 2.10 GHz)

**SPECint\_rate2006 = 455**

**SPECint\_rate\_base2006 = 398**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Nov-2011

**Hardware Availability:** Nov-2011

**Software Availability:** Jul-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Thu Jul 24 01:11:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 December 2011.