SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS924A-E6 (KGPX-Q32) Server System
(AMD Opteron 6282 SE, 2.60 GHz)

SPECint®_rate2006 = 1060

SPECint_rate_base2006 = 923

CPU2006 license: 9016
Test sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test date: Oct-2011
Hardware Availability: Nov-2011
Software Availability: Jul-2011

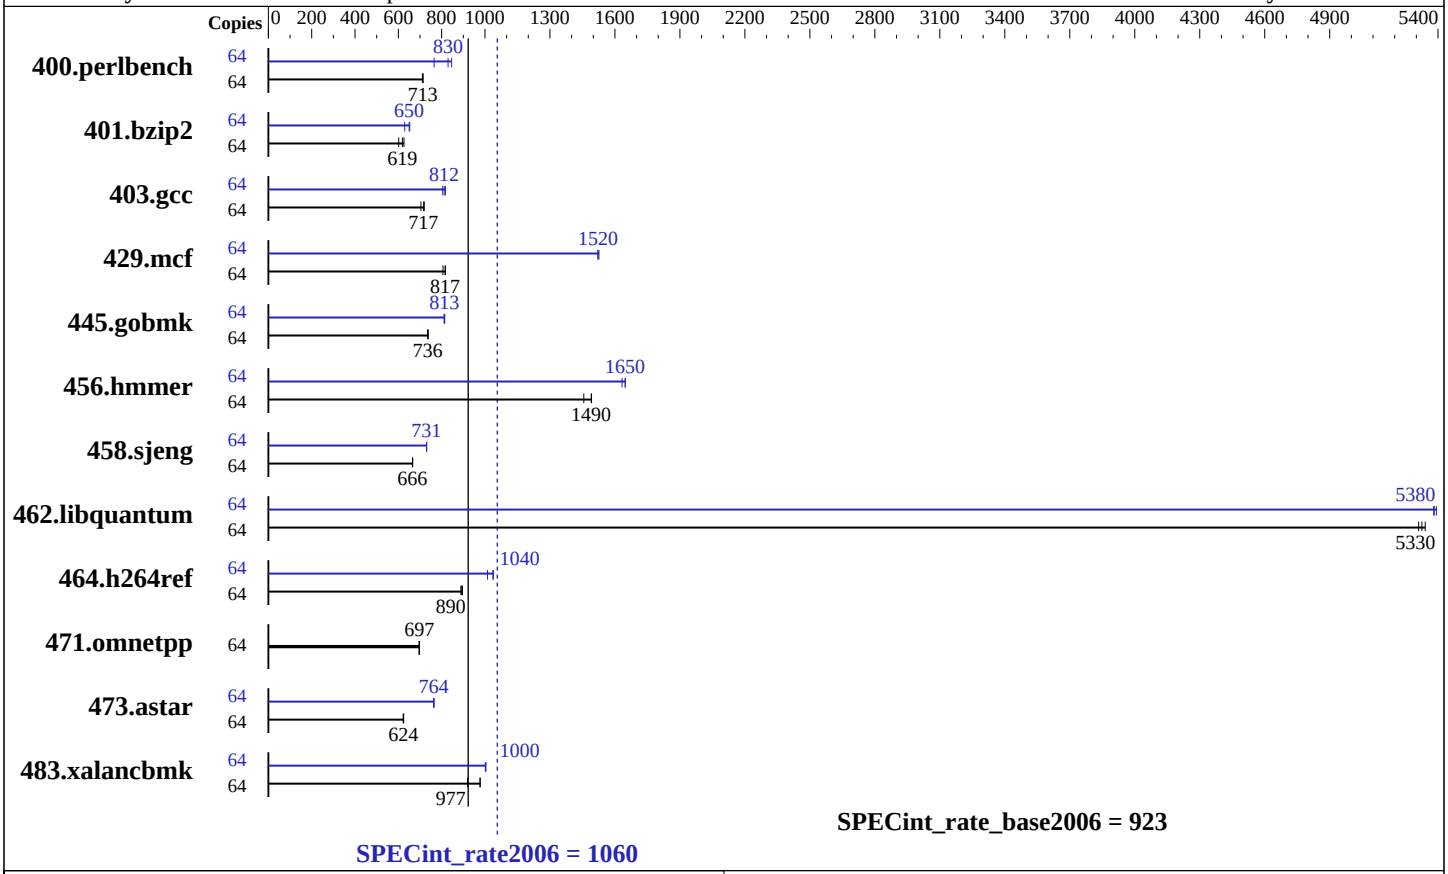

Hardware

CPU Name:	AMD Opteron 6282 SE
CPU Characteristics:	AMD Turbo CORE technology up to 3.30 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	64 cores, 4 chips, 16 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	512 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache:	16 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	16 MB I+D on chip per chip, 8 MB shared / 8 cores
Other Cache:	None
Memory:	256 GB (32 x 8 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	Seagate ST3500320AS 1 x 500 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
Compiler:	C/C++: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 10.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS924A-E6 (KGPX-Q32) Server System
(AMD Opteron 6282 SE, 2.60 GHz)

SPECint_rate2006 = 1060

SPECint_rate_base2006 = 923

CPU2006 license: 9016
Test sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test date: Oct-2011
Hardware Availability: Nov-2011
Software Availability: Jul-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	879	711	876	714	**876**	**713**	64	817	765	**754**	**830**	739	846
401.bzip2	64	1026	602	**998**	**619**	987	626	64	981	629	946	653	**950**	**650**
403.gcc	64	**719**	**717**	716	720	731	704	64	630	817	**635**	**812**	640	805
429.mcf	64	715	817	**715**	**817**	724	806	64	**383**	**1520**	384	1520	382	1530
445.gobmk	64	910	738	**912**	**736**	913	736	64	824	814	**826**	**813**	828	811
456.hmmer	64	410	1460	**401**	**1490**	400	1490	64	366	1630	362	1650	**362**	**1650**
458.sjeng	64	1162	666	1164	665	**1163**	**666**	64	1060	731	**1060**	**731**	1061	730
462.libquantum	64	**249**	**5330**	248	5340	250	5310	64	246	5380	**246**	**5380**	246	5390
464.h264ref	64	**1591**	**890**	1580	896	1592	890	64	**1366**	**1040**	1364	1040	1400	1010
471.omnetpp	64	**574**	**697**	575	696	573	698	64	**574**	**697**	575	696	573	698
473.astar	64	722	622	**720**	**624**	719	624	64	**588**	**764**	588	764	588	764
483.xalancbmk	64	480	920	**452**	**977**	452	978	64	440	1000	**441**	**1000**	441	1000

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot paramenter in /boot/grub/menu.lst
Set kernel/randomize_va_space=0 in /etc/sysctl.conf

Set vm/nr_hugepages=57344 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/cpu2006/amd1104-rate-libs-revA/32:/cpu2006/amd1104-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Binaries were compiled on a system with 2x AMD Opteron 6276 chips + 128GB Memory using RHEL 6.1
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -CG:local_sched_alg=1 -INLINE:aggressive=on
-IPA:plimit=8000 -IPA:small_pu=100 -HP:bd=2m:heap=2m -mso
-LNO:prefetch=2

C++ benchmarks:
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-D__OPEN64_FAST_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
-IPA:plimit=20000 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
-CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
-OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
-INLINE:aggressive=on -CG:gcm=off
-GRA:prioritize_by_density=on -m32 -HP:bdt=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
-OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1
-LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
-OPT:alias=disjoint -OPT:unroll_times_max=16
-OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
-CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
-HP:bdt=2m:heap=2m

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:ptr_load_use=0
-CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on
-LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:bd=2m:heap=2m
-WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -mso -OPT:unroll_size=512
-OPT:unroll_times_max=16 -LNO:prefetch=2
-LNO:prefetch_ahead=4 -LNO:pf2=0 -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=15000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m,limit=300

464.h264ref: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -IPA:plimit=20000
-OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-GRA:optimize_boundary=on -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:small_pu=3000 -IPA:plimit=3000
-m32 -HP:bdt=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html
http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml
http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS924A-E6 (KGPX-Q32) Server System
(AMD Opteron 6282 SE, 2.60 GHz)

SPECint_rate2006 = 1060

SPECint_rate_base2006 = 923

CPU2006 license: 9016
Test sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test date: Oct-2011
Hardware Availability: Nov-2011
Software Availability: Jul-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:46:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 December 2011.