SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R415
(AMD Opteron 4284, 3.00 GHz)

SPECfp®_rate2006 = 210

SPECfp_rate_base2006 = 194

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2011
Hardware Availability: Dec-2011
Software Availability: Jul-2011

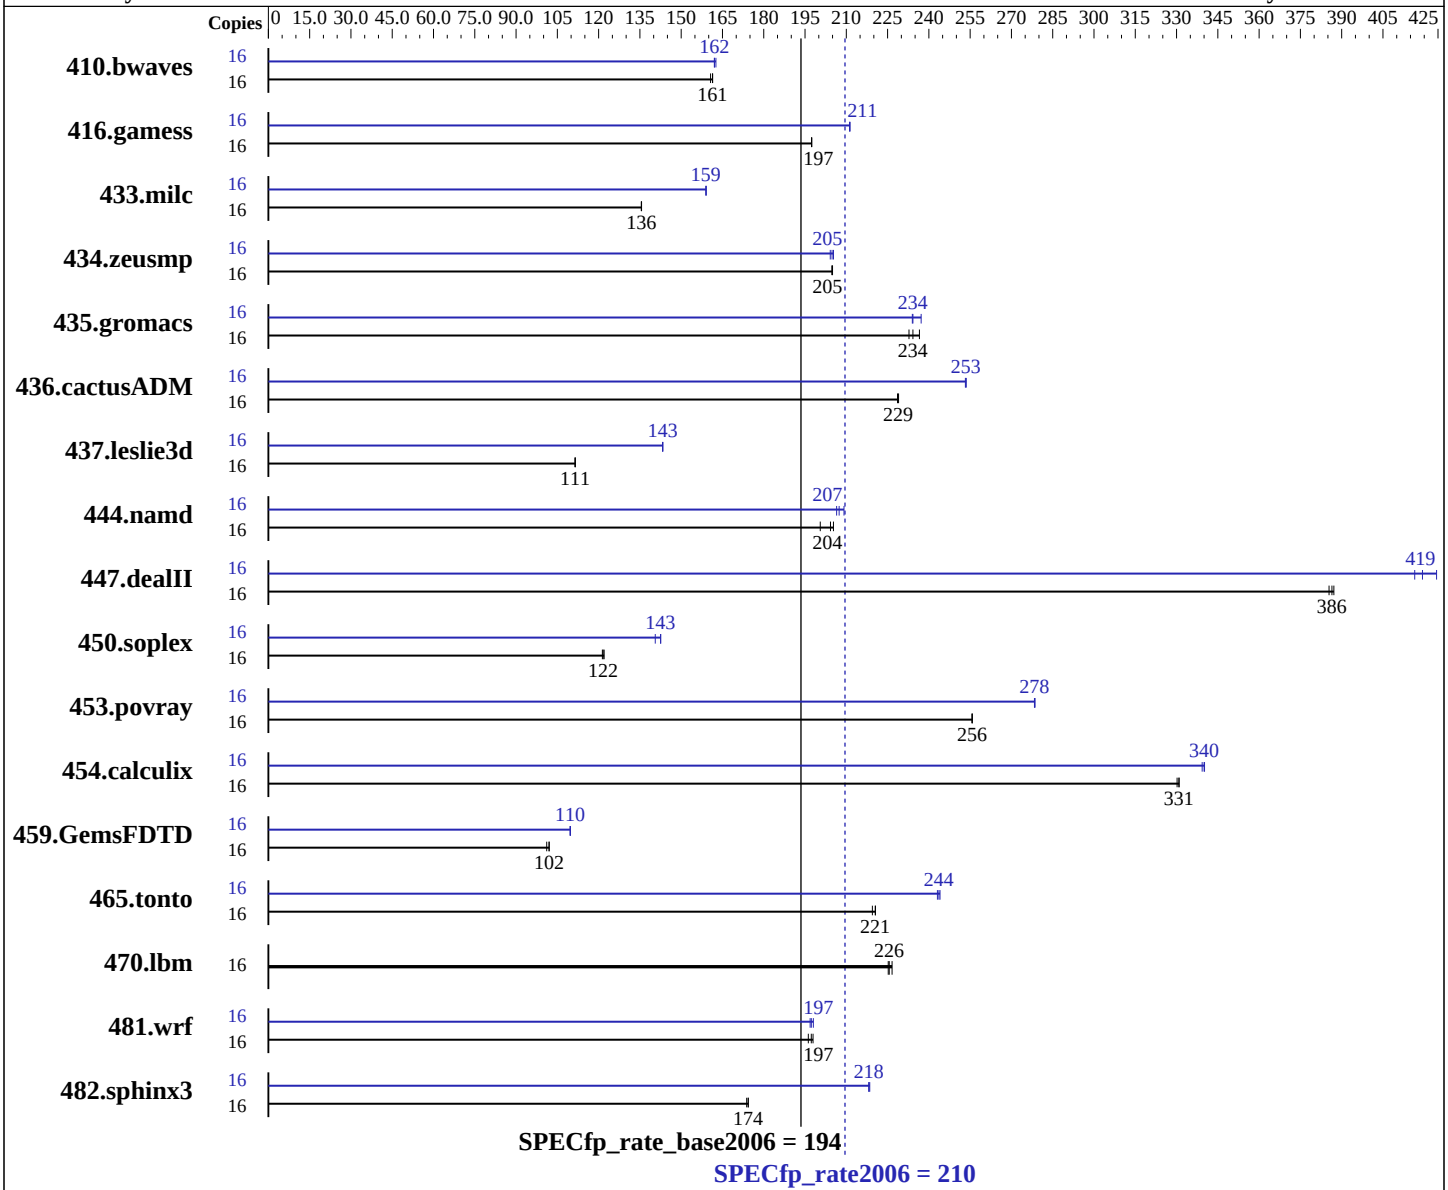

Hardware

CPU Name:	AMD Opteron 4284
CPU Characteristics:	AMD Turbo CORE technology up to 3.70 GHz
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip
CPU(s) orderable:	1,2 chips

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
Compiler:	C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R415
(AMD Opteron 4284, 3.00 GHz)

SPECfp_rate2006 = 210

SPECfp_rate_base2006 = 194

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2011
Hardware Availability: Dec-2011
Software Availability: Jul-2011

Primary Cache: 256 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache: 8 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 2 x 73 GB SAS, 15000 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	**1347**	**161**	1347	161	1353	161	16	1342	162	1337	163	**1342**	**162**
416.gamess	16	1587	197	1587	197	**1587**	**197**	16	**1483**	**211**	1483	211	1483	211
433.milc	16	1083	136	**1084**	**136**	1084	136	16	**924**	**159**	924	159	923	159
434.zeusmp	16	**711**	**205**	711	205	710	205	16	713	204	**711**	**205**	709	205
435.gromacs	16	**488**	**234**	483	237	491	233	16	482	237	488	234	**488**	**234**
436.cactusADM	16	836	229	835	229	**836**	**229**	16	**754**	**253**	754	254	755	253
437.leslie3d	16	**1349**	**111**	1350	111	1349	112	16	1049	143	1050	143	**1050**	**143**
444.namd	16	625	205	**628**	**204**	640	201	16	614	209	621	206	**619**	**207**
447.dealII	16	473	387	**474**	**386**	475	385	16	439	417	**436**	**419**	431	424
450.soplex	16	1100	121	**1097**	**122**	1094	122	16	949	141	**936**	**143**	936	143
453.povray	16	**333**	**256**	333	256	333	256	16	**306**	**278**	306	278	306	279
454.calculix	16	399	331	**399**	**331**	400	330	16	388	340	**388**	**340**	389	339
459.GemsFDTD	16	1664	102	1679	101	**1665**	**102**	16	**1547**	**110**	1547	110	1548	110
465.tonto	16	717	219	**714**	**221**	714	221	16	**646**	**244**	648	243	645	244
470.lbm	16	970	227	**974**	**226**	976	225	16	970	227	**974**	**226**	976	225
481.wrf	16	903	198	**906**	**197**	911	196	16	**906**	**197**	903	198	908	197
482.sphinx3	16	**1789**	**174**	1794	174	1788	174	16	**1429**	**218**	1429	218	1427	219

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit
Large pages were not enabled for this run
Binaries were compiled on a system with 2x AMD Opteron 6276 chips + 128GB Memory using RHEL 6.1
```

Continued on next page

Operating System Notes (Continued)

```
Set kernel/randomize_va_space=0 in /etc/sysctl.conf
```

Platform Notes

```
'Power Management' set to 'Maximum Performance' in BIOS
```

General Notes

```
environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd1104-rate-libs-revA/32:/root/cpu2006-1.1/amd1104-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
```

Base Compiler Invocation

C benchmarks:
`opencc`

C++ benchmarks:
`openCC`

Fortran benchmarks:
`openf95`

Benchmarks using both Fortran and C:
`opencc openf95`

Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64`
436.cactusADM: `-DSPEC_CPU_LP64 -fno-second-underscore`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
450.soplex: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`

Continued on next page

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64 -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso

C++ benchmarks:
-march=bdver1 -Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET

Fortran benchmarks:
-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2 -OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso

Benchmarks using both Fortran and C:
-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso -LNO:blocking=off -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: basepeak = yes

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:local_sched_alg=2 -INLINE:aggressive=on
-LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso

C++ benchmarks:

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
-INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
-fno-emit-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
-TENV:frame_pointer=off

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -m32
-HP:bdt=2m:heap=2m -WOPT:sib=on

Continued on next page

Peak Optimization Flags (Continued)

453.povray: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:ignore_feedback=off -LNO:fu=4
-LNO:loop_model_simd=on -LNO:simd_rm_unity_remainder=on
-WOPT:aggstr=0 -HP:bdt=2m:heap=2m -CG:cmp_peep=on

416.gamess: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off
-HP:bdt=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre_minreg_level=2 -LNO:simd=0
-LNO:fusion=2 -HP:bdt=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll_size=0 -LNO:fission=2
-CG:load_exe=0 -CG:local_sched_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-HP:bdt=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off
-LNO:prefetch=2 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0
-WOPT:sib=on

454.calculix: -march=bdver1 -Ofast -OPT:unroll_size=256
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on
-CG:load_exe=1 -HP -WOPT:sib=on

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.20111122.html
http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.20111122.xml
http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:38:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 December 2011.