



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6234

SPECfp®2006 = 42.7

SPECfp_base2006 = 35.1

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Jul-2011

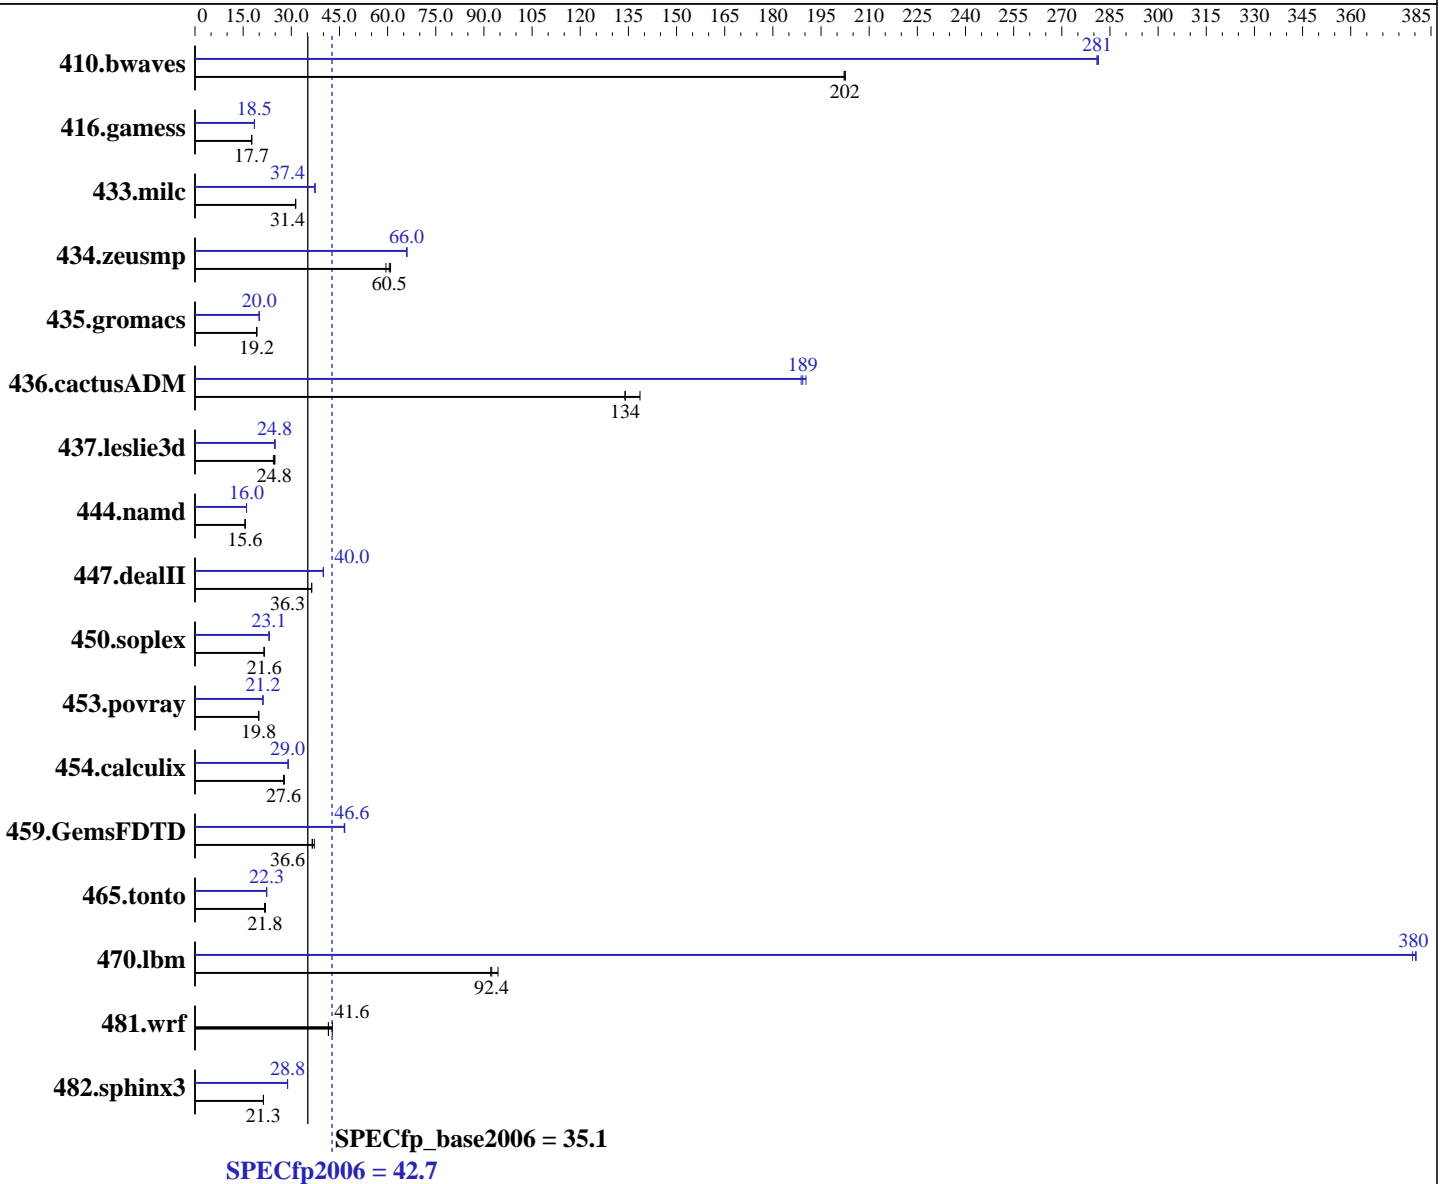

Hardware

CPU Name: AMD Opteron 6234
 CPU Characteristics: AMD Turbo CORE technology up to 3.00 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chips

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6234

SPECfp2006 = 42.7

SPECfp_base2006 = 35.1

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Primary Cache: 384 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores
Other Cache: None
Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	67.2	202	<u>67.1</u>	<u>202</u>	67.1	203	48.4	281	48.3	281	<u>48.4</u>	<u>281</u>
416.gamess	1109	17.7	1110	17.6	<u>1109</u>	<u>17.7</u>	1057	18.5	<u>1057</u>	<u>18.5</u>	1057	18.5
433.milc	293	31.3	293	31.4	<u>293</u>	<u>31.4</u>	245	37.4	<u>246</u>	<u>37.4</u>	246	37.3
434.zeusmp	<u>150</u>	<u>60.5</u>	149	60.9	153	59.5	<u>138</u>	<u>66.0</u>	138	66.0	138	65.9
435.gromacs	372	19.2	370	19.3	<u>372</u>	<u>19.2</u>	<u>357</u>	<u>20.0</u>	357	20.0	357	20.0
436.cactusADM	89.2	134	86.2	139	<u>89.2</u>	<u>134</u>	62.8	190	63.3	189	<u>63.1</u>	<u>189</u>
437.leslie3d	377	24.9	385	24.4	<u>380</u>	<u>24.8</u>	376	25.0	<u>378</u>	<u>24.8</u>	379	24.8
444.namd	513	15.6	513	15.6	<u>513</u>	<u>15.6</u>	<u>500</u>	<u>16.0</u>	500	16.0	500	16.0
447.dealII	315	36.3	<u>315</u>	<u>36.3</u>	315	36.3	<u>286</u>	<u>40.0</u>	286	40.0	286	40.0
450.soplex	388	21.5	<u>387</u>	<u>21.6</u>	387	21.6	362	23.1	<u>361</u>	<u>23.1</u>	361	23.1
453.povray	268	19.8	268	19.9	<u>268</u>	<u>19.8</u>	251	21.2	251	21.2	<u>251</u>	<u>21.2</u>
454.calculix	299	27.6	<u>299</u>	<u>27.6</u>	296	27.8	<u>284</u>	<u>29.0</u>	284	29.0	284	29.0
459.GemsFDTD	291	36.5	285	37.2	<u>290</u>	<u>36.6</u>	228	46.6	228	46.5	<u>228</u>	<u>46.6</u>
465.tonto	448	21.9	<u>451</u>	<u>21.8</u>	454	21.7	441	22.3	441	22.3	<u>441</u>	<u>22.3</u>
470.lbm	<u>149</u>	<u>92.4</u>	146	94.4	149	92.1	36.1	380	<u>36.1</u>	<u>380</u>	36.2	379
481.wrf	269	41.5	<u>269</u>	<u>41.6</u>	261	42.8	269	41.5	<u>269</u>	<u>41.6</u>	261	42.8
482.sphinx3	915	21.3	914	21.3	<u>914</u>	<u>21.3</u>	<u>676</u>	<u>28.8</u>	676	28.8	676	28.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6234

SPECfp2006 = 42.7

SPECfp_base2006 = 35.1

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Operating System Notes (Continued)

Set kernel/randomize_va_space=0 in /etc/sysctl.conf
cpuspeed stop was used to set the CPU frequency to its maximum.

Set vm/nr_hugepages=4000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/work/cpu2006v1.2/amd1104-speed-libs-revA/32:/root/work/cpu2006v1.2/amd1104-speed-libs-revA/64"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23"
O64_OMP_SPIN_COUNT = "800000"
O64_OMP_SPIN_USER_LOCK = "true"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6220 chips + 64GB Memory using RHEL 6.1

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6234

SPECfp2006 = 42.7

SPECfp_base2006 = 35.1

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Base Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
 -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -HP:bdt=2m:heap=2m -apo -mso
 -OPT:alias=restricted -OPT:malloc_alg=2 -LNO:parallel_overhead=10000

C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load_exe=0 -CG:p2align=0
 -INLINE:aggressive=on -HP:bdt=2m:heap=2m -D__OPEN64_FAST_SET

Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -LNO:fusion_peeling_limit=0
 -LNO:parallel_overhead=10000 -OPT:rsqrt=2 -OPT:unroll_size=256
 -HP:bdt=2m:heap=2m -apo

Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -HP:bdt=2m:heap=2m -apo -mso
 -OPT:alias=restricted -OPT:malloc_alg=2 -LNO:parallel_overhead=10000
 -LNO:blocking=off -LNO:fusion_peeling_limit=0 -OPT:rsqrt=2
 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6234

SPECfp2006 = 42.7

SPECfp_base2006 = 35.1

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive

470.lbm: -march=bdver1 -Ofast -mso -apo -CG:sse_cse_regs=0
-LNO:prefetch_ahead=4 -CG:locs_shallow_depth=1
-CG:cmp_peep=on -CG:compute_to=on -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-OPT:alias=restricted -m3dnow -IPA:inline=off

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:local_sched_alg=2 -CG:use_incdec=off
-INLINE:aggressive=on -WOPT:sib=on -HP

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m

447.deallI: -march=bdver1 -Ofast -LNO:simd=0 -D__OPEN64_FAST_SET
-static -INLINE:aggressive=on -OPT:alias=disjoint
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6234

SPECfp2006 = 42.7

SPECfp_base2006 = 35.1

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -HP:bdt=2m:heap=2m -WOPT:sib=on

453.povray: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
-INLINE:aggressive=on -HP:bdt=2m:heap=2m -OPT:transform=2
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -apo -OPT:Ofast
-OPT:treeheight=on -LNO:blocking=off -LNO:prefetch=2
-LNO:pf2=0 -LNO:prefetch_ahead=3 -LNO:ignore_feedback=off
-LNO:fu=4 -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -CG:cmp_peep=on -CG:p2align=0

416.gamess: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -apo -LNO:blocking=off
-LNO:interchange=off -LNO:fusion_peeling_limit=0
-OPT:treeheight=on -OPT:unroll_size=256 -CG:cmp_peep=on
-CG:compute_to=on -GRA:prioritize_by_density=on
-HP:bdt=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -LNO:prefetch=2 -LNO:blocking=off
-CG:interior_ptrs=on -OPT:unroll_size=256
-GRA:prioritize_by_density=on -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll_size=0 -LNO:fission=2
-CG:load_exe=0 -CG:local_sched_alg=2 -HP -apo

465.tonto: -march=bdver1 -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -CG:local_sched_alg=1
-IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6234

SPECfp2006 = 42.7

SPECfp_base2006 = 35.1

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

```
436.cactusADM: -march=bdver1 -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off
               -LNO:prefetch=2 -HP:bdt=2m:heap=2m -CG:locs_shallow_depth=1
               -CG:load_exe=0 -WOPT:sib=on -apo
```

```
454.calculix: -march=bdver1 -Ofast -OPT:unroll_size=256
              -GRA:optimize_boundary=on -HP:bdt=2m:heap=2m
```

```
481.wrf: basepeak = yes
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 02:00:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 February 2012.