



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 M3
(AMD Opteron 6274)

SPECint_rate2006 = 923

SPECint_rate_base2006 = 807

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2012

Hardware Availability: Dec-2011

Software Availability: Jul-2011

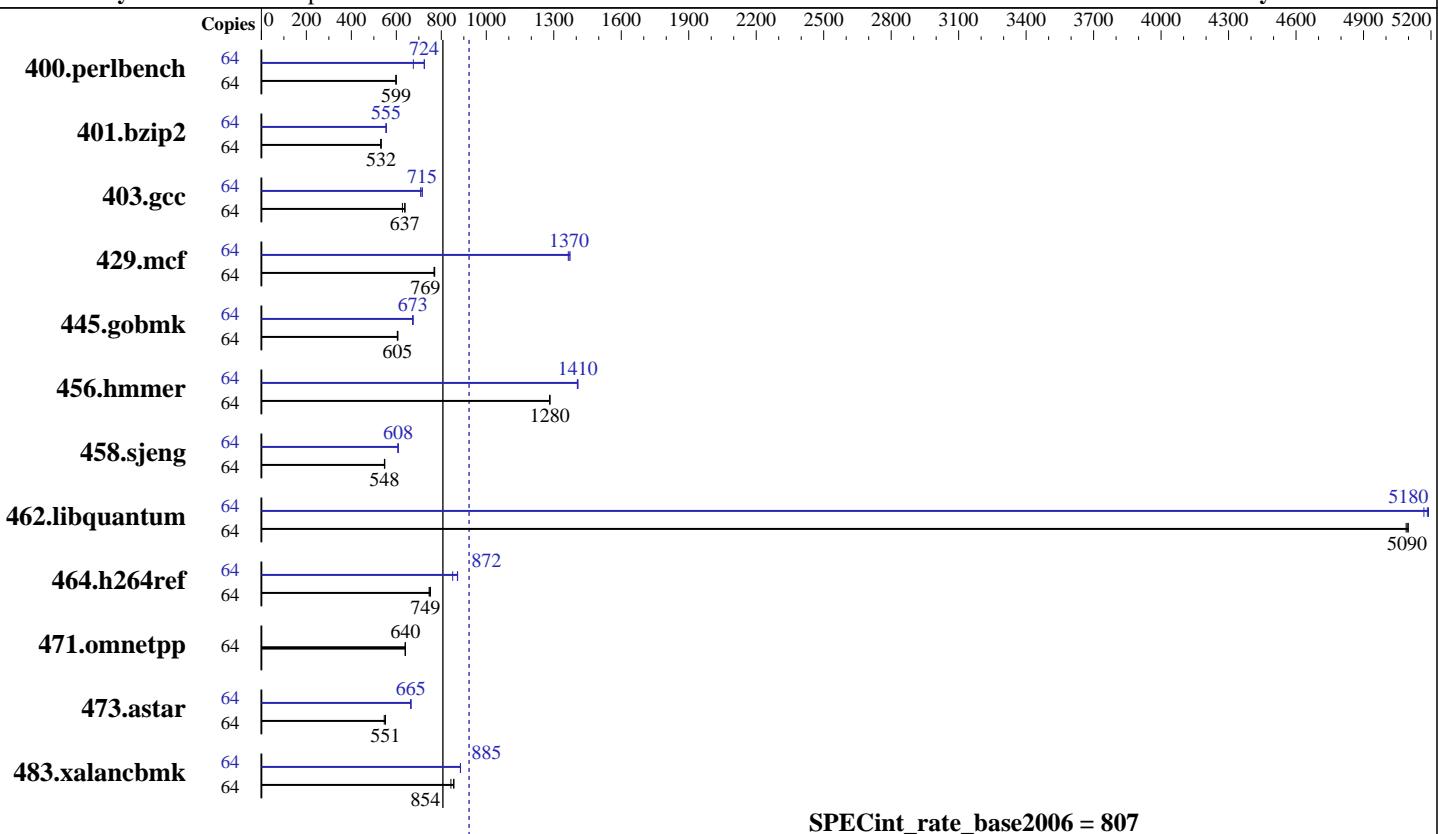

SPECint_rate_base2006 = 807

SPECint_rate2006 = 923

Hardware

CPU Name: AMD Opteron 6274
CPU Characteristics: AMD Turbo CORE technology up to 3.10 GHz
CPU MHz: 2200
FPU: Integrated
CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip
CPU(s) orderable: 2,4 chips
Primary Cache: 512 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core
Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores
Other Cache: None
Memory: 256 GB (32 x 8 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 600 GB SATA, 15000 RPM
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.1,
Kernel 2.6.32-131.0.15.el6.x86_64
Compiler: C/C++: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel: No
File System: ext3
System State: Run level 3 (Full multiuser with network)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 M3
(AMD Opteron 6274)

SPECint_rate2006 = 923

SPECint_rate_base2006 = 807

CPU2006 license: 11

Test date: Feb-2012

Test sponsor: IBM Corporation

Hardware Availability: Dec-2011

Tested by: IBM Corporation

Software Availability: Jul-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1045	599	1044	599	1044	599	64	926	676	863	724	863	724
401.bzip2	64	1161	532	1164	531	1159	533	64	1113	555	1114	554	1112	555
403.gcc	64	822	627	806	639	809	637	64	720	715	721	715	728	708
429.mcf	64	759	769	760	768	757	771	64	428	1360	427	1370	425	1370
445.gobmk	64	1106	607	1110	605	1110	605	64	995	675	997	673	998	672
456.hmmer	64	466	1280	466	1280	466	1280	64	425	1410	424	1410	425	1400
458.sjeng	64	1416	547	1414	548	1412	549	64	1273	608	1274	608	1275	608
462.libquantum	64	261	5090	260	5090	260	5100	64	256	5190	256	5180	257	5170
464.h264ref	64	1884	752	1899	746	1891	749	64	1623	872	1665	851	1625	872
471.omnetpp	64	625	640	625	640	625	640	64	625	640	625	640	625	640
473.astar	64	822	546	815	552	815	551	64	676	665	676	665	676	664
483.xalancbmk	64	524	843	516	856	517	854	64	499	885	499	885	499	885

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Set kernel/randomize_va_space=0 in /etc/sysctl.conf

Set vm/nr_hugepages=57344 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Platform Notes

BIOS settings:
Operating Mode set to Performance Mode

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/root/speccpu-rate-rev1104B1/amd1104-rate-libs-revB/32:/root/speccpu-rate-rev1104B1/amd1104-rate-libs-revB/64"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 M3
(AMD Opteron 6274)

SPECint_rate2006 = 923

SPECint_rate_base2006 = 807

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2012

Hardware Availability: Dec-2011

Software Availability: Jul-2011

General Notes (Continued)

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6282SE chips + 64GB Memory using RHEL 6.1

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -CG:local_sched_alg=1 -INLINE:aggressive=on
-IPA:plimit=8000 -IPA:small_pu=100 -HP:bd=2m:heap=2m -mso
-LNO:prefetch=2

C++ benchmarks:
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-D__OPEN64_FAST_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 M3
(AMD Opteron 6274)

SPECint_rate2006 = 923

SPECint_rate_base2006 = 807

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2012

Hardware Availability: Dec-2011

Software Availability: Jul-2011

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
  -IPA:plimit=20000 -OPT:unroll_times_max=8
  -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
  -WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
  -CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
  -OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
  -HP:bdt=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
  -CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
  -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
  -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
  -INLINE:aggressive=on -CG:gcm=off
  -GRA:prioritize_by_density=on -m32 -HP:bdt=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
  -OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
  -IPA:min_hotness=300 -IPA:pu_reorder=1
  -LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
  -OPT:alias=disjoint -OPT:unroll_times_max=16
  -OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
  -CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
  -HP:bdt=2m:heap=2m
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 M3
(AMD Opteron 6274)

SPECint_rate2006 = 923

SPECint_rate_base2006 = 807

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2012

Hardware Availability: Dec-2011

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

```
458.sjeng: -march=bdver1 -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -Ofast -CG:ptr_load_use=0
           -CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on
           -LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:bd=2m:heap=2m
           -WOPT:sib=on
```

```
462.libquantum: -march=bdver1 -Ofast -mso -OPT:unroll_size=512
                -OPT:unroll_times_max=16 -LNO:prefetch=2
                -LNO:prefetch_ahead=4 -LNO:pf2=0 -CG:local_sched_alg=1
                -INLINE:aggressive=on -IPA:plimit=15000 -IPA:small_pu=100
                -HP:bdt=2m:heap=2m,limit=300
```

```
464.h264ref: -march=bdver1 -fb_create fbdata(pass 1)
              -fb_opt fbdata(pass 2) -O3 -OPT:unroll_size=256
              -OPT:unroll_times_max=2 -IPA:plimit=20000
              -OPT:alias=disjoint -CG:ptr_load_use=0
              -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
```

C++ benchmarks:

```
471.omnetpp: basepeak = yes
```

```
473.astar: -march=bdver1 -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
            -WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
            -GRA:optimize_boundary=on -OPT:alias=disjoint
            -INLINE:aggressive=on -IPA:small_pu=3000 -IPA:plimit=3000
            -m32 -HP:bdt=2m:heap=2m
```

```
483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
                 -OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
                 -INLINE:aggressive=on -m32 -CG:cmp_peep=on
                 -CG:local_sched=off -GRA:unspill=on -TENV:frame_pointer=off
                 -fno-emit-exceptions
                 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.html>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.xml>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 M3
(AMD Opteron 6274)

SPECint_rate2006 = 923

SPECint_rate_base2006 = 807

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2012

Hardware Availability: Dec-2011

Software Availability: Jul-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Sep 22 18:39:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 March 2012.