SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 M3
(AMD Opteron 6274)

SPECfp®_rate2006 = 700

SPECfp_rate_base2006 = 650

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Feb-2012
Hardware Availability: Dec-2011
Software Availability: Jul-2011

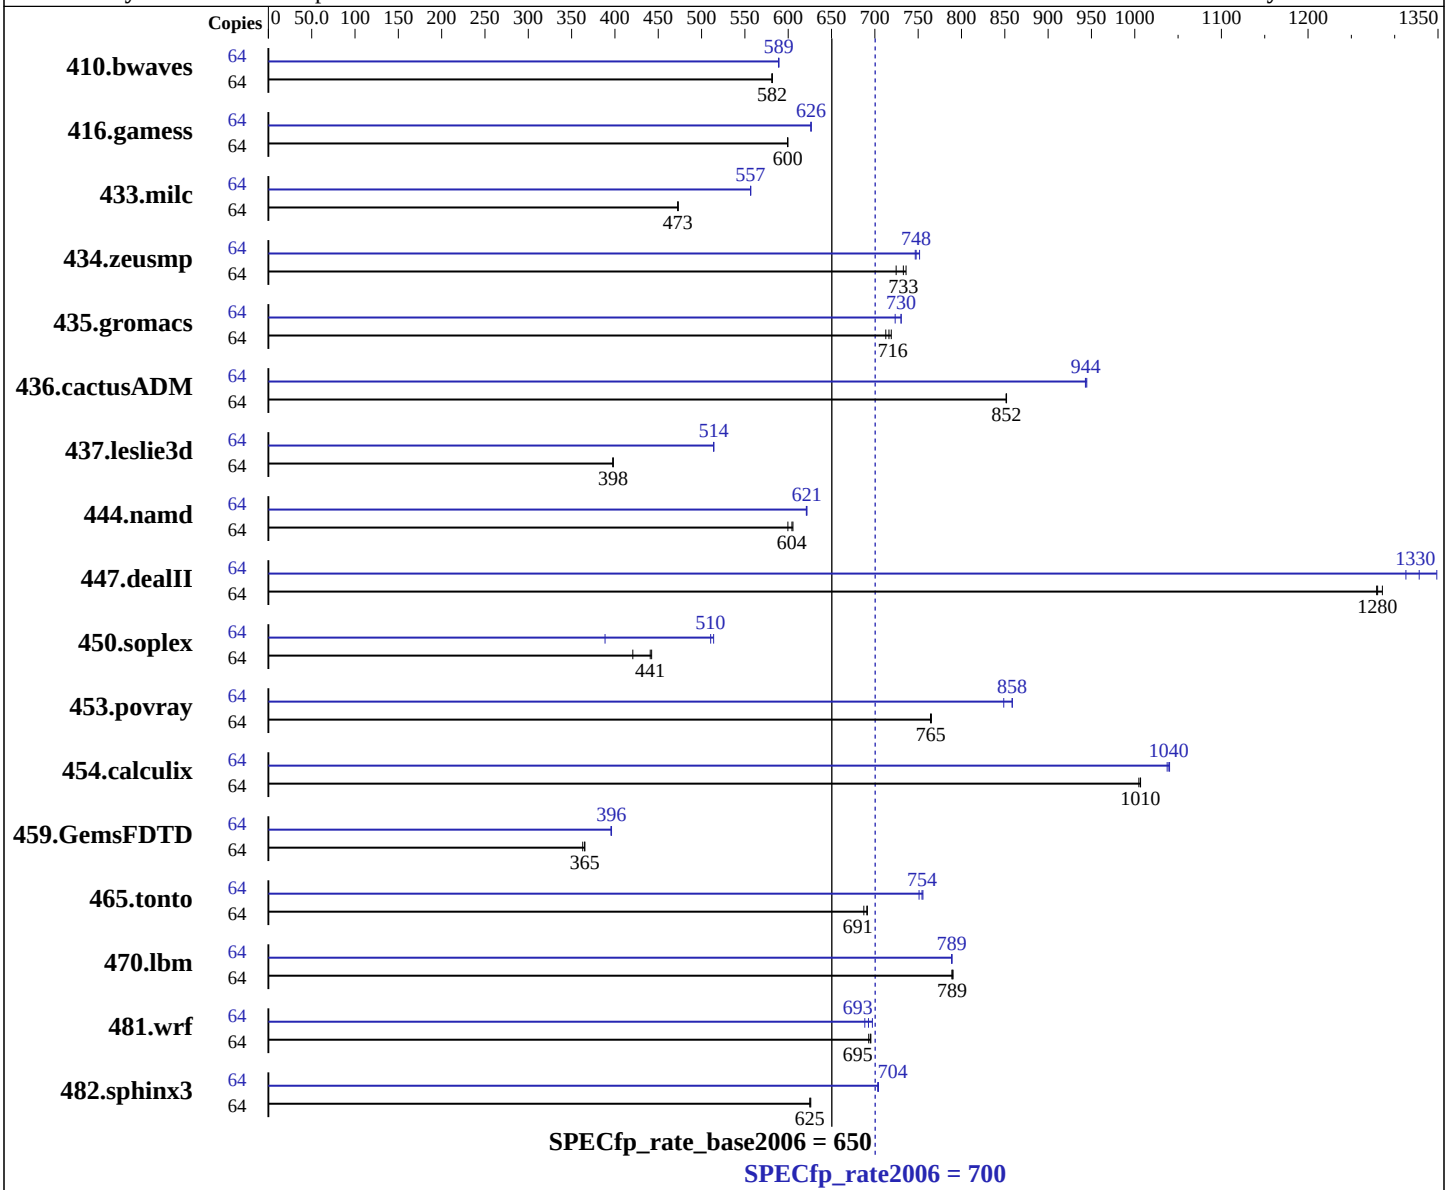

Hardware

CPU Name:	AMD Opteron 6274
CPU Characteristics:	AMD Turbo CORE technology up to 3.10 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	64 cores, 4 chips, 16 cores/chip
CPU(s) orderable:	2,4 chips

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
Compiler:	C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 M3
(AMD Opteron 6274)

SPECfp_rate2006 = 700

SPECfp_rate_base2006 = 650

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Feb-2012
Hardware Availability: Dec-2011
Software Availability: Jul-2011

Primary Cache:	512 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache:	16 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	16 MB I+D on chip per chip, 8 MB shared / 8 cores
Other Cache:	None
Memory:	256 GB (32 x 8 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	1 x 600 GB SATA, 15000 RPM
Other Hardware:	None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1497	581	1495	582	**1495**	**582**	64	1476	589	1477	589	**1476**	**589**
416.gamess	64	**2090**	**600**	2091	599	2090	600	64	2001	626	2000	627	**2001**	**626**
433.milc	64	**1243**	**473**	1243	473	1242	473	64	1055	557	1056	557	**1056**	**557**
434.zeusmp	64	804	725	**795**	**733**	791	736	64	**779**	**748**	780	747	775	752
435.gromacs	64	641	713	636	719	**638**	**716**	64	632	723	**626**	**730**	626	730
436.cactusADM	64	898	851	898	852	**898**	**852**	64	810	945	**811**	**944**	811	943
437.leslie3d	64	1513	398	1512	398	**1512**	**398**	64	1170	514	**1170**	**514**	1171	514
444.namd	64	856	600	848	605	**849**	**604**	64	**826**	**621**	827	621	826	622
447.dealII	64	**572**	**1280**	572	1280	569	1290	64	558	1310	543	1350	**551**	**1330**
450.soplex	64	1269	421	**1211**	**441**	1207	442	64	1374	389	**1046**	**510**	1039	514
453.povray	64	446	764	**445**	**765**	445	765	64	397	859	401	849	**397**	**858**
454.calculix	64	**525**	**1010**	524	1010	526	1000	64	**508**	**1040**	508	1040	509	1040
459.GemsFDTD	64	**1860**	**365**	1872	363	1859	365	64	1714	396	1717	395	**1715**	**396**
465.tonto	64	911	691	916	687	**912**	**691**	64	834	755	**835**	**754**	839	751
470.lbm	64	1113	790	1115	789	**1114**	**789**	64	**1115**	**789**	1115	789	1115	789
481.wrf	64	**1029**	**695**	1032	693	1028	695	64	1025	697	**1032**	**693**	1038	688
482.sphinx3	64	1995	625	1992	626	**1995**	**625**	64	1774	703	**1772**	**704**	1771	704

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot paramenter in /boot/grub/menu.lst
```

Continued on next page

Operating System Notes (Continued)

```
Set kernel/randomize_va_space=0 in /etc/sysctl.conf

Set vm/nr_hugepages=57344 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
 BIOS settings:
 Operating Mode set to Performance Mode
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/root/speccpu-rate-rev1104B1/amd1104-rate-libs-revB/32:/root/speccpu-rate-rev1104B1/amd1104-rate-libs-revB/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Binaries were compiled on a system with 2x AMD Opteron 6282SE chips + 64GB Memory using RHEL 6.1
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64 -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso

C++ benchmarks:
-march=bdver1 -Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET

Fortran benchmarks:
-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2 -OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso

Benchmarks using both Fortran and C:
-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso -LNO:blocking=off -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64 -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200 -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on -OPT:unroll_times_max=8 -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2 -CG:cmp_peep=on -CG:local_sched_alg=2 -INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso

C++ benchmarks:

444.namd: -march=bdver1 -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off -CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0 -fno-emit-exceptions -m32 -OPT:unroll_times_max=8 -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -m32
-HP:bdt=2m:heap=2m -WOPT:sib=on

453.povray: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:ignore_feedback=off -LNO:fu=4
-LNO:loop_model_simd=on -LNO:simd_rm_unity_remainder=on
-WOPT:aggstr=0 -HP:bdt=2m:heap=2m -CG:cmp_peep=on

416.gamess: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off
-HP:bdt=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre_minreg_level=2 -LNO:simd=0
-LNO:fusion=2 -HP:bdt=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll_size=0 -LNO:fission=2
-CG:load_exe=0 -CG:local_sched_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-HP:bdt=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off
-LNO:prefetch=2 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0
-WOPT:sib=on

Continued on next page

Peak Optimization Flags (Continued)

454.calculix: `-march=bdver1 -Ofast -OPT:unroll_size=256 -GRA:optimize_boundary=on -HP:bdt=2m:heap=2m`

481.wrf: `-march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -CG:load_exe=1 -HP -WOPT:sib=on`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.html`
`http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.xml`
`http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Mon Sep 22 18:39:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 March 2012.