SPEC® CFP2006 Result

Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp®2006 = Not Run

SPECfp_base2006 = 89.9

CPU2006 license:	9019	**Test date:**	Mar-2012
Test sponsor:	Cisco Systems	**Hardware Availability:**	Apr-2012
Tested by:	Cisco Systems	**Software Availability:**	Dec-2011

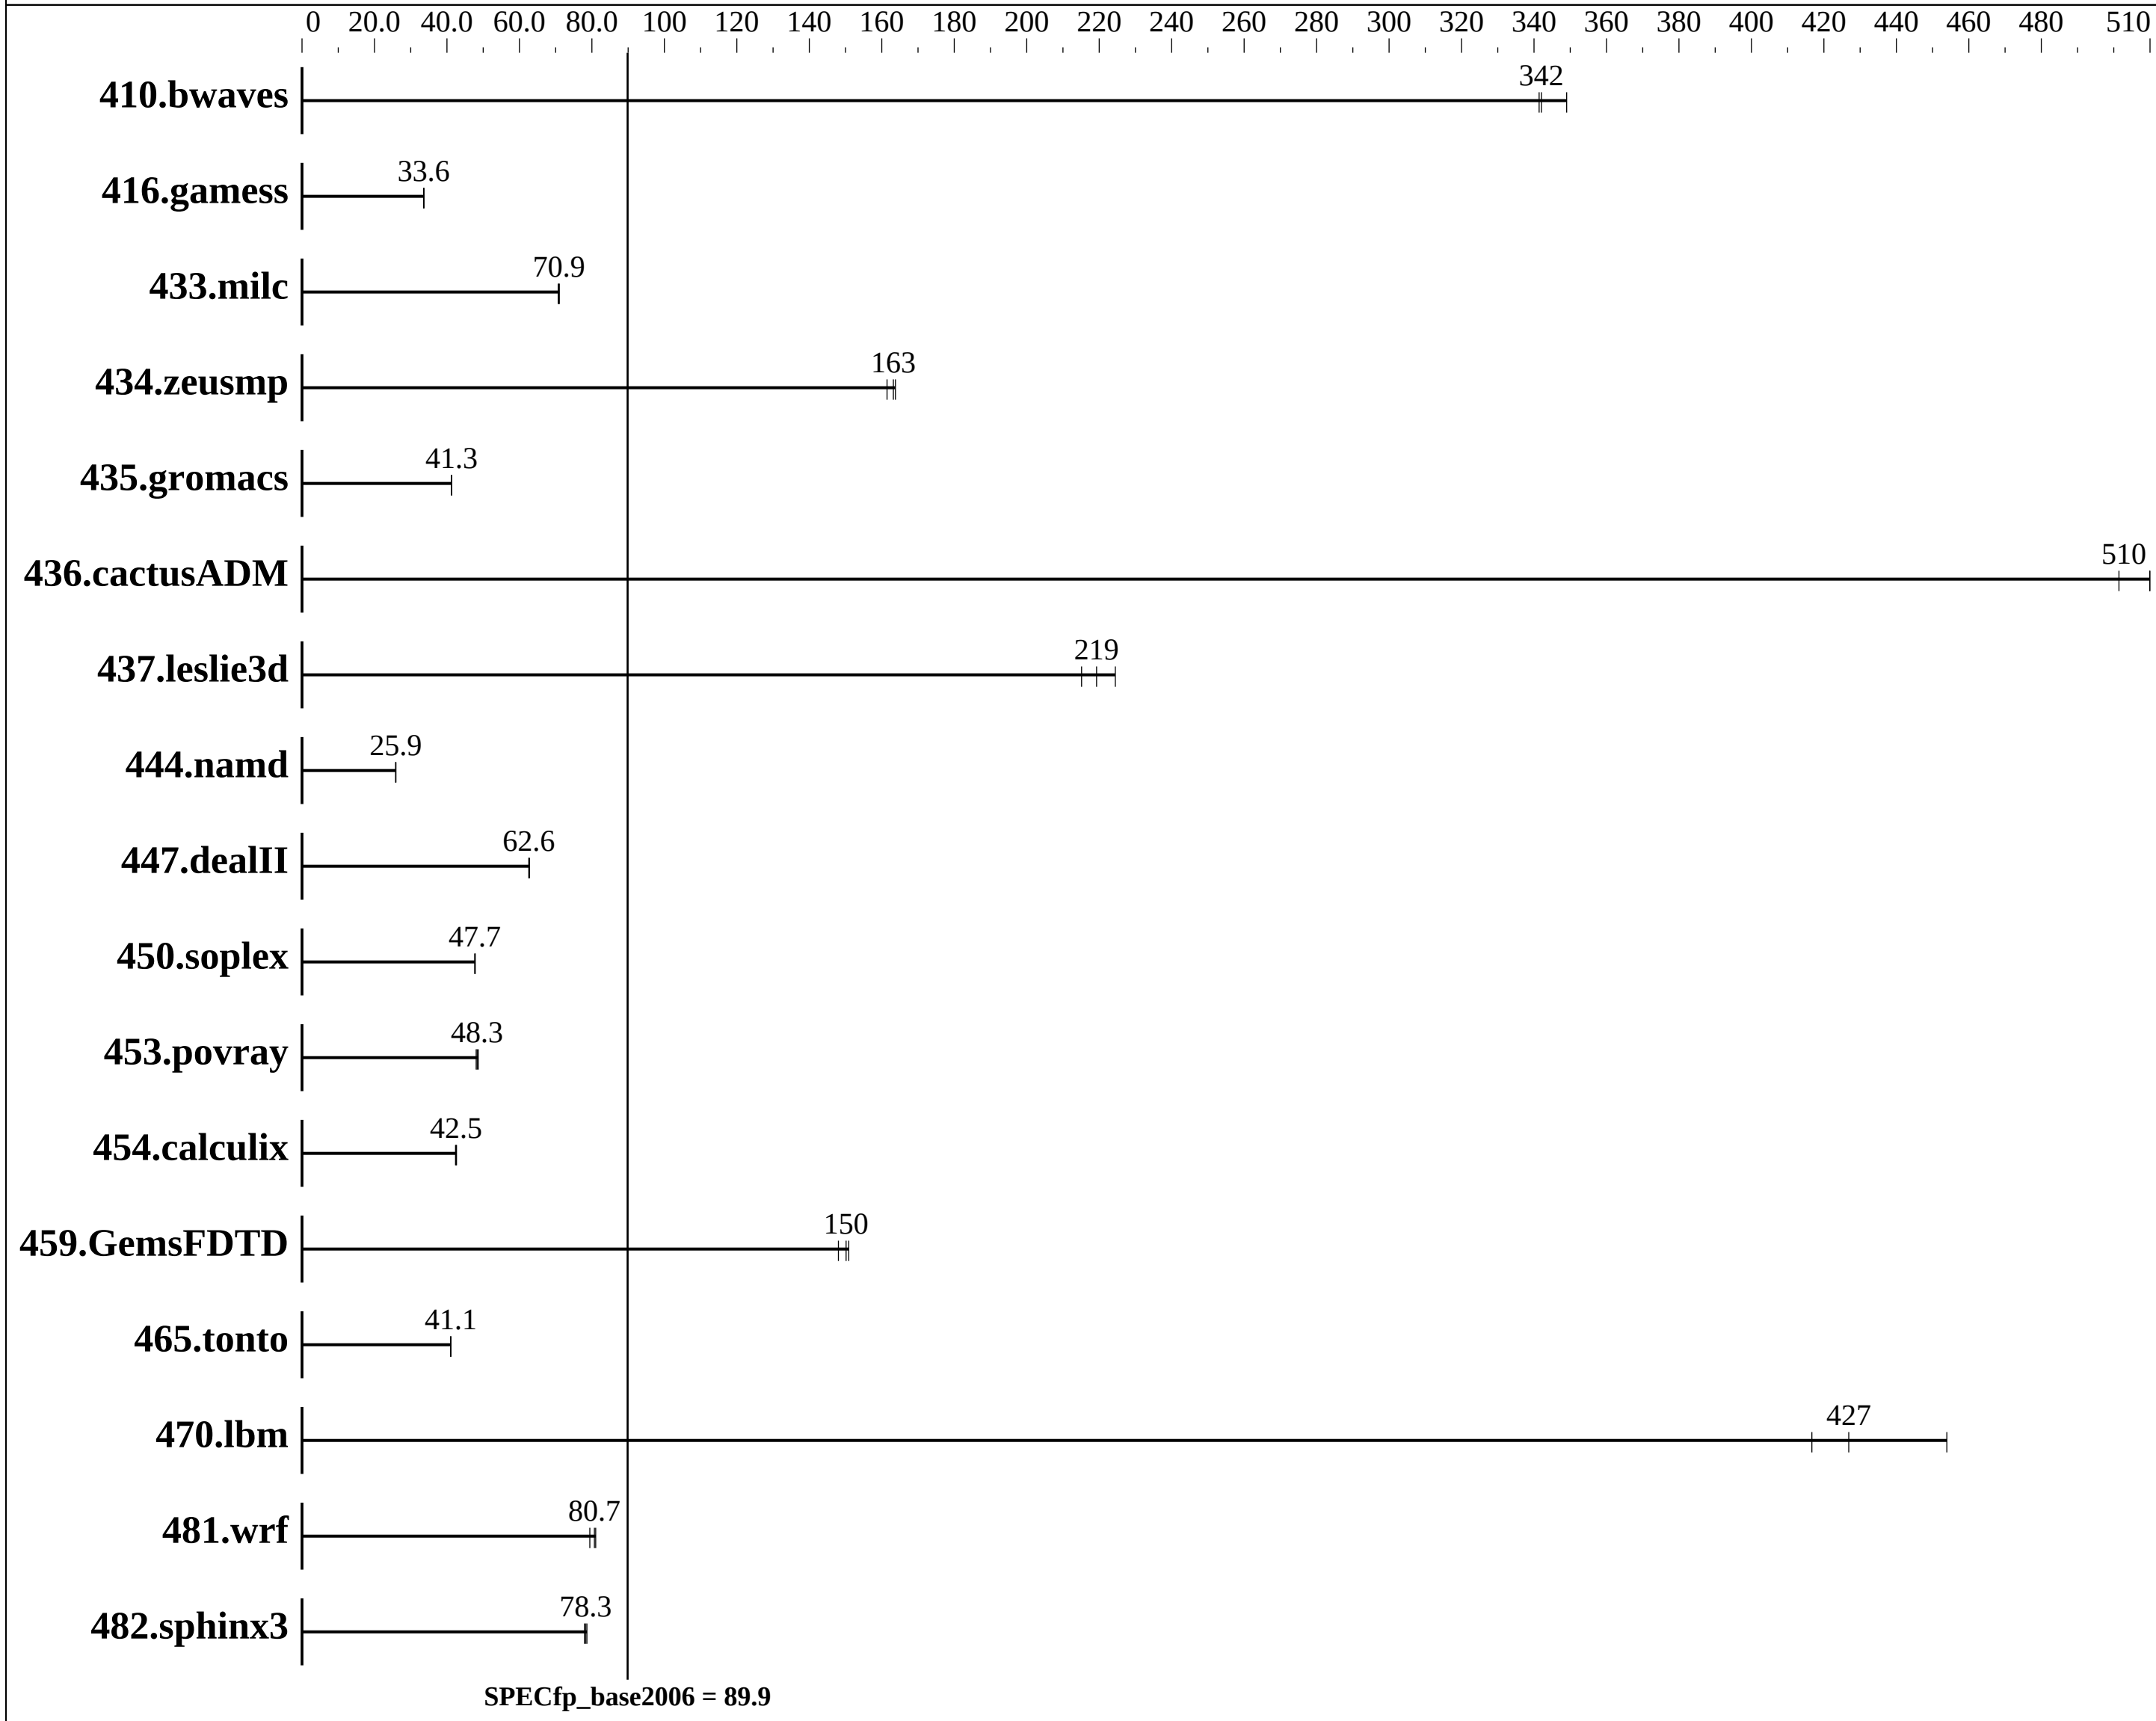

Hardware

CPU Name:	Intel Xeon E5-2690
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	2900
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp2006 = Not Run

SPECfp_base2006 = 89.9

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Mar-2012
Hardware Availability: Apr-2012
Software Availability: Dec-2011

L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	100 GB SSD, SATA Gen2, 3Gb/s
Other Hardware:	None

System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other Software:	None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	38.9	349	**39.7**	**342**	39.8	341						
416.gamess	**583**	**33.6**	583	33.6	582	33.7						
433.milc	**129**	**70.9**	129	71.0	130	70.7						
434.zeusmp	**55.8**	**163**	55.6	164	56.4	161						
435.gromacs	173	41.3	**173**	**41.3**	173	41.3						
436.cactusADM	**23.4**	**510**	23.4	510	23.8	501						
437.leslie3d	**42.9**	**219**	43.7	215	41.9	224						
444.namd	**310**	**25.9**	310	25.9	310	25.9						
447.dealII	182	62.8	183	62.6	**183**	**62.6**						
450.soplex	175	47.7	**175**	**47.7**	174	47.8						
453.povray	**110**	**48.3**	109	48.6	111	48.1						
454.calculix	195	42.4	193	42.6	**194**	**42.5**						
459.GemsFDTD	70.3	151	71.7	148	**70.7**	**150**						
465.tonto	240	41.0	240	41.1	**240**	**41.1**						
470.lbm	30.3	454	33.0	417	**32.2**	**427**						
481.wrf	138	81.0	**138**	**80.7**	141	79.4						
482.sphinx3	**249**	**78.3**	250	77.9	248	78.6						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Configuration:
Intel(R) Hyper-Threading Technology set to Disabled
Processor Power State C6 set to Disabled
Processor Power State C1 Enhanced set to Disabled
Power Technology set to Custom
Energy Performance set to Performance
DRAM Clock Throttling set to Performance
 Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800
 $Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on localhost.localdomain Fri Mar  2 13:02:45 2012
```

Continued on next page

Platform Notes (Continued)

```
This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2690 0 @ 2.90GHz
      2 "physical id"s (chips)
      16 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 8
      physical 0: cores 0 1 2 3 4 5 6 7
      physical 1: cores 0 1 2 3 4 5 6 7
   cache size : 20480 KB

From /proc/meminfo
   MemTotal:       132135396 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
   EST 2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 2 10:58

SPEC is set to: /opt/cpu2006-1.2
   Filesystem    Type    Size  Used Avail Use% Mounted on
   /dev/sda2     ext4     91G  7.5G   79G   9% /

Additional information from dmidecode:
  Memory:
   16x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 1 rank

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"
OMP_NUM_THREADS = "16"

 Binaries compiled on a system with 2 x Xeon X5650 CPU + 16GB memory
 running RHEL 6.2
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
```

Base Compiler Invocation

C benchmarks:
`icc   -m64`

C++ benchmarks:
`icpc  -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc   -m64 ifort -m64`

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp2006 = Not Run

SPECfp_base2006 = 89.9

CPU2006 license:	9019	**Test date:**	Mar-2012
Test sponsor:	Cisco Systems	**Hardware Availability:**	Apr-2012
Tested by:	Cisco Systems	**Software Availability:**	Dec-2011

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 03:36:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 March 2012.