SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer AT310 F2 (Intel Core i3-2120)

SPECfp®2006 = 50.8

SPECfp_base2006 = 50.0

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Dec-2011
Hardware Availability: Jan-2012
Software Availability: Dec-2011

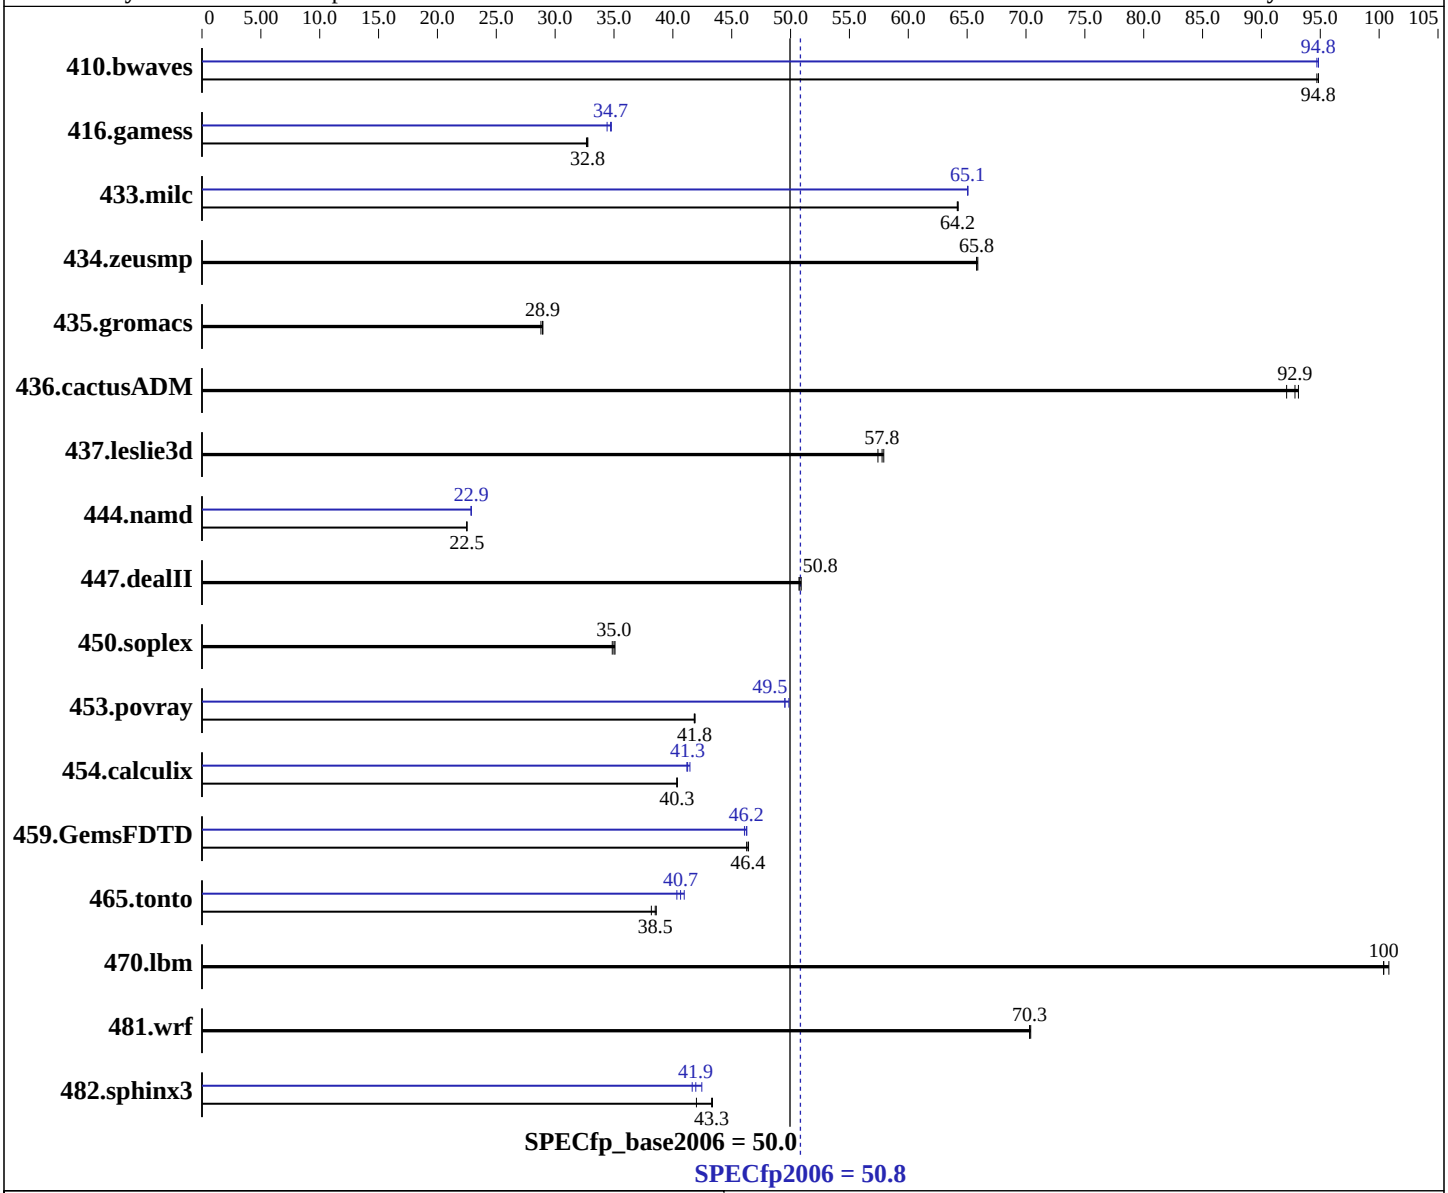

Hardware

CPU Name:	Intel Core i3-2120
CPU Characteristics:	
CPU MHz:	3300
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.1 (Santiago) 2.6.32-131.0.15.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer AT310 F2 (Intel Core i3-2120)

SPECfp2006 = 50.8

SPECfp_base2006 = 50.0

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Dec-2011
Hardware Availability: Jan-2012
Software Availability: Dec-2011

L3 Cache:	3 MB I+D on chip per chip
Other Cache:	None
Memory:	8 GB (2 x 4 GB 2Rx8 PC3-10600E-9,ECC)
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM
Other Hardware:	None

System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**143**	**94.8**	143	94.7	143	94.8	**143**	**94.8**	143	94.7	143	94.8
416.gamess	597	32.8	599	32.7	**598**	**32.8**	563	34.8	**564**	**34.7**	569	34.4
433.milc	143	64.2	**143**	**64.2**	143	64.2	**141**	**65.1**	141	65.0	141	65.1
434.zeusmp	**138**	**65.8**	138	65.9	138	65.8	**138**	**65.8**	138	65.9	138	65.8
435.gromacs	248	28.8	247	29.0	**247**	**28.9**	248	28.8	247	29.0	**247**	**28.9**
436.cactusADM	128	93.1	**129**	**92.9**	130	92.1	128	93.1	**129**	**92.9**	130	92.1
437.leslie3d	162	57.9	164	57.4	**163**	**57.8**	162	57.9	164	57.4	**163**	**57.8**
444.namd	356	22.5	356	22.5	**356**	**22.5**	**351**	**22.9**	351	22.9	351	22.9
447.dealII	**225**	**50.8**	225	50.9	226	50.7	**225**	**50.8**	225	50.9	226	50.7
450.soplex	238	35.1	239	34.9	**238**	**35.0**	238	35.1	239	34.9	**238**	**35.0**
453.povray	127	41.8	**127**	**41.8**	127	41.9	**107**	**49.5**	107	49.9	107	49.5
454.calculix	204	40.3	204	40.4	**204**	**40.3**	**200**	**41.3**	199	41.5	200	41.2
459.GemsFDTD	229	46.3	**229**	**46.4**	229	46.4	230	46.1	229	46.3	**229**	**46.2**
465.tonto	258	38.2	255	38.6	**256**	**38.5**	244	40.3	240	41.0	**242**	**40.7**
470.lbm	137	100	136	101	**137**	**100**	137	100	136	101	**137**	**100**
481.wrf	**159**	**70.3**	159	70.4	159	70.3	**159**	**70.3**	159	70.4	159	70.3
482.sphinx3	**450**	**43.3**	464	42.0	449	43.4	468	41.6	**465**	**41.9**	459	42.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /usr/cpu2006/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Fri Dec 30 10:59:27 2011

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Core(TM) i3-2120 CPU @ 3.30GHz
```

Continued on next page

Platform Notes (Continued)

```
      1 "physical id"s (chips)
      4 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 2
      siblings  : 4
      physical 0: cores 0 1
   cache size : 3072 KB

From /proc/meminfo
   MemTotal:        8046960 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.1 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux localhost.localdomain 2.6.32-131.0.15.el6.x86_64 #1 SMP Tue May 10
   15:42:40 EDT 2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 30 10:56

SPEC is set to: /usr/cpu2006
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/mapper/VolGroup-lv_root
                  ext4     50G   23G   24G  50% /

Additional information from dmidecode:

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"
OMP_NUM_THREADS = "2"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RHEL6.1_x64
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel -static

Continued on next page

Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 07:47:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 April 2012.