



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp[®]2006 = 79.8

SuperServer 6027TR-HTRF (X9DRT-HF, Intel E5-2665)

SPECfp_base2006 = 75.8

CPU2006 license: 001176


Test date: Mar-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Oct-2011

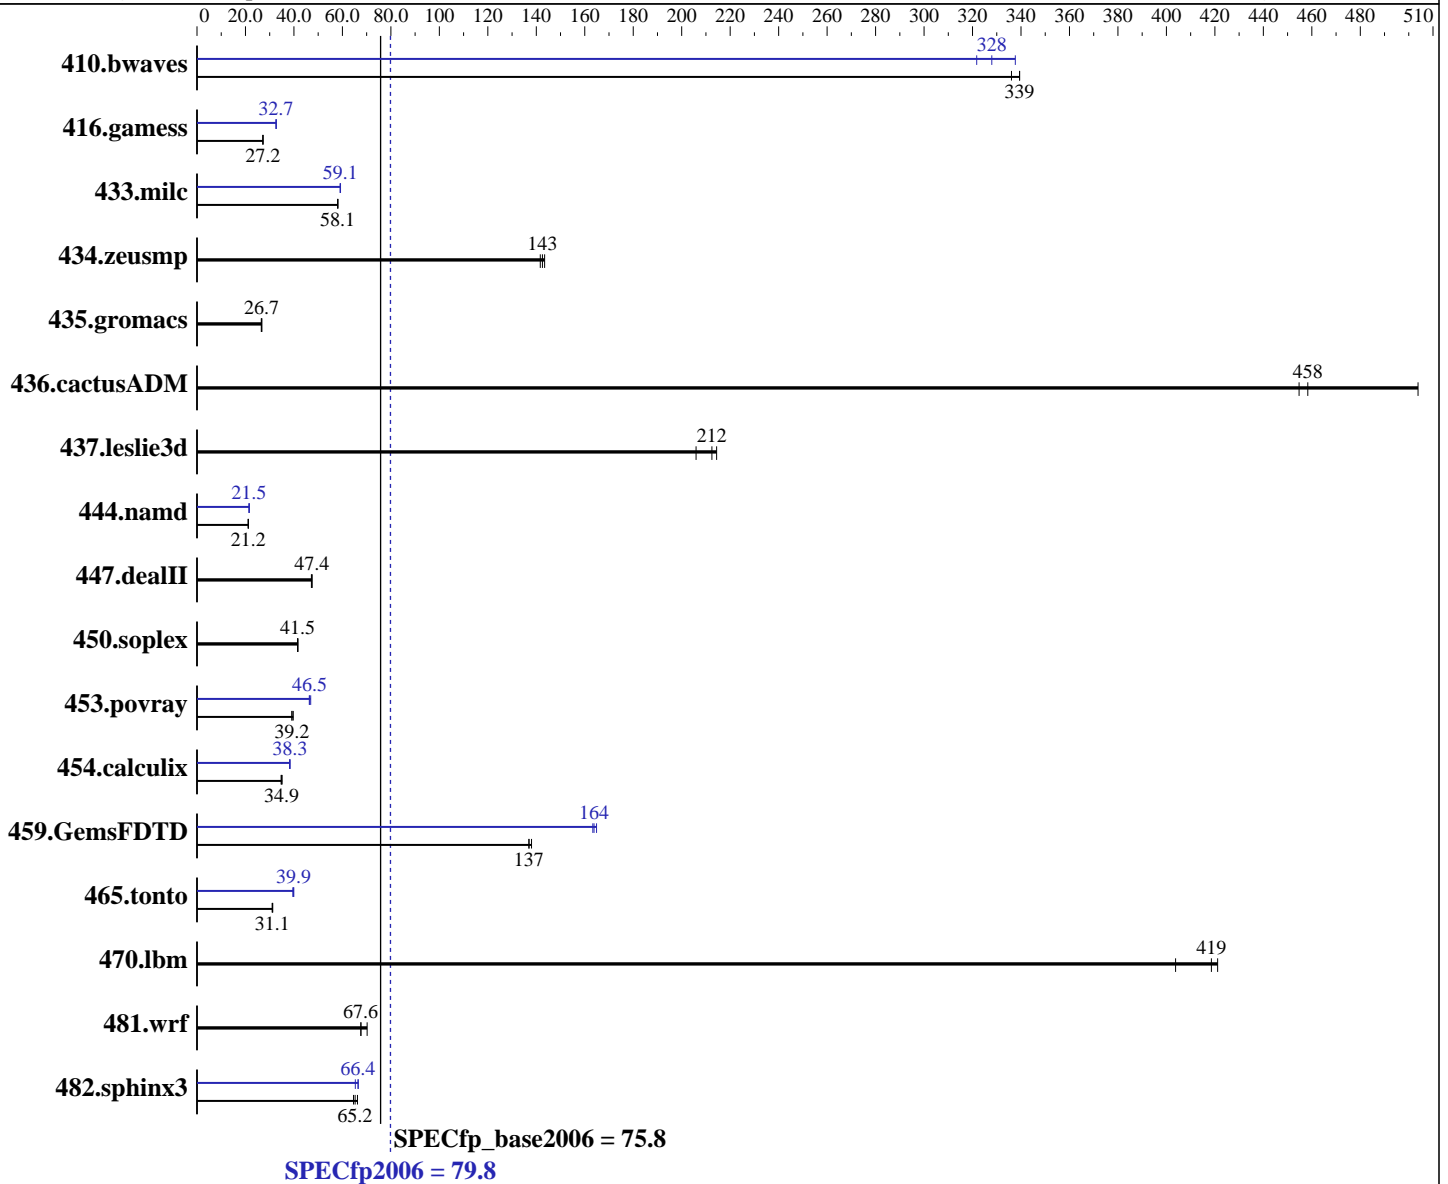

Hardware

CPU Name: Intel Xeon E5-2665
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server Release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = **79.8**

SuperServer 6027TR-HTRF (X9DRT-HF, Intel E5-2665)

SPECfp_base2006 = **75.8**

CPU2006 license: 001176

Test date: Mar-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Oct-2011

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40.0	339	40.4	336	40.0	339	42.2	322	40.2	338	41.4	328
416.gamess	720	27.2	718	27.3	720	27.2	600	32.6	600	32.7	599	32.7
433.milc	158	58.1	158	58.1	158	58.1	155	59.2	155	59.1	155	59.1
434.zeusmp	63.4	143	63.8	143	64.2	142	63.4	143	63.8	143	64.2	142
435.gromacs	267	26.7	267	26.7	269	26.5	267	26.7	267	26.7	269	26.5
436.cactusADM	26.3	455	23.7	504	26.1	458	26.3	455	23.7	504	26.1	458
437.leslie3d	45.6	206	43.8	214	44.2	212	45.6	206	43.8	214	44.2	212
444.namd	379	21.2	379	21.2	379	21.2	373	21.5	373	21.5	373	21.5
447.dealII	241	47.5	241	47.4	242	47.2	241	47.5	241	47.4	242	47.2
450.soplex	200	41.7	201	41.5	201	41.5	200	41.7	201	41.5	201	41.5
453.povray	136	39.2	134	39.7	136	39.1	115	46.3	113	46.9	114	46.5
454.calculix	235	35.1	236	34.9	238	34.7	216	38.2	215	38.3	215	38.4
459.GemsFDTD	77.5	137	77.5	137	76.9	138	65.0	163	64.8	164	64.4	165
465.tonto	315	31.3	317	31.0	316	31.1	249	39.5	247	39.9	246	39.9
470.lbm	32.6	421	32.8	419	34.0	404	32.6	421	32.8	419	34.0	404
481.wrf	159	70.2	165	67.6	165	67.6	159	70.2	165	67.6	165	67.6
482.sphinx3	299	65.2	302	64.6	294	66.2	293	66.4	298	65.3	293	66.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"
OMP_NUM_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 79.8

SuperServer 6027TR-HTRF (X9DRT-HF, Intel E5-2665)

SPECfp_base2006 = 75.8

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Mar-2012
Hardware Availability: Mar-2012
Software Availability: Oct-2011

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 79.8

SuperServer 6027TR-HTRF (X9DRT-HF, Intel E5-2665)

SPECfp_base2006 = 75.8

CPU2006 license: 001176

Test date: Mar-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Oct-2011

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 79.8

SuperServer 6027TR-HTRF (X9DRT-HF, Intel E5-2665)

SPECfp_base2006 = 75.8

CPU2006 license: 001176

Test date: Mar-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Oct-2011

Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 07:04:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 April 2012.