



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS R920 (Intel Xeon E5-2643)

**SPECfp®\_rate2006 = 331**

CPU2006 license: 19


Test date: Mar-2012

Test sponsor: Fujitsu

Hardware Availability: Mar-2012

Tested by: Fujitsu

Software Availability: Dec-2011

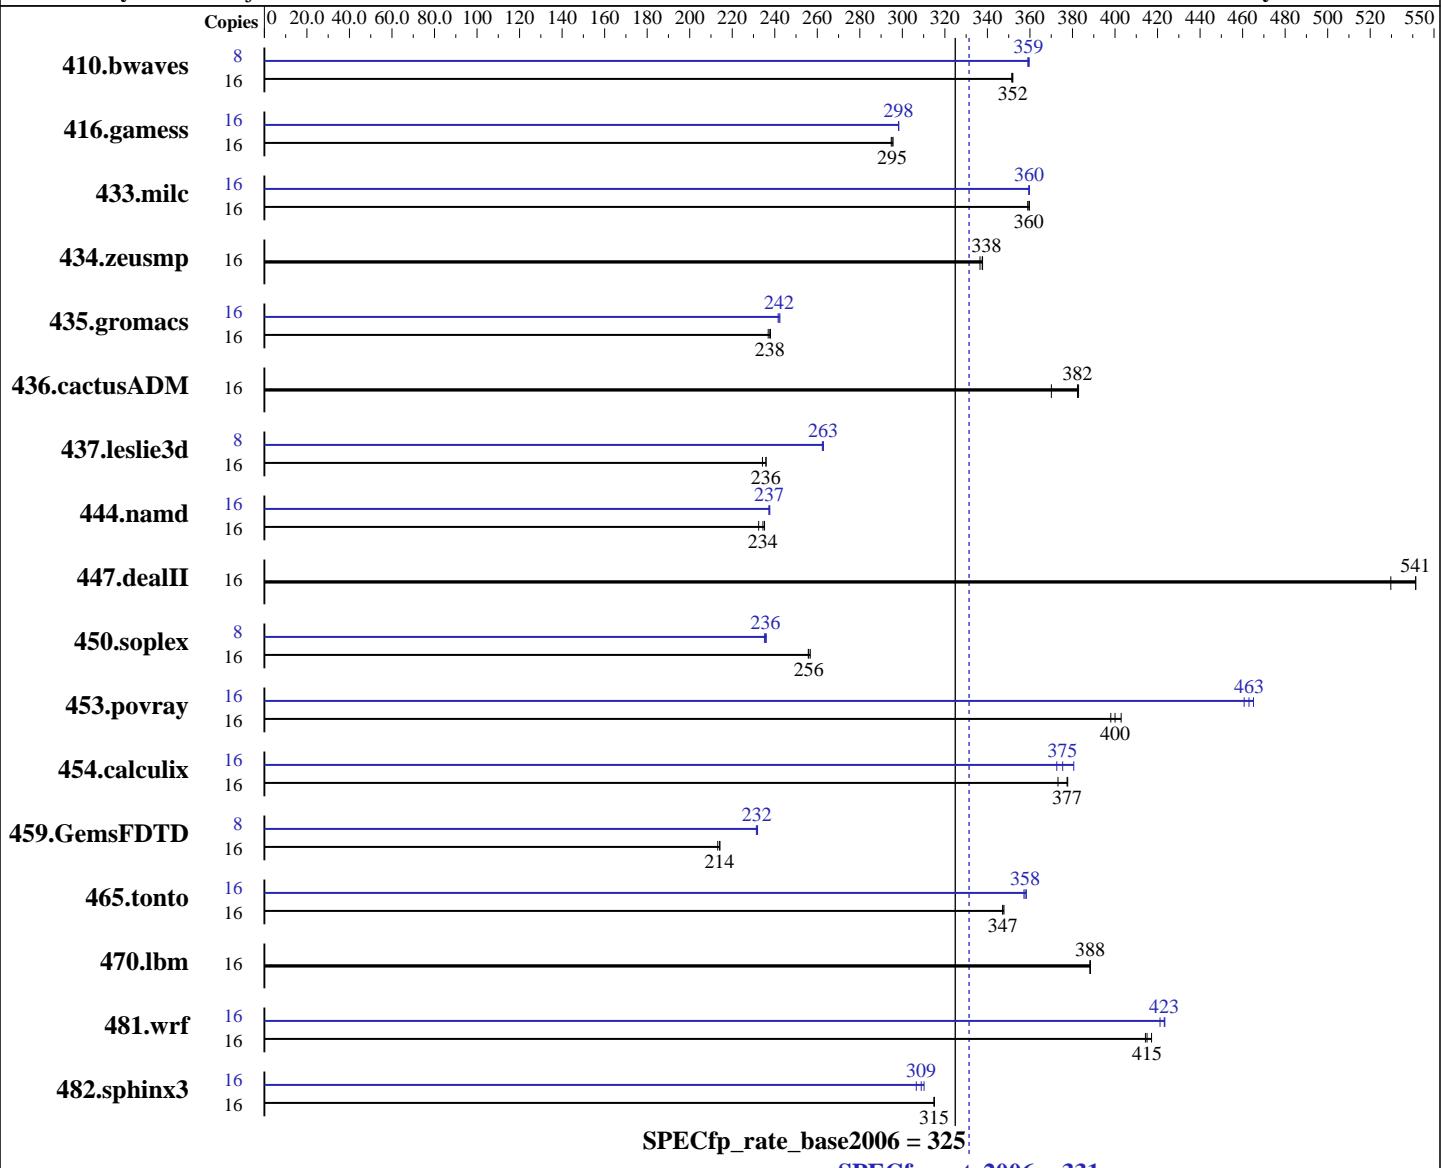

## Hardware

CPU Name: Intel Xeon E5-2643  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 6.1, 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.2.273 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi - user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

**SPECfp\_rate2006 = 331**

CELSIUS R920 (Intel Xeon E5-2643)

**SPECfp\_rate\_base2006 = 325**

CPU2006 license: 19

Test date: Mar-2012

Test sponsor: Fujitsu

Hardware Availability: Mar-2012

Tested by: Fujitsu

Software Availability: Dec-2011

L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx8 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x SATA III, 500 GB, 7200 rpm  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

| Benchmark     | Base   |            |            |             |            |            |            | Peak   |            |            |             |            |             |            |
|---------------|--------|------------|------------|-------------|------------|------------|------------|--------|------------|------------|-------------|------------|-------------|------------|
|               | Copies | Seconds    | Ratio      | Seconds     | Ratio      | Seconds    | Ratio      | Copies | Seconds    | Ratio      | Seconds     | Ratio      | Seconds     | Ratio      |
| 410.bwaves    | 16     | <b>618</b> | <b>352</b> | 619         | 351        | 618        | 352        | 8      | <b>303</b> | <b>359</b> | 302         | 360        | 303         | 359        |
| 416.gamess    | 16     | 1063       | 295        | <b>1061</b> | <b>295</b> | 1060       | 296        | 16     | 1051       | 298        | 1050        | 298        | <b>1051</b> | <b>298</b> |
| 433.milc      | 16     | 408        | 360        | 409         | 359        | <b>409</b> | <b>360</b> | 16     | 408        | 360        | <b>408</b>  | <b>360</b> | 409         | 359        |
| 434.zeusmp    | 16     | <b>431</b> | <b>338</b> | 433         | 337        | 431        | 338        | 16     | <b>431</b> | <b>338</b> | 433         | 337        | 431         | 338        |
| 435.gromacs   | 16     | <b>481</b> | <b>238</b> | 480         | 238        | 482        | 237        | 16     | <b>472</b> | <b>242</b> | 471         | 242        | 473         | 242        |
| 436.cactusADM | 16     | <b>500</b> | <b>382</b> | 499         | 383        | 517        | 370        | 16     | <b>500</b> | <b>382</b> | 499         | 383        | 517         | 370        |
| 437.leslie3d  | 16     | 642        | 234        | <b>638</b>  | <b>236</b> | 638        | 236        | 8      | <b>286</b> | <b>263</b> | 286         | 263        | 287         | 262        |
| 444.namd      | 16     | <b>547</b> | <b>234</b> | 546         | 235        | 552        | 232        | 16     | 541        | 237        | 540         | 238        | <b>541</b>  | <b>237</b> |
| 447.dealII    | 16     | 346        | 530        | 338         | 541        | <b>338</b> | <b>541</b> | 16     | 346        | 530        | 338         | 541        | <b>338</b>  | <b>541</b> |
| 450.soplex    | 16     | 522        | 256        | 520         | 257        | <b>521</b> | <b>256</b> | 8      | 284        | 235        | 283         | 236        | <b>283</b>  | <b>236</b> |
| 453.povray    | 16     | <b>213</b> | <b>400</b> | 211         | 403        | 214        | 398        | 16     | 183        | 465        | 185         | 461        | <b>184</b>  | <b>463</b> |
| 454.calculix  | 16     | 349        | 378        | <b>350</b>  | <b>377</b> | 354        | 373        | 16     | 354        | 373        | <b>352</b>  | <b>375</b> | 347         | 381        |
| 459.GemsFDTD  | 16     | 796        | 213        | 793         | 214        | <b>793</b> | <b>214</b> | 8      | <b>366</b> | <b>232</b> | 367         | 231        | 366         | 232        |
| 465.tonto     | 16     | 454        | 347        | 453         | 348        | <b>453</b> | <b>347</b> | 16     | <b>440</b> | <b>358</b> | 439         | 358        | 441         | 357        |
| 470.lbm       | 16     | 566        | 388        | <b>566</b>  | <b>388</b> | 566        | 388        | 16     | 566        | 388        | <b>566</b>  | <b>388</b> | 566         | 388        |
| 481.wrf       | 16     | 431        | 414        | <b>431</b>  | <b>415</b> | 428        | 417        | 16     | 424        | 421        | <b>422</b>  | <b>423</b> | 422         | 423        |
| 482.sphinx3   | 16     | 990        | 315        | 990         | 315        | <b>990</b> | <b>315</b> | 16     | 1005       | 310        | <b>1010</b> | <b>309</b> | 1017        | 307        |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file. For full details on using numactl, please refer to your Linux documentation, 'man numactl'

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS R920 (Intel Xeon E5-2643)

**SPECfp\_rate2006 = 331**

CPU2006 license: 19

Test date: Mar-2012

Test sponsor: Fujitsu

Hardware Availability: Mar-2012

Tested by: Fujitsu

Software Availability: Dec-2011

## Platform Notes

BIOS settings:

Frequency Floor Override = Enabled

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/work/cpu2006/libs/32:/work/cpu2006/libs/64"

Binaries compiled on a system with  
2x Xeon E5-2690 CPU + 64 GB memory using  
Red Hat Enterprise Linux Server release 6.1 (Santiago)  
Added glibc-static-2.12-1.25.el6.x86\_64.rpm  
to enable static linking

Transparent Huge Pages disabled with:  
echo never > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS R920 (Intel Xeon E5-2643)

**SPECfp\_rate2006 = 331**

CPU2006 license: 19

**Test date:** Mar-2012

Test sponsor: Fujitsu

**Hardware Availability:** Mar-2012

Tested by: Fujitsu

**Software Availability:** Dec-2011

## Base Portability Flags (Continued)

```
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS R920 (Intel Xeon E5-2643)

**SPECfp\_rate2006 = 331**

CPU2006 license: 19

Test date: Mar-2012

Test sponsor: Fujitsu

Hardware Availability: Mar-2012

Tested by: Fujitsu

Software Availability: Dec-2011

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
    -opt-mem-layout-trans=3

```

470.lbm: basepeak = yes

```

482.sphinx3: -xsse4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
    -unroll2

```

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
    -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -prof-use(pass 2) -static

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS R920 (Intel Xeon E5-2643)

SPECfp\_rate2006 = 331

CPU2006 license: 19

Test date: Mar-2012

Test sponsor: Fujitsu

Hardware Availability: Mar-2012

Tested by: Fujitsu

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xsSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -static  
-auto-p32 -ansi-alias -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 03:59:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 April 2012.