



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS M720 (Intel Xeon E5-1603)

**SPECfp®\_rate2006 = 136**

CPU2006 license: 19


Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

Test sponsor: Fujitsu

Tested by: Fujitsu

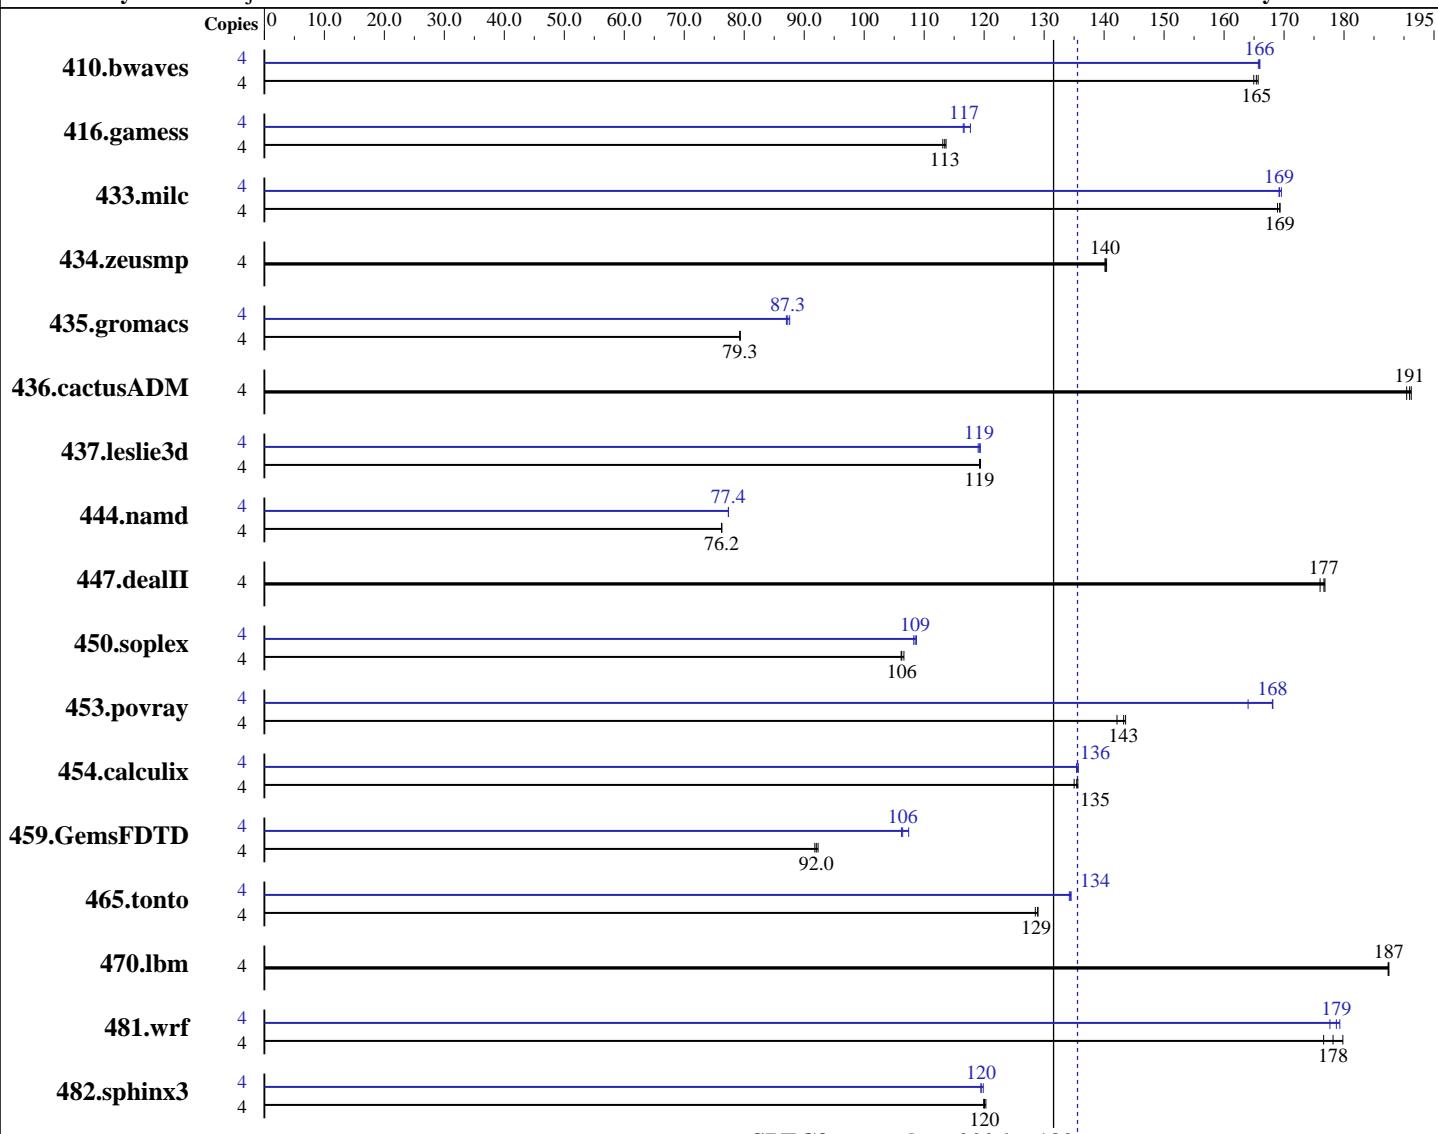

## Hardware

CPU Name: Intel Xeon E5-1603  
 CPU Characteristics:  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 6.2, 2.6.32-220.0.el6.x86\_64  
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi - user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

**SPECfp\_rate2006 = 136**

CELSIUS M720 (Intel Xeon E5-1603)

**SPECfp\_rate\_base2006 = 132**

CPU2006 license: 19

Test date: Apr-2012

Test sponsor: Fujitsu

Hardware Availability: Mar-2012

Tested by: Fujitsu

Software Availability: Feb-2012

L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8 x 4 GB 2Rx8 PC3-12800E-11, ECC, running at 1067 MHz and CL8)  
 Disk Subsystem: 1 x SATA III, 500 GB, 7200 rpm  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	330	165	<b>329</b>	<b>165</b>	328	166	4	328	166	328	166	<b>328</b>	<b>166</b>
416.gamess	4	692	113	689	114	<b>690</b>	<b>113</b>	4	672	117	<b>671</b>	<b>117</b>	665	118
433.milc	4	217	169	217	169	<b>217</b>	<b>169</b>	4	217	169	217	170	<b>217</b>	<b>169</b>
434.zeusmp	4	<b>260</b>	<b>140</b>	259	140	260	140	4	<b>260</b>	<b>140</b>	259	140	260	140
435.gromacs	4	360	79.3	360	79.3	<b>360</b>	<b>79.3</b>	4	<b>327</b>	<b>87.3</b>	326	87.6	328	87.0
436.cactusADM	4	250	191	<b>250</b>	<b>191</b>	251	190	4	250	191	<b>250</b>	<b>191</b>	251	190
437.leslie3d	4	315	119	<b>315</b>	<b>119</b>	315	119	4	316	119	315	119	<b>315</b>	<b>119</b>
444.namd	4	421	76.3	<b>421</b>	<b>76.2</b>	421	76.2	4	415	77.4	415	77.4	<b>415</b>	<b>77.4</b>
447.dealII	4	<b>259</b>	<b>177</b>	260	176	259	177	4	<b>259</b>	<b>177</b>	260	176	259	177
450.soplex	4	313	107	314	106	<b>314</b>	<b>106</b>	4	<b>307</b>	<b>109</b>	307	109	308	108
453.povray	4	150	142	<b>149</b>	<b>143</b>	148	144	4	<b>127</b>	<b>168</b>	130	164	127	168
454.calculix	4	243	136	<b>244</b>	<b>135</b>	244	135	4	<b>243</b>	<b>136</b>	243	136	244	135
459.GemsFDTD	4	<b>461</b>	<b>92.0</b>	460	92.3	462	91.8	4	400	106	395	107	<b>399</b>	<b>106</b>
465.tonto	4	305	129	<b>305</b>	<b>129</b>	306	129	4	293	135	<b>293</b>	<b>134</b>	293	134
470.lbm	4	<b>293</b>	<b>187</b>	293	187	293	187	4	<b>293</b>	<b>187</b>	293	187	293	187
481.wrf	4	248	180	<b>251</b>	<b>178</b>	253	177	4	249	179	<b>250</b>	<b>179</b>	252	178
482.sphinx3	4	648	120	650	120	<b>649</b>	<b>120</b>	4	650	120	653	119	<b>652</b>	<b>120</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor.  
 For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS M720 (Intel Xeon E5-1603)

**SPECfp\_rate2006 = 136**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

## Platform Notes

BIOS settings:

Frequency Floor Override = Enabled

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/work/cpu2006/libs/32:/work/cpu2006/libs/64"

Binaries compiled on a system with  
2x Xeon E5-2650 CPU + 64 GB memory using  
Red Hat Enterprise Linux Server release 6.2 (Santiago)  
The RPMs glibc-static-2.12-1.47.el6.x86\_64.rpm  
and glibc-static-2.12-1.47.el6.i686.rpm  
were added to enable static linking.

Transparent Huge Pages disabled with:  
echo never > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS M720 (Intel Xeon E5-1603)

**SPECfp\_rate2006 = 136**

CPU2006 license: 19

Test date: Apr-2012

Test sponsor: Fujitsu

Hardware Availability: Mar-2012

Tested by: Fujitsu

Software Availability: Feb-2012

## Base Portability Flags (Continued)

```
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
470.lbm: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX  
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
482.sphinx3: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS M720 (Intel Xeon E5-1603)

SPECfp\_rate2006 = 136

SPECfp\_rate\_base2006 = 132

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
    -opt-mem-layout-trans=3
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xsse4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
    -unroll2
```

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
    -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
```

```
453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -prof-use(pass 2) -static
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS M720 (Intel Xeon E5-1603)

SPECfp\_rate2006 = 136

CPU2006 license: 19

Test date: Apr-2012

Test sponsor: Fujitsu

Hardware Availability: Mar-2012

Tested by: Fujitsu

Software Availability: Feb-2012

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -static  
-auto-p32 -ansi-alias -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 04:03:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 April 2012.