SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS M720 (Intel Xeon E5-1660)

SPECfp®2006 = 82.3

SPECfp_base2006 = 79.6

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2012
Hardware Availability: Mar-2012
Software Availability: Feb-2012

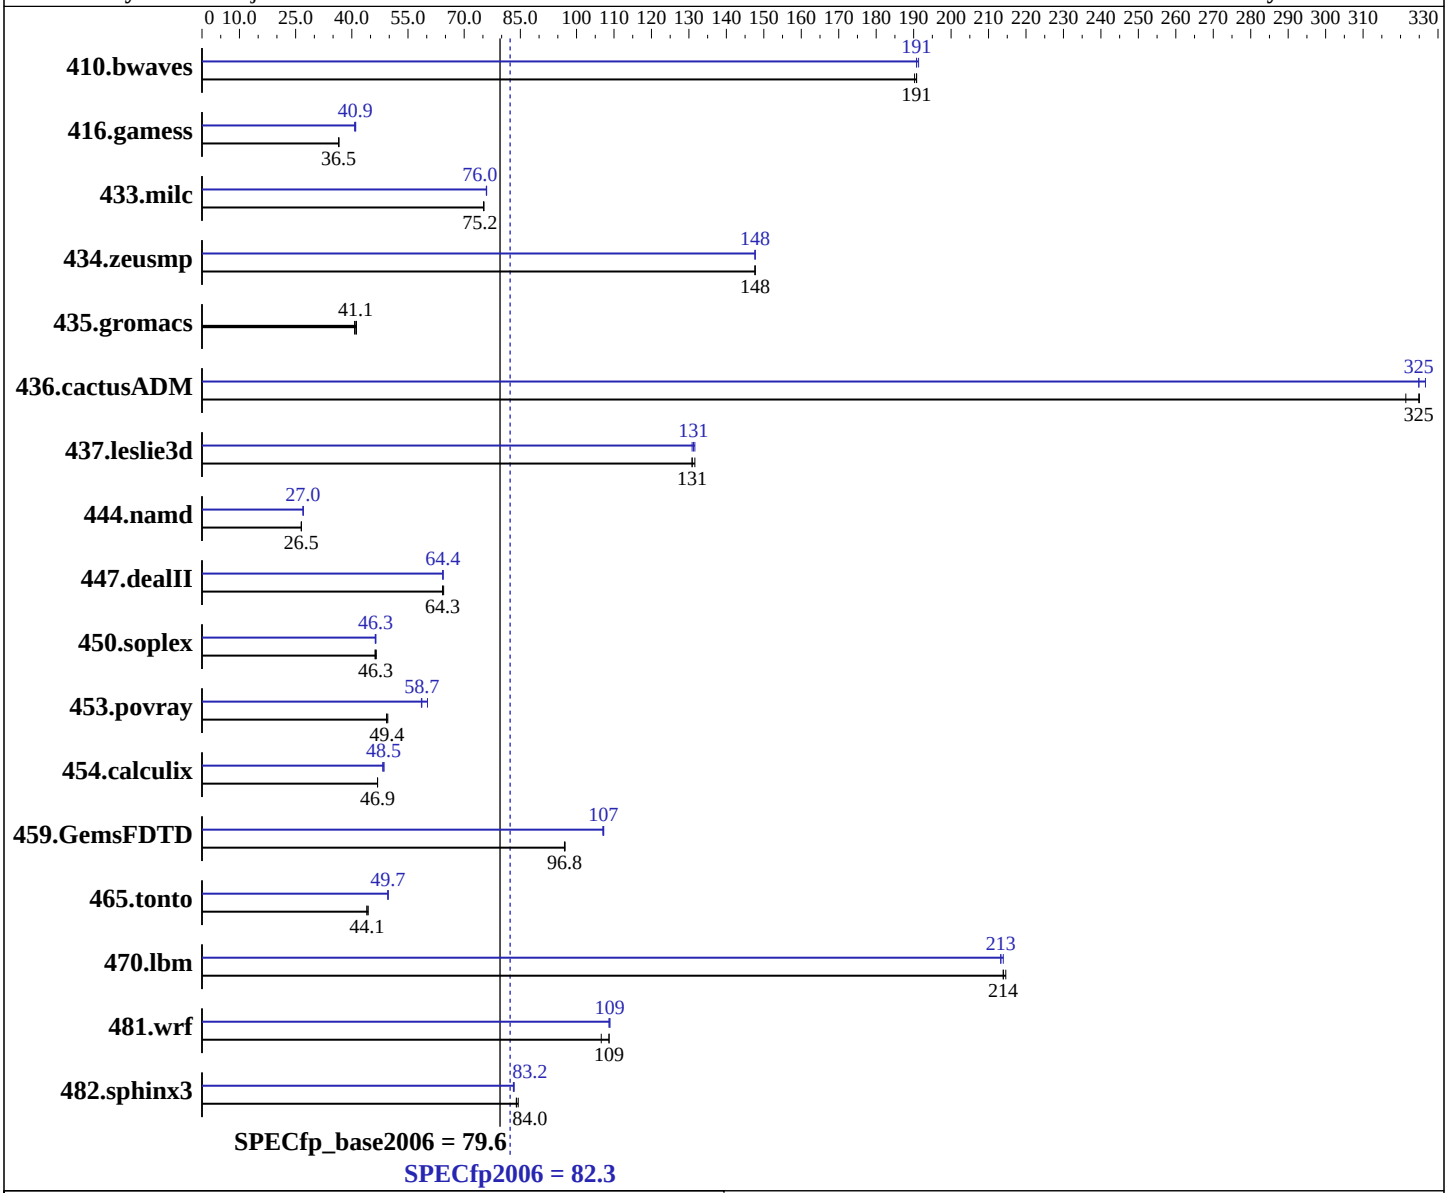

Hardware

CPU Name:	Intel Xeon E5-1660
CPU Characteristics:	Intel Turbo Boost Technology up to 3.90 GHz
CPU MHz:	3300
FPU:	Integrated
CPU(s) enabled:	6 cores, 1 chip, 6 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2, 2.6.32-220.0.el6.x86_64
Compiler:	C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi - user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS M720 (Intel Xeon E5-1660)

SPECfp2006 = 82.3

SPECfp_base2006 = 79.6

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2012
Hardware Availability: Mar-2012
Software Availability: Feb-2012

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8 x 4 GB 2Rx8 PC3-12800E-11, ECC)
Disk Subsystem: 1 x SATA III, 500 GB, 7200 rpm
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	71.2	191	**71.2**	**191**	71.4	190	71.0	191	71.2	191	**71.2**	**191**
416.gamess	536	36.5	537	36.5	**536**	**36.5**	**478**	**40.9**	477	41.0	480	40.7
433.milc	122	75.3	122	75.2	**122**	**75.2**	121	76.0	**121**	**76.0**	121	75.9
434.zeusmp	**61.6**	**148**	61.6	148	61.6	148	**61.6**	**148**	61.6	148	61.6	148
435.gromacs	**174**	**41.1**	173	41.2	175	40.7	**174**	**41.1**	173	41.2	175	40.7
436.cactusADM	37.2	321	36.8	325	**36.8**	**325**	**36.8**	**325**	36.6	327	36.8	325
437.leslie3d	**71.8**	**131**	71.4	132	71.8	131	71.8	131	**71.6**	**131**	71.4	132
444.namd	302	26.5	302	26.5	**302**	**26.5**	297	27.0	**297**	**27.0**	297	27.0
447.dealII	178	64.2	177	64.5	**178**	**64.3**	178	64.4	**178**	**64.4**	178	64.3
450.soplex	179	46.5	**180**	**46.3**	181	46.2	180	46.4	180	46.3	**180**	**46.3**
453.povray	**108**	**49.4**	107	49.6	108	49.3	90.8	58.6	**90.6**	**58.7**	88.4	60.2
454.calculix	176	46.9	176	46.9	**176**	**46.9**	170	48.6	171	48.2	**170**	**48.5**
459.GemsFDTD	109	96.9	**110**	**96.8**	110	96.8	**98.9**	**107**	99.1	107	98.9	107
465.tonto	**223**	**44.1**	222	44.4	224	44.0	**198**	**49.7**	198	49.6	198	49.7
470.lbm	**64.2**	**214**	64.0	215	64.2	214	64.4	213	64.2	214	**64.4**	**213**
481.wrf	**103**	**109**	105	107	103	109	103	109	103	109	**103**	**109**
482.sphinx3	232	83.9	**232**	**84.0**	231	84.4	234	83.3	234	83.1	**234**	**83.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS settings:
Hyper-Threading Technology = Disabled
Frequency Floor Override = Enabled
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/work/cpu2006/libs/32:/work/cpu2006/libs/64"
```

Continued on next page

General Notes (Continued)

```
OMP_NUM_THREADS = "6"

 Binaries compiled on a system with
 2x Xeon E5-2650 CPU + 64 GB memory using
 Red Hat Enterprise Linux Server release 6.2 (Santiago)
 The RPMs glibc-static-2.12-1.47.el6.x86_64.rpm
 and glibc-static-2.12-1.47.el6.i686.rpm
 were added to enable static linking.

 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
     410.bwaves: -DSPEC_CPU_LP64
     416.gamess: -DSPEC_CPU_LP64
       433.milc: -DSPEC_CPU_LP64
     434.zeusmp: -DSPEC_CPU_LP64
     435.gromacs: -DSPEC_CPU_LP64 -nofor_main
  436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
     437.leslie3d: -DSPEC_CPU_LP64
       444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
      450.soplex: -DSPEC_CPU_LP64
      453.povray: -DSPEC_CPU_LP64
     454.calculix: -DSPEC_CPU_LP64 -nofor_main
  459.GemsFDTD: -DSPEC_CPU_LP64
       465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
    482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Fortran benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:
```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32 -ansi-alias

470.lbm: -xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch -ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias -static

450.soplex: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: -xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

437.leslie3d: Same as 434.zeusmp

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: -xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch -ansi-alias

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `Same as 436.cactusADM`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html`
`http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml`
`http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 03:58:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 April 2012.