SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Blade X6270 M3 (Intel Xeon E5-2690 2.9GHz)

SPECfp®_rate2006 = 497

SPECfp_rate_base2006 = 460

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Mar-2012
Hardware Availability: Apr-2012
Software Availability: Jun-2012

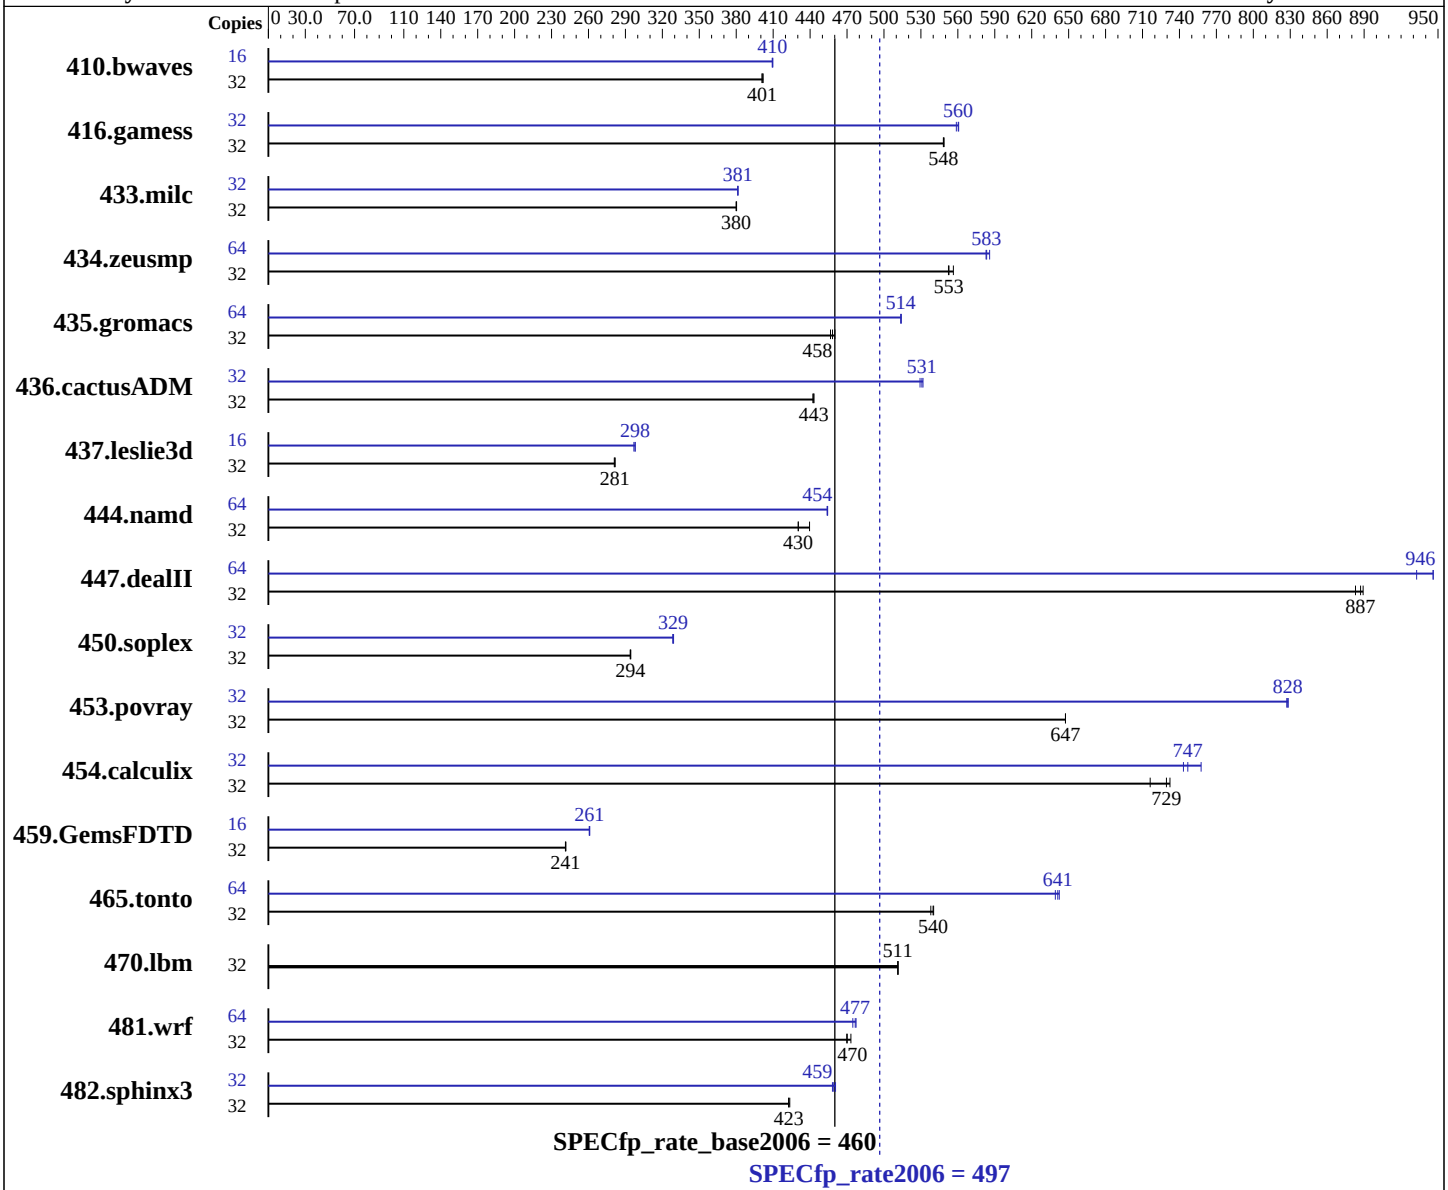

Hardware

CPU Name:	Intel Xeon E5-2690
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	2900
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Oracle Solaris 11 11/11 (SRU 02)
Compiler:	C/C++/Fortran: Version 12.3 of Oracle Solaris Studio (patch update 1, tested with nightly build 20120313)
Auto Parallel:	No
File System:	zfs (with raidz)
System State:	Default
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Blade X6270 M3 (Intel Xeon E5-2690 2.9GHz)

SPECfp_rate2006 = 497

SPECfp_rate_base2006 = 460

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Mar-2012
Hardware Availability: Apr-2012
Software Availability: Jun-2012

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 3 x 300 GB 10K RPM SAS
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1085	401	1082	402	**1084**	**401**	16	531	410	**531**	**410**	531	409
416.gamess	32	**1142**	**548**	1142	549	1143	548	32	1121	559	**1118**	**560**	1118	561
433.milc	32	772	380	**773**	**380**	773	380	32	770	381	770	381	**770**	**381**
434.zeusmp	32	527	552	**527**	**553**	523	556	64	**998**	**583**	999	583	994	586
435.gromacs	32	497	460	500	457	**499**	**458**	64	890	514	**889**	**514**	889	514
436.cactusADM	32	865	442	863	443	**863**	**443**	32	**720**	**531**	719	532	722	529
437.leslie3d	32	**1069**	**281**	1068	282	1071	281	16	505	298	507	297	**505**	**298**
444.namd	32	584	440	596	430	**596**	**430**	64	1131	454	1130	454	**1130**	**454**
447.dealII	32	**413**	**887**	415	883	412	889	64	774	946	785	933	**774**	**946**
450.soplex	32	908	294	**908**	**294**	907	294	32	811	329	**812**	**329**	812	329
453.povray	32	**263**	**647**	263	647	263	647	32	206	827	206	828	**206**	**828**
454.calculix	32	369	716	361	732	**362**	**729**	32	348	758	**354**	**747**	355	743
459.GemsFDTD	32	1405	242	1407	241	**1407**	**241**	16	651	261	**651**	**261**	650	261
465.tonto	32	**583**	**540**	583	540	585	538	64	980	642	985	639	**982**	**641**
470.lbm	32	**860**	**511**	860	511	860	511	32	**860**	**511**	860	511	860	511
481.wrf	32	755	473	761	470	**760**	**470**	64	1506	475	**1500**	**477**	1498	477
482.sphinx3	32	1476	423	1473	423	**1475**	**423**	32	1354	461	1361	458	**1358**	**459**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used to bind processes to CPU threads with pbind(1)
```

Operating System Notes

```
ulimit -s 10000  (shell): increases stack

/etc/system parameters
   autoup=1000
   zfs:zfs_arc_max=0x400000000
   zfs:zfs_arc_min=0x400000000
   ncsize=0x10000
   lpg_alloc_prefer=1

gzip compression set using "zfs set compression=gzip <zfs-filesystem>"
```

Platform Notes

```
Default BIOS Settings were used, except:
  Energy Performance set to Performance

Oracle's Sun Blade X6270 M3 is now known as the Sun Blade X3-2B.

Sysinfo program /benchpool/data1/cpu2006v1.2/Docs/sysinfo
: 6775  2011-08-16 #f7622badcf24e01c368b1db4377c
running on bur398-85 Thu Mar 29 01:33:11 2012

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo


From /usr/sbin/psrinfo -pv
 Intel(r) Xeon(r) CPU E5-2690 0 @ 2.90GHz
 x86 (GenuineIntel 206D7 family 6 model 45 step 7 clock 2893 MHz)

/usr/sbin/psrinfo -p:   2 chips
/usr/sbin/psrinfo -pv | grep "core has" | wc -l:  16 cores
/usr/sbin/psrinfo | wc -l: 32 threads

/usr/sbin/prtconf | grep "Memory size:": 131038 Megabytes

/etc/release:
                            Oracle Solaris 11 11/11 X86
uname -a:
SunOS bur398-85 5.11 11.0 i86pc i386 i86pc

disk: df -h
Filesystem             Size   Used  Available Capacity  Mounted on
benchpool/data1        545G    16G       529G     4%    /benchpool/data1

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
OMP_NUM_THREADS = "1"
```

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_WORDS_LITTLEENDIAN
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-g -fast -xipo=2 -m64 -xalias_level=std

C++ benchmarks:
-fast -xipo=2 -m64 -xpagesize=2M -xalias_level=compatible
-library=stdcxx4

Fortran benchmarks:
-fast -xipo=2 -m64 -xpagesize=2M

Benchmarks using both Fortran and C:
-g -fast(cc) -xipo=2 -m64 -xalias_level=std -fast(f90)
-xpagesize=2M

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Peak Portability Flags

436.cactusADM: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_WORDS_LITTLEENDIAN

Peak Optimization Flags

C benchmarks:

433.milc: -g -fast -xipo=2 -m64 -xpagesize=2M -xalias_level=std

470.lbm: basepeak = yes

482.sphinx3: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=2M -xalias_level=std -xunroll=6
-W2,-Aujam:noinner -lumem -lmvec

C++ benchmarks:

444.namd: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xO3
-xprefetch=no%auto -m64 -xpagesize=2M
-xalias_level=compatible -library=stlport4

447.dealII: -fast -xipo=2 -m64 -xpagesize=2M -xalias_level=compatible
-library=stdcxx4 -xvector -xprefetch

450.soplex: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=2M -xalias_level=compatible -library=stlport4
-m32 -qoption iropt -Rujam -qoption iropt -Rtile

Continued on next page

Peak Optimization Flags (Continued)

453.povray: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xprefetch=no%auto
-xipo=2 -m64 -xpagesize=2M -xalias_level=compatible
-qoption iropt -Atile:skew=on -qoption iropt -Ainline:cs=700
-library=stlport4

Fortran benchmarks:

410.bwaves: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=2M

416.gamess: -fast -xipo=2 -m64 -xpagesize=2M -xunroll=1
-xvector=no%simd -xprefetch=no%auto

434.zeusmp: Same as 410.bwaves

437.leslie3d: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64

459.GemsFDTD: Same as 410.bwaves

465.tonto: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=2M -xvector=lib -xalias -lbsdmalloc

Benchmarks using both Fortran and C:

435.gromacs: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xipo=2 -m64 -xpagesize=2M -fsimple=2
-Qoption ube -fsimple=3 -xvector=no%simd

436.cactusADM: -g -fast(cc) -fast(f90) -xipo=2 -m64 -xpagesize=2M
-lumem

454.calculix: -g -fast(cc) -fast(f90) -xipo=0 -m64 -xpagesize=2M
-xprefetch_level=2 -xprefetch_auto_type=indirect_array_access
-Qoption ube -xprefetch_mult=24 -xunroll=2

481.wrf: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xipo=2 -m64

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-x86_64.html
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.20120425.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-x86_64.xml
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.20120425.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 04:15:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 April 2012.