



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp®2006 = 47.3

NovaScale R440 F3 (Intel Xeon E5-2603, 1.80 GHz)

SPECfp_base2006 = 45.4

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

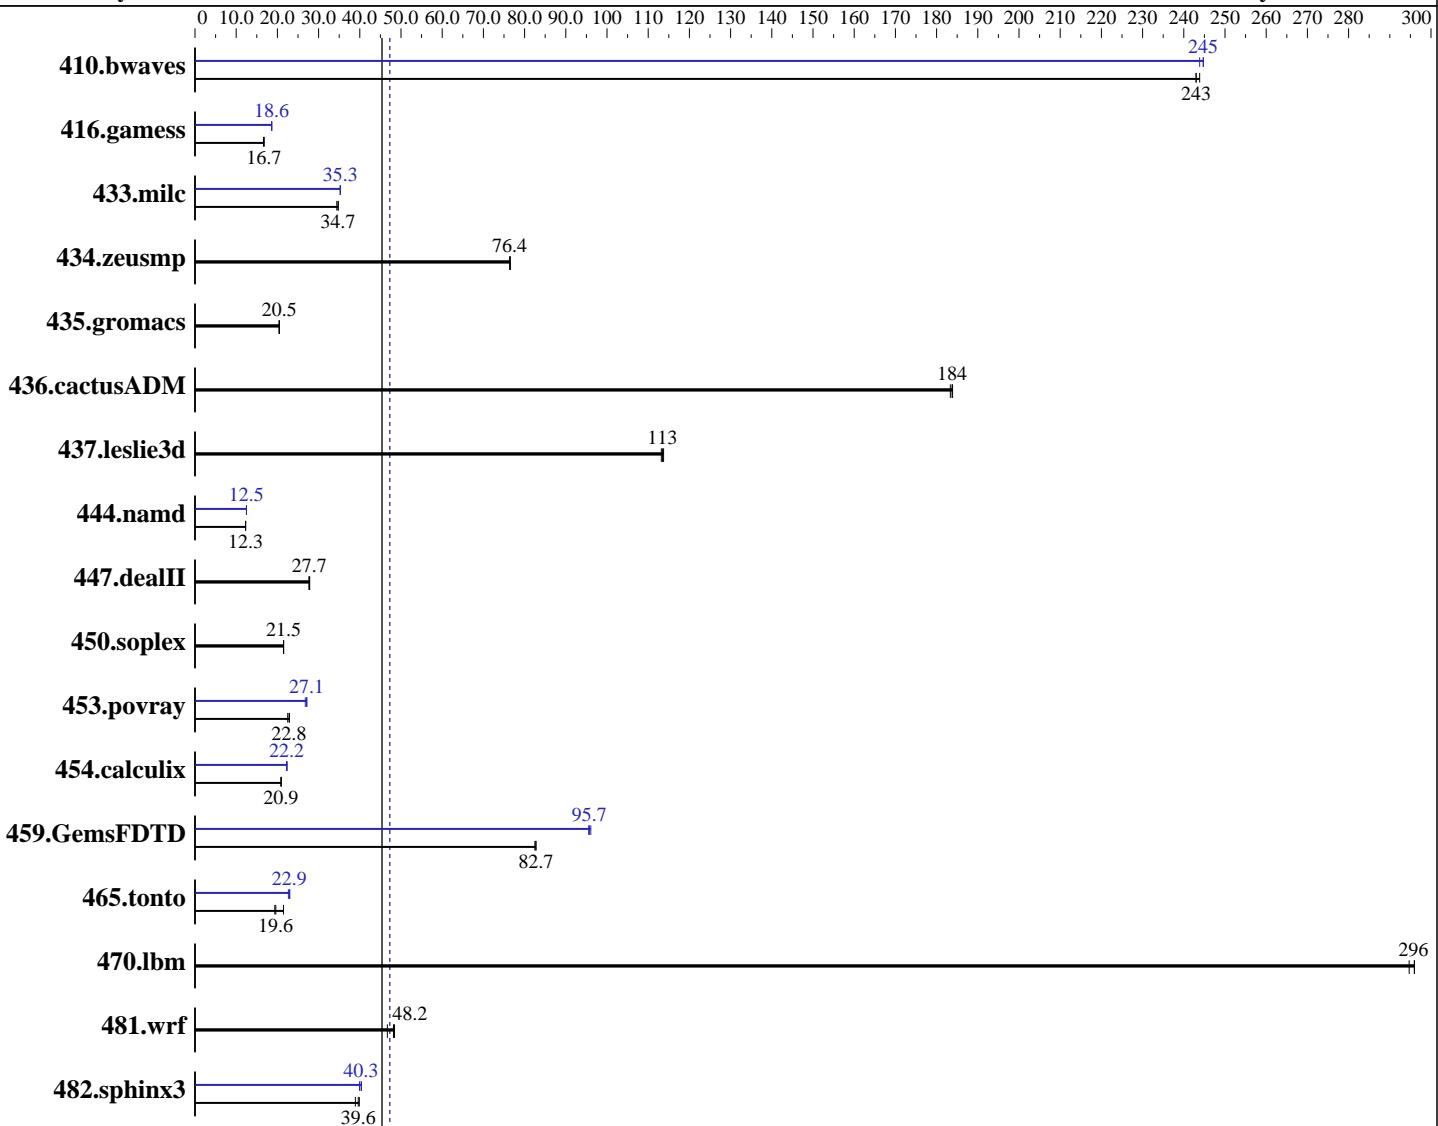

Hardware

CPU Name: Intel Xeon E5-2603
CPU Characteristics:
CPU MHz: 1800
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86_64)
3.0.13-0.9-default
Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE
for Linux;
Fortran: Version 12.1.0.225 of Intel Fortran
Studio XE for Linux
Auto Parallel: Yes
File System: ext3
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 47.3

NovaScale R440 F3 (Intel Xeon E5-2603, 1.80 GHz)

SPECfp_base2006 = 45.4

CPU2006 license: 20

Test date: Apr-2012

Test sponsor: Bull SAS

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache:	10 MB I+D on chip per chip	Base Pointers:	64-bit
Other Cache:	None	Peak Pointers:	32/64-bit
Memory:	128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz)	Other Software:	None
Disk Subsystem:	2 x 146 GB 15000 RPM SAS, RAID 0		
Other Hardware:	None		

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	55.9	243	55.9	243	55.7	244	55.5	245	55.7	244	55.5	245
416.gamess	1168	16.8	1177	16.6	1170	16.7	1052	18.6	1051	18.6	1053	18.6
433.milc	264	34.7	264	34.7	267	34.4	260	35.3	260	35.3	260	35.3
434.zeusmp	119	76.4	119	76.5	119	76.4	119	76.4	119	76.5	119	76.4
435.gromacs	349	20.5	348	20.5	350	20.4	349	20.5	348	20.5	350	20.4
436.cactusADM	65.2	183	65.0	184	65.0	184	65.2	183	65.0	184	65.0	184
437.leslie3d	82.8	113	82.6	114	83.0	113	82.8	113	82.6	114	83.0	113
444.namd	653	12.3	652	12.3	653	12.3	642	12.5	642	12.5	642	12.5
447.dealII	413	27.7	413	27.7	411	27.8	413	27.7	413	27.7	411	27.8
450.soplex	388	21.5	388	21.5	388	21.5	388	21.5	388	21.5	388	21.5
453.povray	232	22.9	236	22.5	233	22.8	199	26.8	196	27.2	196	27.1
454.calculix	395	20.9	394	20.9	395	20.9	371	22.2	371	22.2	369	22.4
459.GemsFDTD	129	82.5	128	82.8	128	82.7	111	95.6	111	95.7	110	96.1
465.tonto	508	19.4	502	19.6	458	21.5	428	23.0	429	22.9	434	22.7
470.lbm	46.6	295	46.4	296	46.4	296	46.6	295	46.4	296	46.4	296
481.wrf	239	46.7	231	48.4	232	48.2	239	46.7	231	48.4	232	48.2
482.sphinx3	489	39.9	501	38.9	492	39.6	482	40.4	484	40.3	488	39.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

C States/C1E set to Enabled

Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date:: 2011-10-11 ## 6f2ebdff5032aaa42e583f96b07f99d3
running on unsvr Fri Apr 13 12:04:11 2012

This section contains SUT (System Under Test) info as seen by

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 47.3

NovaScale R440 F3 (Intel Xeon E5-2603, 1.80 GHz)

SPECfp_base2006 = 45.4

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2603 0 @ 1.80GHz
  2 "physical id"s (chips)
  8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings : 4
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      132089856 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 11 (x86_64)
  VERSION = 11
  PATCHLEVEL = 2
```

```
uname -a:
Linux unsvr 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012 (54ddfaf)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 13 01:15 last=S
```

```
SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      ext3  265G   68G  183G  28% /
```

Additional information from dmidecode:

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/root/CPU2006-1.2/lib32:/root/CPU2006-1.2/lib64"

OMP_NUM_THREADS = "8"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 47.3

NovaScale R440 F3 (Intel Xeon E5-2603, 1.80 GHz)

SPECfp_base2006 = 45.4

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages disabled with:

```
echo never > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

The Dell PowerEdge R620 and

the Bull NovaScale R440 F3 models are electronically equivalent.

The results have been measured on a Dell PowerEdge R620 model.

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440 F3 (Intel Xeon E5-2603, 1.80 GHz)

SPECfp2006 = 47.3

SPECfp_base2006 = 45.4

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440 F3 (Intel Xeon E5-2603, 1.80 GHz)

SPECfp2006 =

47.3

SPECfp_base2006 =

45.4

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date:

Apr-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: basepeak = yes
```

```
453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
            -static
```

```
416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
            -inline-level=0 -scalar-rep -static
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: basepeak = yes
```

```
459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
               -inline-level=0 -opt-prefetch -parallel
```

```
465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
            -opt-malloc-options=3 -auto -unroll4
```

Benchmarks using both Fortran and C:

```
435.gromacs: basepeak = yes
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias
```

```
481.wrf: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 47.3

NovaScale R440 F3 (Intel Xeon E5-2603, 1.80 GHz)

SPECfp_base2006 = 45.4

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 04:50:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 May 2012.