



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp®2006 = 35.7

SuperServer 1017C-TF (X9SCL-F, Intel G530)

SPECfp\_base2006 = 35.0

CPU2006 license: 001176


Test date: Apr-2012

Test sponsor: Supermicro

Hardware Availability: Apr-2011

Tested by: Supermicro

Software Availability: Oct-2011

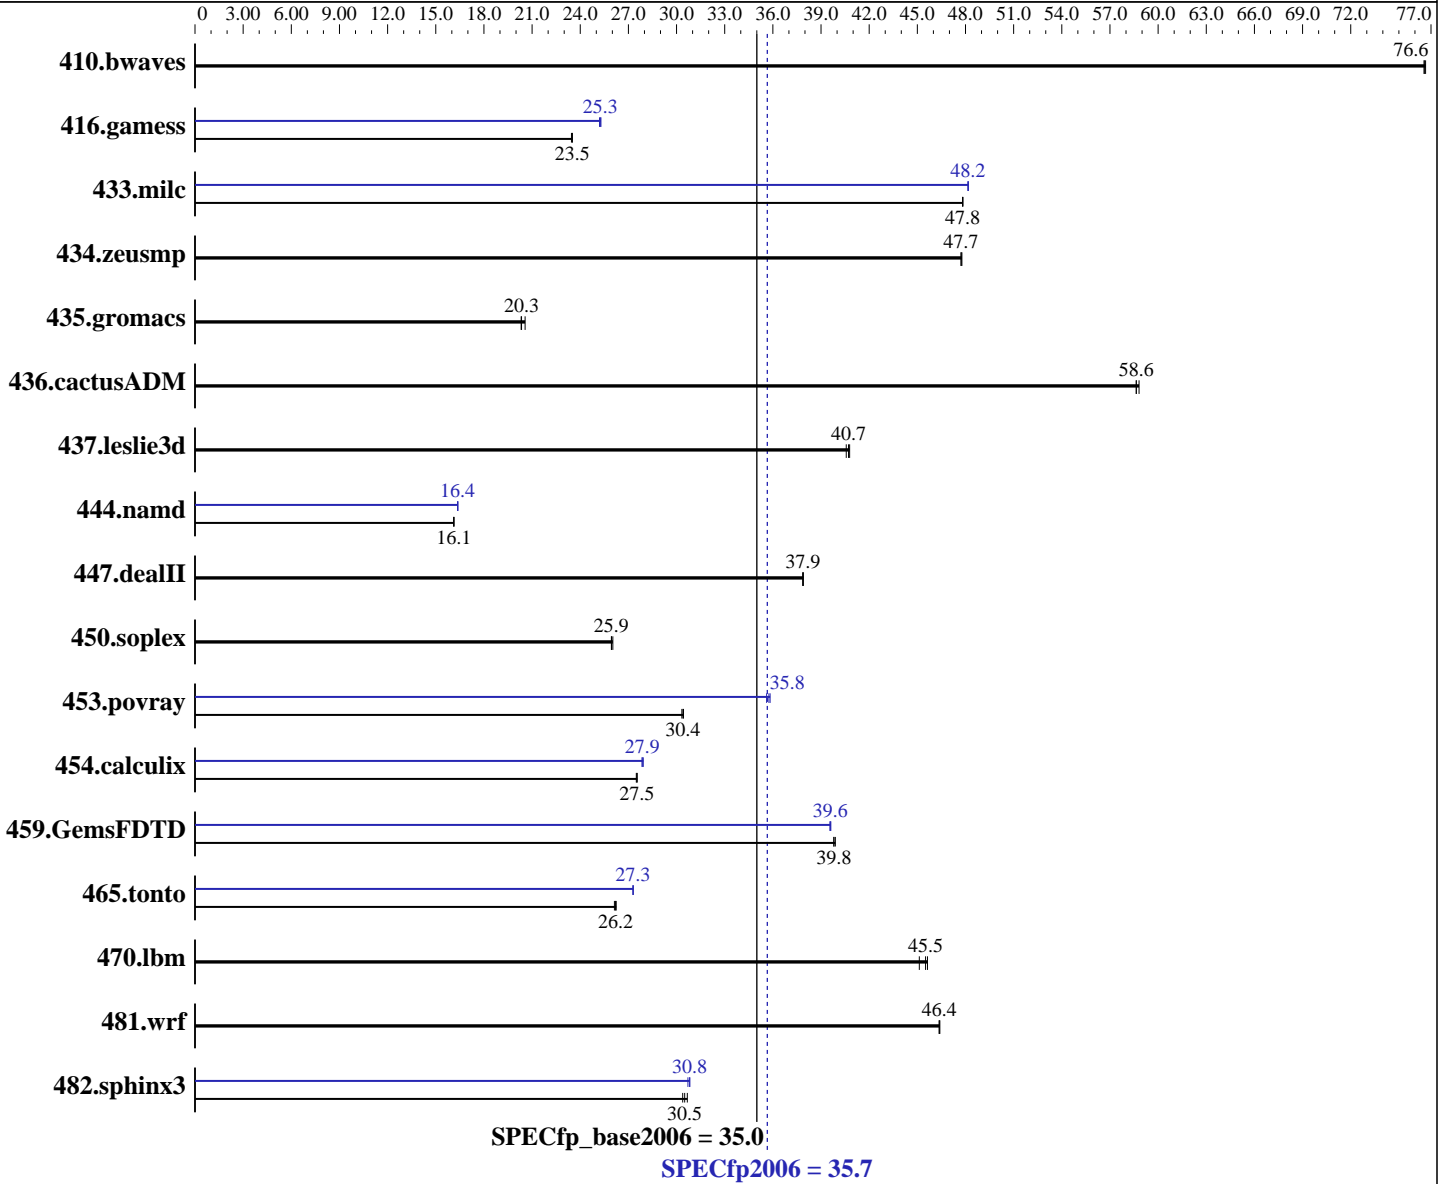

### Hardware

CPU Name: Intel Celeron G530  
 CPU Characteristics:  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server Release 6.1, Kernel 2.6.32-131.0.15.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp2006 = **35.7**

SuperServer 1017C-TF (X9SCL-F, Intel G530)

SPECfp\_base2006 = **35.0**

CPU2006 license: 001176

Test date: Apr-2012

Test sponsor: Supermicro

Hardware Availability: Apr-2011

Tested by: Supermicro

Software Availability: Oct-2011

L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC, running at 1066 MHz and CL7)  
 Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>177</b>	<b>76.6</b>	177	76.6	177	76.7	<b>177</b>	<b>76.6</b>	177	76.6	177	76.7
416.gamess	835	23.5	833	23.5	<b>833</b>	<b>23.5</b>	<b>775</b>	<b>25.3</b>	774	25.3	777	25.2
433.milc	192	47.8	192	47.8	<b>192</b>	<b>47.8</b>	191	48.2	191	48.2	<b>191</b>	<b>48.2</b>
434.zeusmp	190	47.8	<b>191</b>	<b>47.7</b>	191	47.7	190	47.8	<b>191</b>	<b>47.7</b>	191	47.7
435.gromacs	347	20.6	<b>351</b>	<b>20.3</b>	351	20.3	347	20.6	<b>351</b>	<b>20.3</b>	351	20.3
436.cactusADM	<b>204</b>	<b>58.6</b>	203	58.8	204	58.6	<b>204</b>	<b>58.6</b>	203	58.8	204	58.6
437.leslie3d	<b>231</b>	<b>40.7</b>	230	40.8	232	40.6	<b>231</b>	<b>40.7</b>	230	40.8	232	40.6
444.namd	498	16.1	<b>497</b>	<b>16.1</b>	497	16.1	490	16.4	<b>490</b>	<b>16.4</b>	490	16.4
447.dealII	<b>302</b>	<b>37.9</b>	302	37.9	302	37.9	<b>302</b>	<b>37.9</b>	302	37.9	302	37.9
450.soplex	320	26.0	<b>321</b>	<b>25.9</b>	321	25.9	320	26.0	<b>321</b>	<b>25.9</b>	321	25.9
453.povray	175	30.3	<b>175</b>	<b>30.4</b>	175	30.4	149	35.6	148	35.8	<b>149</b>	<b>35.8</b>
454.calculix	299	27.5	<b>300</b>	<b>27.5</b>	300	27.5	295	27.9	<b>296</b>	<b>27.9</b>	296	27.9
459.GemsFDTD	266	39.9	267	39.8	<b>267</b>	<b>39.8</b>	<b>268</b>	<b>39.6</b>	268	39.6	268	39.6
465.tonto	375	26.2	<b>376</b>	<b>26.2</b>	377	26.1	360	27.3	<b>361</b>	<b>27.3</b>	361	27.3
470.lbm	305	45.1	<b>302</b>	<b>45.5</b>	301	45.6	305	45.1	<b>302</b>	<b>45.5</b>	301	45.6
481.wrf	241	46.4	241	46.4	<b>241</b>	<b>46.4</b>	241	46.4	241	46.4	<b>241</b>	<b>46.4</b>
482.sphinx3	<b>639</b>	<b>30.5</b>	635	30.7	641	30.4	<b>635</b>	<b>30.7</b>	<b>632</b>	<b>30.8</b>	632	30.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/usr/cpu2006/libs/32:/home/usr/cpu2006/libs/64"

OMP\_NUM\_THREADS = "2"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp2006 = 35.7**

SuperServer 1017C-TF (X9SCL-F, Intel G530)

**SPECfp\_base2006 = 35.0**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Apr-2012  
**Hardware Availability:** Apr-2011  
**Software Availability:** Oct-2011

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp2006 = 35.7**

SuperServer 1017C-TF (X9SCL-F, Intel G530)

**SPECfp\_base2006 = 35.0**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Apr-2012  
**Hardware Availability:** Apr-2011  
**Software Availability:** Oct-2011

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp2006 = 35.7**

**SuperServer 1017C-TF (X9SCL-F, Intel G530)**

**SPECfp\_base2006 = 35.0**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Apr-2012

**Hardware Availability:** Apr-2011

**Software Availability:** Oct-2011

## Peak Optimization Flags (Continued)

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-alloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 05:16:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 May 2012.