



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = **67.3**

IBM System x3500 M4 (Intel Xeon E5-2637)

SPECfp_base2006 = **65.7**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

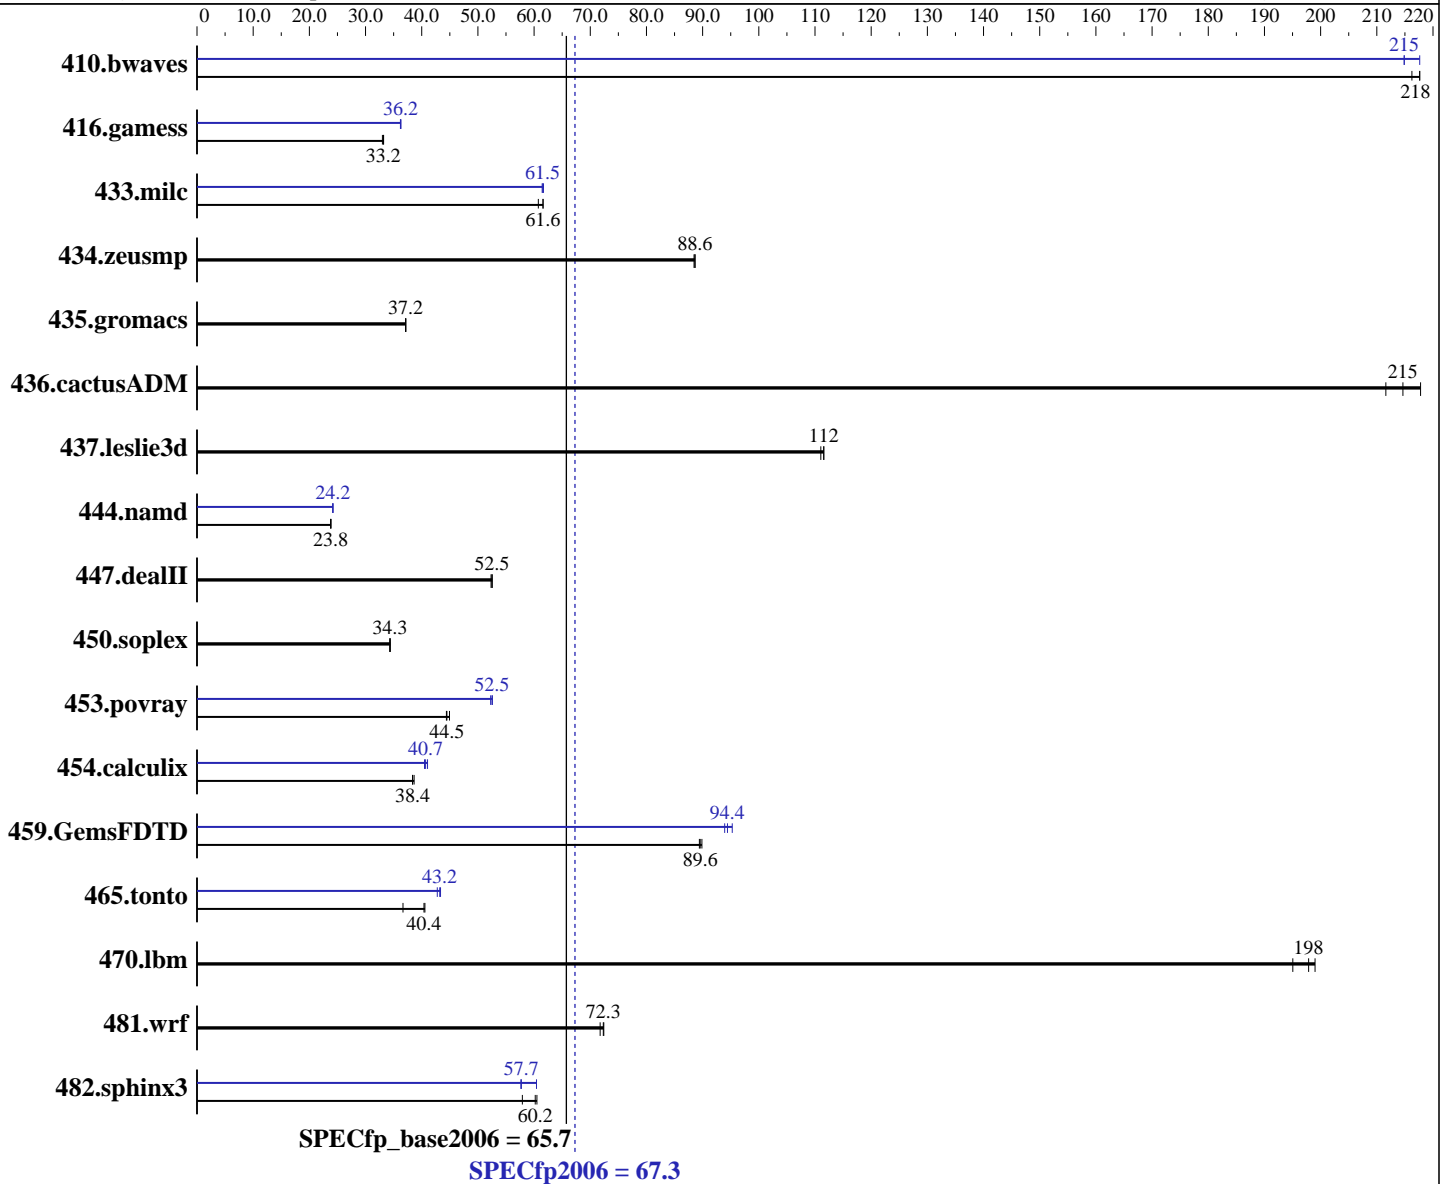

Hardware

CPU Name: Intel Xeon E5-2637
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.1 (Santiago)
 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = **67.3**

IBM System x3500 M4 (Intel Xeon E5-2637)

SPECfp_base2006 = **65.7**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

L3 Cache: 5 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (16 x 4 GB 2Rx8 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 300 GB SAS, 15000 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	62.4	218	62.4	218	62.8	216	62.4	218	63.2	215	63.2	215
416.gamess	590	33.2	593	33.0	589	33.2	541	36.2	539	36.3	541	36.2
433.milc	149	61.6	149	61.6	151	60.8	149	61.4	149	61.5	149	61.7
434.zeusmp	103	88.6	103	88.5	103	88.6	103	88.6	103	88.5	103	88.6
435.gromacs	192	37.2	192	37.2	192	37.1	192	37.2	192	37.2	192	37.1
436.cactusADM	54.9	218	56.5	212	55.7	215	54.9	218	56.5	212	55.7	215
437.leslie3d	84.3	112	84.7	111	84.3	112	84.3	112	84.7	111	84.3	112
444.namd	337	23.8	337	23.8	336	23.9	331	24.2	332	24.2	332	24.2
447.dealII	219	52.3	218	52.6	218	52.5	219	52.3	218	52.6	218	52.5
450.soplex	243	34.3	243	34.3	242	34.4	243	34.3	243	34.3	242	34.4
453.povray	118	44.9	120	44.4	120	44.5	101	52.6	101	52.5	102	52.3
454.calculix	213	38.6	215	38.4	215	38.4	201	41.0	204	40.5	203	40.7
459.GemsFDTD	118	89.6	119	89.4	118	89.9	113	93.9	111	95.3	112	94.4
465.tonto	268	36.7	244	40.4	243	40.6	227	43.3	228	43.2	230	42.8
470.lbm	69.4	198	69.0	199	70.4	195	69.4	198	69.0	199	70.4	195
481.wrf	154	72.4	154	72.3	156	71.8	154	72.4	154	72.3	156	71.8
482.sphinx3	337	57.9	324	60.2	322	60.5	323	60.4	338	57.6	338	57.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode

Platform Notes

BIOS Settings:
Operating Mode set to Maximum Performance
Sysinfo program /root/SPECcpu-v1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on x3500M4 Tue May 1 12:05:53 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 67.3

IBM System x3500 M4 (Intel Xeon E5-2637)

SPECfp_base2006 = 65.7

CPU2006 license: 11

Test date: May-2012

Test sponsor: IBM Corporation

Hardware Availability: Mar-2012

Tested by: IBM Corporation

Software Availability: Oct-2011

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2637 0 @ 3.00GHz
 2 "physical id"s (chips)
 8 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 2
siblings  : 4
physical 0: cores 0 1
physical 1: cores 0 1
cache size : 5120 KB
```

From /proc/meminfo

```
MemTotal: 66047684 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

/usr/bin/lsb_release -d

```
Red Hat Enterprise Linux Server release 6.1 (Santiago)
```

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux x3500M4 2.6.32-131.0.15.el6.x86_64 #1 SMP Tue May 10 15:42:40 EDT 2011
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Apr 30 11:38

SPEC is set to: /root/SPECcpu-v1.2

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/vg_x3500m4-lv_root
ext4 210G 71G 128G 36% /
```

Additional information from dmidecode:

Memory:

```
16x Samsung M393B5273DH0-CK0 4 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/root/SPECcpu-v1.2/libs/32:/root/SPECcpu-v1.2/libs/64"

OMP_NUM_THREADS = "4"

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 67.3

IBM System x3500 M4 (Intel Xeon E5-2637)

SPECfp_base2006 = 65.7

CPU2006 license: 11

Test date: May-2012

Test sponsor: IBM Corporation

Hardware Availability: Mar-2012

Tested by: IBM Corporation

Software Availability: Oct-2011

General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 67.3

IBM System x3500 M4 (Intel Xeon E5-2637)

SPECfp_base2006 = 65.7

CPU2006 license: 11

Test date: May-2012

Test sponsor: IBM Corporation

Hardware Availability: Mar-2012

Tested by: IBM Corporation

Software Availability: Oct-2011

Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 67.3

IBM System x3500 M4 (Intel Xeon E5-2637)

SPECfp_base2006 = 65.7

CPU2006 license: 11

Test date: May-2012

Test sponsor: IBM Corporation

Hardware Availability: Mar-2012

Tested by: IBM Corporation

Software Availability: Oct-2011

Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 67.3

IBM System x3500 M4 (Intel Xeon E5-2637)

SPECfp_base2006 = 65.7

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 08:56:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 May 2012.