



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2665, 2.40 GHz)

**SPECfp®2006 = 80.1**

**SPECfp\_base2006 = 76.9**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** May-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

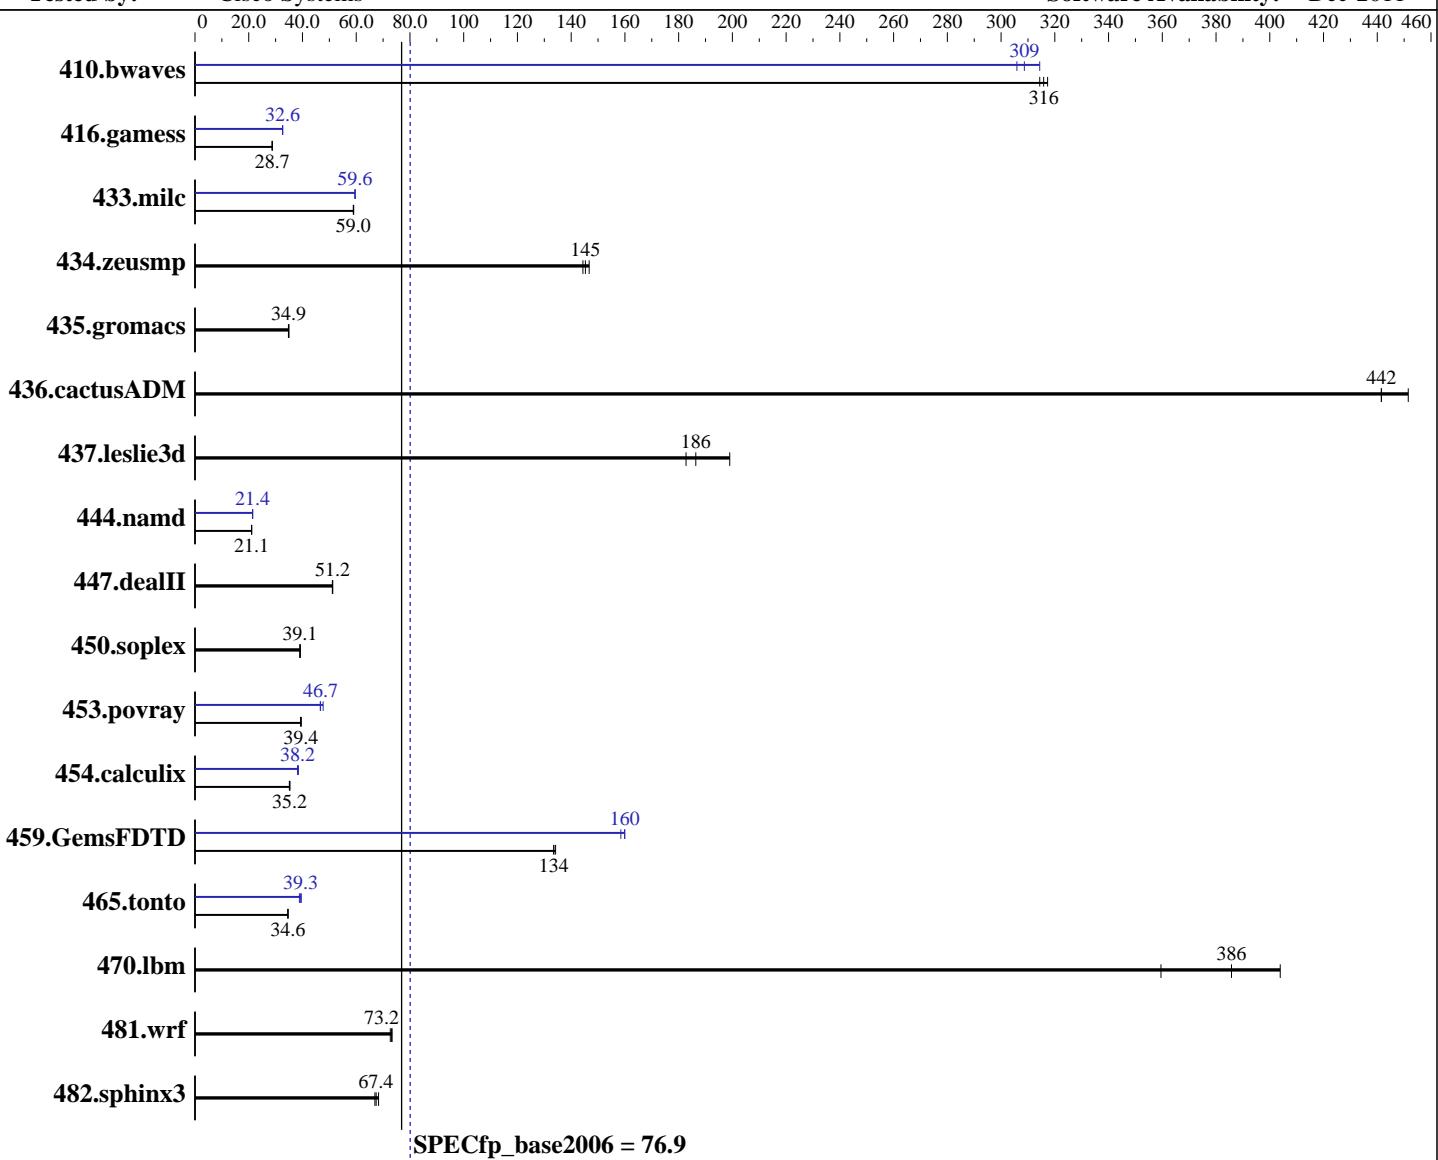

### Hardware

CPU Name: Intel Xeon E5-2665  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 Compiler: 2.6.32-220.el6.x86\_64  
 Auto Parallel: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;  
 File System: Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux  
 Software: ext4

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2665, 2.40 GHz)

**SPECfp2006 = 80.1**

**SPECfp\_base2006 = 76.9**

**CPU2006 license:** 9019

**Test date:** May-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** Jun-2012

**Tested by:** Cisco Systems

**Software Availability:** Dec-2011

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 X 300 GB 10000 RPM SAS  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	<b>43.0</b>	<b>316</b>	43.2	314	42.8	317	<b>44.0</b>	<b>309</b>	44.4	306	43.2	314
416.gamess	<b>681</b>	<b>28.7</b>	680	28.8	682	28.7	<b>600</b>	<b>32.6</b>	601	32.6	<b>600</b>	<b>32.6</b>
433.milc	155	59.1	156	58.9	<b>156</b>	<b>59.0</b>	154	59.5	154	59.6	<b>154</b>	<b>59.6</b>
434.zeusmp	63.0	144	<b>62.6</b>	<b>145</b>	62.0	147	<b>63.0</b>	144	<b>62.6</b>	<b>145</b>	62.0	147
435.gromacs	204	34.9	205	34.8	<b>205</b>	<b>34.9</b>	204	34.9	205	34.8	<b>205</b>	<b>34.9</b>
436.cactusADM	27.1	442	<b>27.1</b>	<b>442</b>	26.5	452	<b>27.1</b>	442	<b>27.1</b>	<b>442</b>	26.5	452
437.leslie3d	47.2	199	51.4	183	<b>50.4</b>	<b>186</b>	47.2	199	51.4	183	<b>50.4</b>	<b>186</b>
444.namd	<b>380</b>	<b>21.1</b>	381	21.1	380	21.1	<b>374</b>	<b>21.4</b>	374	21.4	374	21.5
447.dealII	224	51.1	223	51.2	<b>223</b>	<b>51.2</b>	224	51.1	223	51.2	<b>223</b>	<b>51.2</b>
450.soplex	213	39.2	<b>213</b>	<b>39.1</b>	214	39.0	<b>213</b>	39.2	<b>213</b>	<b>39.1</b>	214	39.0
453.povray	135	39.5	<b>135</b>	<b>39.4</b>	135	39.3	<b>114</b>	<b>46.7</b>	114	46.6	112	47.7
454.calculix	<b>235</b>	<b>35.2</b>	233	35.4	235	35.1	<b>216</b>	38.2	214	38.5	<b>216</b>	<b>38.2</b>
459.GemsFDTD	79.1	134	79.5	134	<b>79.5</b>	<b>134</b>	<b>66.3</b>	<b>160</b>	66.3	160	66.9	158
465.tonto	285	34.6	284	34.6	<b>284</b>	<b>34.6</b>	249	39.5	253	38.9	<b>250</b>	<b>39.3</b>
470.lbm	34.0	404	38.2	360	<b>35.6</b>	<b>386</b>	34.0	404	38.2	360	<b>35.6</b>	<b>386</b>
481.wrf	154	72.7	<b>153</b>	<b>73.2</b>	152	73.4	154	72.7	<b>153</b>	<b>73.2</b>	152	73.4
482.sphinx3	<b>289</b>	<b>67.4</b>	291	67.0	285	68.3	<b>289</b>	<b>67.4</b>	291	67.0	285	68.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:

Processor C6 Report set to Disabled

Processor C1E set to Disabled

CPU Performance set to HPC

LV DDR Mode set to Performance-mode

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on localhost.localdomain Tue May 1 19:16:47 2012

This section contains SUT (System Under Test) info as seen by  
 Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2665, 2.40 GHz)

**SPECfp2006 = 80.1**

**SPECfp\_base2006 = 76.9**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** May-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

## Platform Notes (Continued)

some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2665 0 @ 2.40GHz
        2 "physical id"s (chips)
        16 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 8
        siblings : 8
        physical 0: cores 0 1 2 3 4 5 6 7
        physical 1: cores 0 1 2 3 4 5 6 7
    cache size : 20480 KB
```

```
From /proc/meminfo
    MemTotal:      132101936 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
    Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
    Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
    EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 1 19:10
```

```
SPEC is set to: /opt/cpu2006-1.2
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sdal      ext4  275G  8.0G  253G   4%  /
```

```
Additional information from dmidecode:
```

```
Memory:
    16x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 1 rank
```

```
(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"

OMP\_NUM\_THREADS = "16"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems	<b>SPECfp2006 =</b>	<b>80.1</b>
Cisco UCS B200 M3 (Intel Xeon E5-2665, 2.40 GHz)	<b>SPECfp_base2006 =</b>	<b>76.9</b>
<b>CPU2006 license:</b> 9019	<b>Test date:</b>	May-2012
<b>Test sponsor:</b> Cisco Systems	<b>Hardware Availability:</b>	Jun-2012
<b>Tested by:</b> Cisco Systems	<b>Software Availability:</b>	Dec-2011

## General Notes (Continued)

Intel HT Technology = disable  
Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2665, 2.40 GHz)

**SPECfp2006 = 80.1**

**CPU2006 license:** 9019

**Test date:** May-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** Jun-2012

**Tested by:** Cisco Systems

**Software Availability:** Dec-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2665, 2.40 GHz)

**SPECfp2006 = 80.1**

**CPU2006 license:** 9019

**Test date:** May-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** Jun-2012

**Tested by:** Cisco Systems

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

447.deallII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems	<b>SPECfp2006 =</b>	<b>80.1</b>
Cisco UCS B200 M3 (Intel Xeon E5-2665, 2.40 GHz)	<b>SPECfp_base2006 =</b>	<b>76.9</b>
<b>CPU2006 license:</b> 9019	<b>Test date:</b>	May-2012
<b>Test sponsor:</b> Cisco Systems	<b>Hardware Availability:</b>	Jun-2012
<b>Tested by:</b> Cisco Systems	<b>Software Availability:</b>	Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 08:50:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 May 2012.