



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 76.1

IBM System x3530 M4 (Intel Xeon E5-2470)

SPECfp_base2006 = 72.7

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

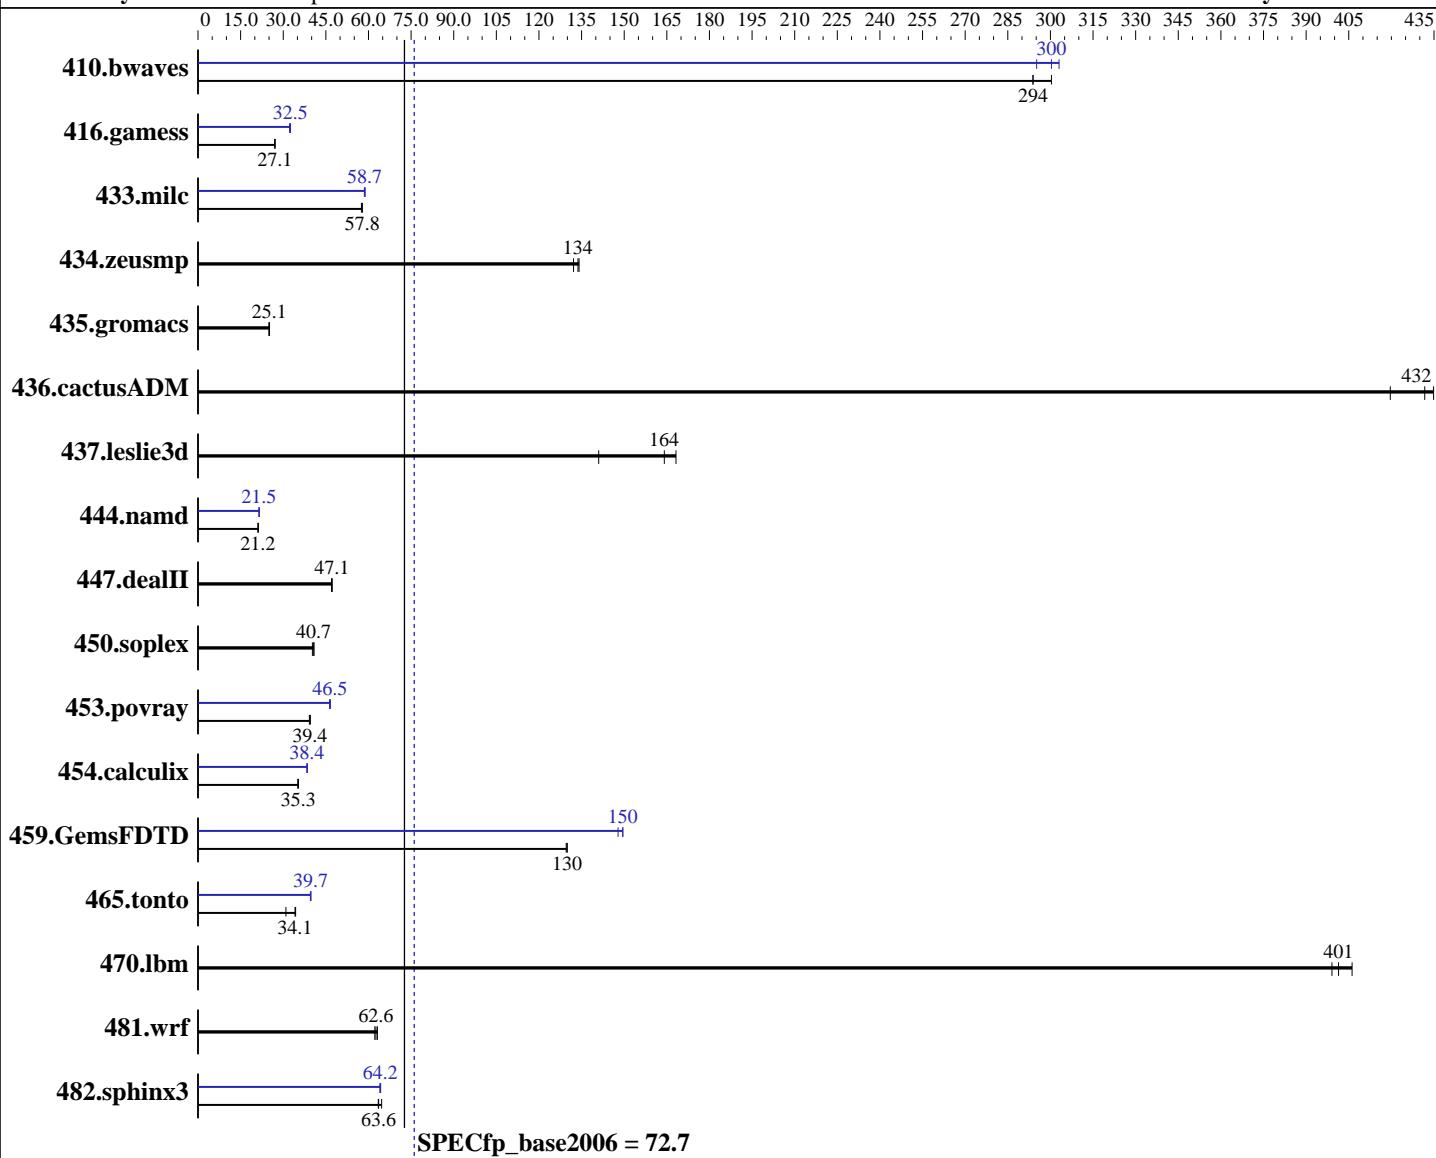

Hardware

CPU Name: Intel Xeon E5-2470
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 Compiler: 2.6.32-220.el6.x86_64
 Auto Parallel: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 File System: Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Software: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3530 M4 (Intel Xeon E5-2470)

SPECfp2006 = 76.1

CPU2006 license: 11 **Test date:** May-2012
Test sponsor: IBM Corporation **Hardware Availability:** Jun-2012
Tested by: IBM Corporation **Software Availability:** Dec-2011

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	46.2	294	46.2	294	45.2	300	44.8	303	46.0	295	45.2	300
416.gamess	723	27.1	725	27.0	722	27.1	608	32.2	602	32.5	601	32.6
433.milc	160	57.5	159	57.8	159	57.8	156	58.8	156	58.7	157	58.6
434.zeusmp	68.9	132	68.1	134	67.9	134	68.9	132	68.1	134	67.9	134
435.gromacs	286	25.0	285	25.1	284	25.2	286	25.0	285	25.1	284	25.2
436.cactusADM	28.5	420	27.7	432	27.5	435	28.5	420	27.7	432	27.5	435
437.leslie3d	66.7	141	57.3	164	55.9	168	66.7	141	57.3	164	55.9	168
444.namd	379	21.2	379	21.2	379	21.2	373	21.5	373	21.5	373	21.5
447.dealII	243	47.0	243	47.1	242	47.2	243	47.0	243	47.1	242	47.2
450.soplex	205	40.7	204	40.8	207	40.3	205	40.7	204	40.8	207	40.3
453.povray	135	39.5	136	39.2	135	39.4	114	46.5	115	46.3	114	46.5
454.calculix	235	35.1	234	35.3	234	35.3	215	38.4	215	38.5	215	38.3
459.GemsFDTD	81.7	130	81.7	130	81.9	130	71.8	148	71.0	150	71.0	150
465.tonto	288	34.1	286	34.4	318	30.9	248	39.8	248	39.7	249	39.6
470.lbm	34.2	401	33.8	406	34.4	399	34.2	401	33.8	406	34.4	399
481.wrf	178	62.6	177	63.1	180	62.2	178	62.6	177	63.1	180	62.2
482.sphinx3	307	63.6	302	64.6	307	63.5	303	64.3	304	64.2	305	64.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
 Zone reclaim mode enabled with:
 echo 1 > /proc/sys/vm/zone_reclaim_mode

Platform Notes

BIOS Settings:

Operating Mode set to Maximum Performance

Sysinfo program /root/SPECcpu-v1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 ## 6f2ebdff5032aaa42e583f96b07f99d3

running on localhost.localdomain Thu May 10 00:59:24 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 76.1

IBM System x3530 M4 (Intel Xeon E5-2470)

SPECfp_base2006 = 72.7

CPU2006 license: 11

Test date: May-2012

Test sponsor: IBM Corporation

Hardware Availability: Jun-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2470 0 @ 2.30GHz
  2 "physical id"s (chips)
  32 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      99042040 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 9 11:59
```

```
SPEC is set to: /root/SPECcpu-v1.2
Filesystem      Type   Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3530m4-lv_root
                  ext4   133G   15G  111G  12%  /
```

Additional information from dmidecode:

```
Memory:
 12x Samsung M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/root/SPECcpu-v1.2/libs/32:/root/SPECcpu-v1.2/libs/64"

OMP_NUM_THREADS = "16"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	76.1
IBM System x3530 M4 (Intel Xeon E5-2470)	SPECfp_base2006 =	72.7
CPU2006 license: 11	Test date:	May-2012
Test sponsor: IBM Corporation	Hardware Availability:	Jun-2012
Tested by: IBM Corporation	Software Availability:	Dec-2011

General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
  447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
      481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 76.1

IBM System x3530 M4 (Intel Xeon E5-2470)

SPECfp_base2006 = 72.7

CPU2006 license: 11

Test date: May-2012

Test sponsor: IBM Corporation

Hardware Availability: Jun-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias
-parallel

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 76.1

IBM System x3530 M4 (Intel Xeon E5-2470)

SPECfp_base2006 = 72.7

CPU2006 license: 11

Test date: May-2012

Test sponsor: IBM Corporation

Hardware Availability: Jun-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
 -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
 -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
 -inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
 -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 76.1

IBM System x3530 M4 (Intel Xeon E5-2470)

SPECfp_base2006 = 72.7

CPU2006 license: 11

Test date: May-2012

Test sponsor: IBM Corporation

Hardware Availability: Jun-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 06:14:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 June 2012.