



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp®_rate2006 = 388

Huawei BH622 V2 (Intel Xeon E5-2650L)

SPECfp_rate_base2006 = 380

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: May-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

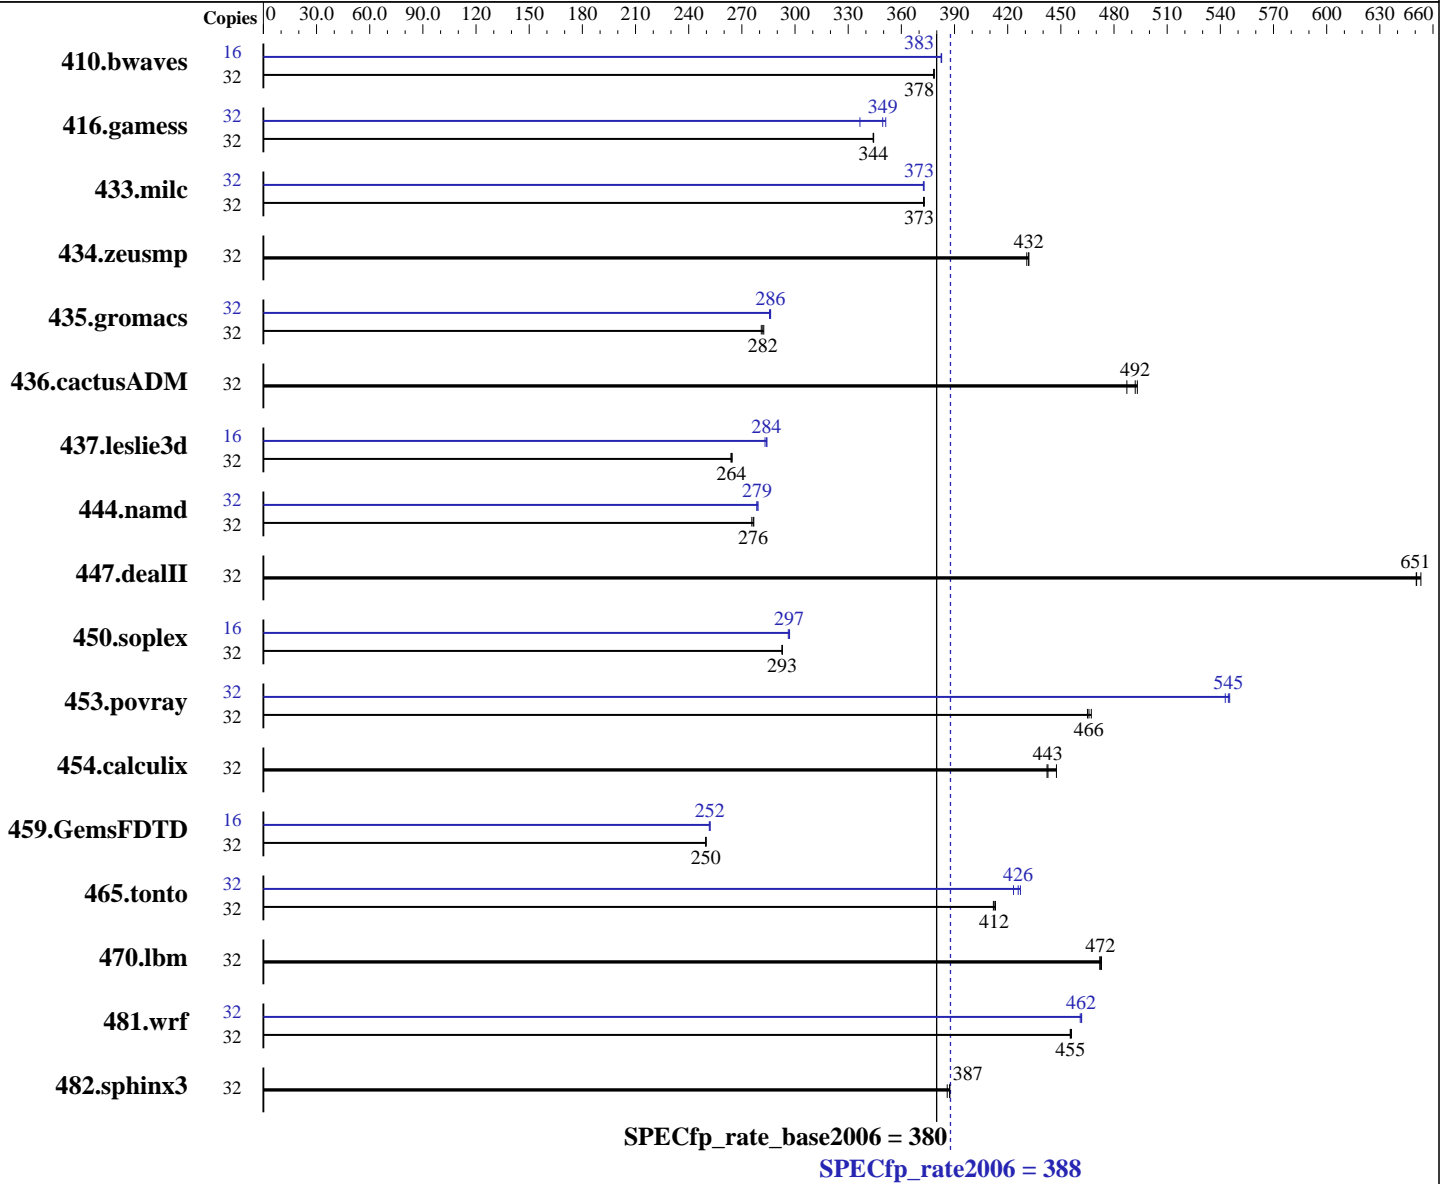

Hardware

CPU Name: Intel Xeon E5-2650L
 CPU Characteristics: Intel Turbo Boost Technology up to 2.30 GHz
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 388

Huawei BH622 V2 (Intel Xeon E5-2650L)

SPECfp_rate_base2006 = 380

CPU2006 license: 3175

Test date: May-2012

Test sponsor: Huawei

Hardware Availability: Mar-2012

Tested by: Huawei

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1150	378	1149	379	<u>1149</u>	<u>378</u>	16	<u>568</u>	<u>383</u>	568	383	568	383
416.gamess	32	<u>1820</u>	<u>344</u>	1821	344	1820	344	32	<u>1793</u>	<u>349</u>	1861	337	1784	351
433.milc	32	788	373	788	373	<u>788</u>	<u>373</u>	32	789	372	<u>788</u>	<u>373</u>	788	373
434.zeusmp	32	676	431	<u>674</u>	<u>432</u>	674	432	32	676	431	<u>674</u>	<u>432</u>	674	432
435.gromacs	32	809	282	<u>811</u>	<u>282</u>	813	281	32	800	286	<u>799</u>	<u>286</u>	798	286
436.cactusADM	32	785	487	775	493	<u>777</u>	<u>492</u>	32	785	487	775	493	<u>777</u>	<u>492</u>
437.leslie3d	32	1140	264	<u>1139</u>	<u>264</u>	1137	265	16	529	284	531	283	<u>530</u>	<u>284</u>
444.namd	32	927	277	<u>928</u>	<u>276</u>	931	276	32	<u>921</u>	<u>279</u>	922	278	919	279
447.dealII	32	<u>563</u>	<u>651</u>	560	653	563	651	32	<u>563</u>	<u>651</u>	560	653	563	651
450.soplex	32	911	293	912	293	<u>911</u>	<u>293</u>	16	451	296	<u>450</u>	<u>297</u>	449	297
453.povray	32	364	467	366	465	<u>365</u>	<u>466</u>	32	314	543	<u>313</u>	<u>545</u>	312	545
454.calculix	32	597	442	<u>596</u>	<u>443</u>	590	448	32	597	442	<u>596</u>	<u>443</u>	590	448
459.GemsFDTD	32	1360	250	<u>1360</u>	<u>250</u>	1359	250	16	674	252	<u>674</u>	<u>252</u>	675	252
465.tonto	32	764	412	762	413	<u>764</u>	<u>412</u>	32	737	427	744	423	<u>739</u>	<u>426</u>
470.lbm	32	930	473	932	472	<u>931</u>	<u>472</u>	32	930	473	932	472	<u>931</u>	<u>472</u>
481.wrf	32	<u>785</u>	<u>455</u>	784	456	785	455	32	<u>774</u>	<u>462</u>	775	461	774	462
482.sphinx3	32	1616	386	1610	387	<u>1610</u>	<u>387</u>	32	1616	386	1610	387	<u>1610</u>	<u>387</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 388

Huawei BH622 V2 (Intel Xeon E5-2650L)

SPECfp_rate_base2006 = 380

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

Platform Notes

Sysinfo program /spec/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3
running on RH62-com Tue May 8 18:28:53 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2650L 0 @ 1.80GHz
 2 "physical id"s (chips)
 32 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

From /proc/meminfo

```
MemTotal: 132124016 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux RH62-com 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 29 07:34

SPEC is set to: /spec

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdal ext4 289G 16G 258G 6% /
```

Additional information from dmidecode:

```
Memory:
16x Samsung M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank
```

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"

Binaries compiled on a system with 2 x Xeon X5650 CPU + 16GB memory

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 388

Huawei BH622 V2 (Intel Xeon E5-2650L)

SPECfp_rate_base2006 = 380

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2012
Hardware Availability: Mar-2012
Software Availability: Dec-2011

General Notes (Continued)

using RHEL 6.2

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 388

Huawei BH622 V2 (Intel Xeon E5-2650L)

SPECfp_rate_base2006 = 380

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

Base Optimization Flags (Continued)

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 388

Huawei BH622 V2 (Intel Xeon E5-2650L)

SPECfp_rate_base2006 = 380

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
-opt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo -O3 -no-prec-div
-prof-use(pass 2) -xSSE4.2 -opt-prefetch -static
-auto-ilp32 -opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 388

Huawei BH622 V2 (Intel Xeon E5-2650L)

SPECfp_rate_base2006 = 380

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revD.20120509.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revD.20120509.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 08:14:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 June 2012.