SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120d-2M (Intel Xeon E5-2650)

SPECfp®2006 = 72.0

SPECfp_base2006 = 68.6

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: May-2012
Hardware Availability: Apr-2012
Software Availability: Dec-2011

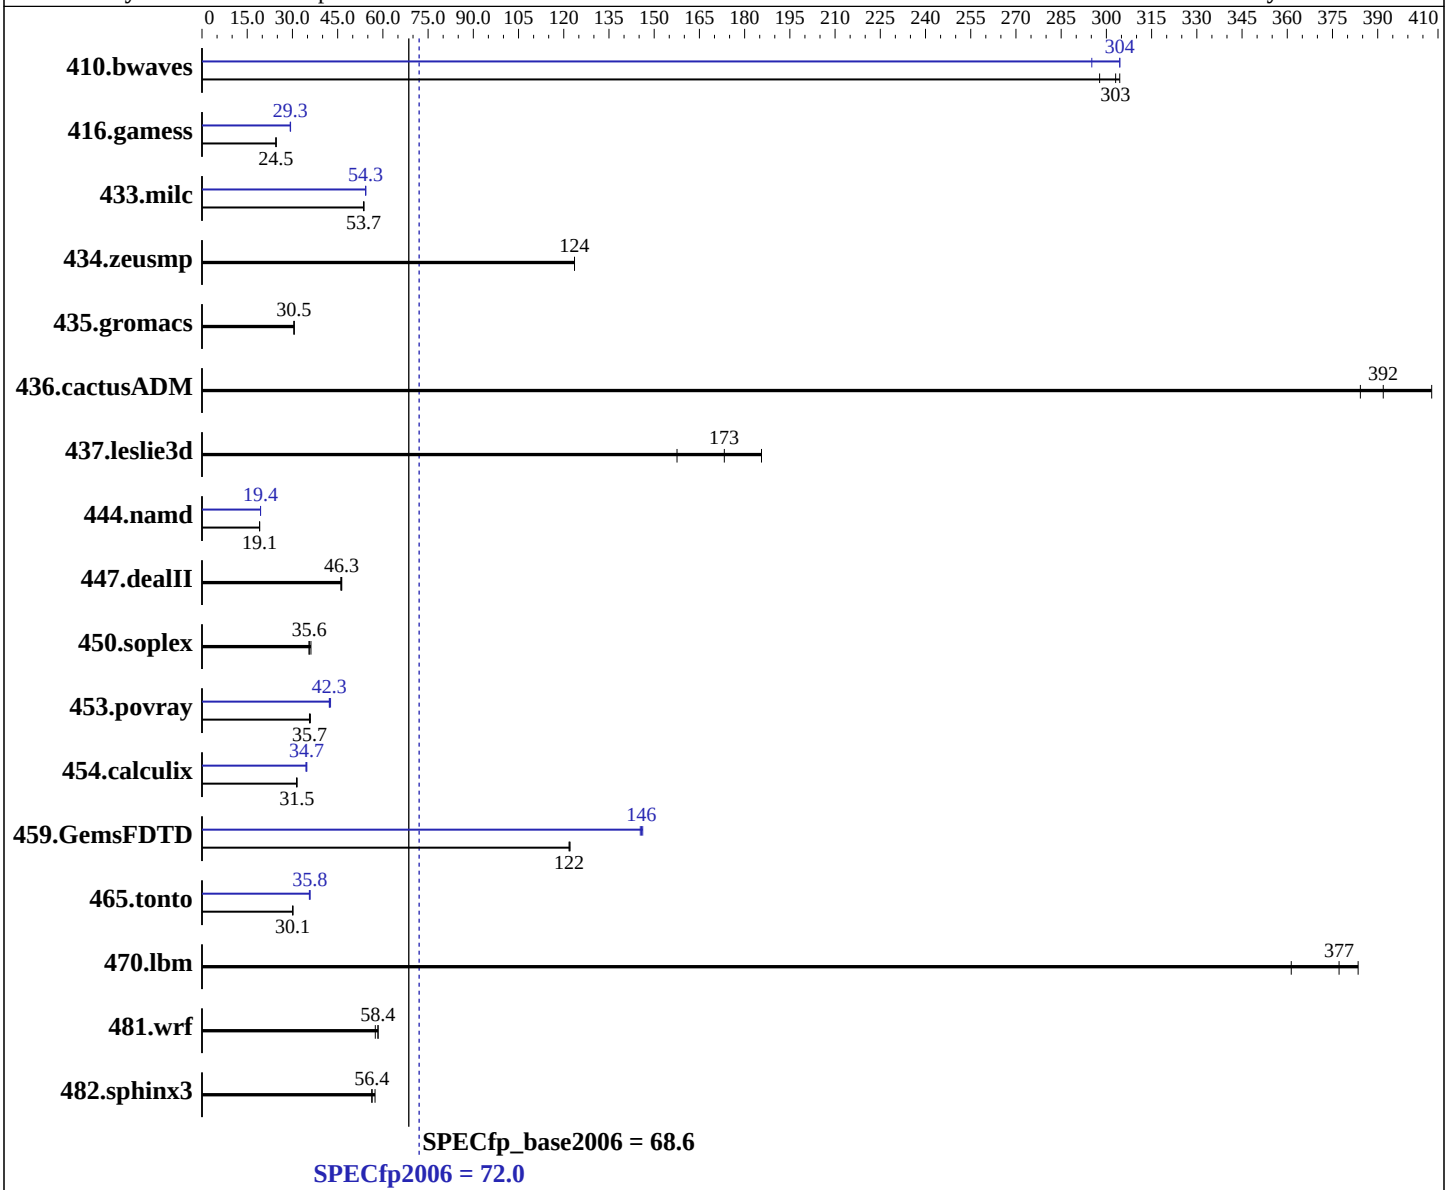

Hardware

CPU Name:	Intel Xeon E5-2650
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.2.273 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120d-2M (Intel Xeon E5-2650)

SPECfp2006 = 72.0

SPECfp_base2006 = 68.6

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: May-2012
Hardware Availability: Apr-2012
Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3L-12800R-11, ECC)
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	45.6	298	**44.8**	**303**	44.6	304	**44.6**	**304**	46.0	295	44.6	304
416.gamess	**798**	**24.5**	796	24.6	799	24.5	668	29.3	666	29.4	**668**	**29.3**
433.milc	171	53.7	171	53.6	**171**	**53.7**	169	54.3	169	54.3	**169**	**54.3**
434.zeusmp	73.6	124	73.6	124	**73.6**	**124**	73.6	124	73.6	124	**73.6**	**124**
435.gromacs	**234**	**30.5**	234	30.5	234	30.5	**234**	**30.5**	234	30.5	234	30.5
436.cactusADM	31.1	384	29.3	408	**30.5**	**392**	31.1	384	29.3	408	**30.5**	**392**
437.leslie3d	59.7	158	50.6	186	**54.3**	**173**	59.7	158	50.6	186	**54.3**	**173**
444.namd	**420**	**19.1**	420	19.1	420	19.1	413	19.4	413	19.4	**413**	**19.4**
447.dealII	**247**	**46.3**	247	46.3	248	46.0	**247**	**46.3**	247	46.3	248	46.0
450.soplex	231	36.1	235	35.5	**235**	**35.6**	231	36.1	235	35.5	**235**	**35.6**
453.povray	149	35.6	148	36.0	**149**	**35.7**	**126**	**42.3**	125	42.6	126	42.2
454.calculix	262	31.5	**262**	**31.5**	263	31.3	**238**	**34.7**	239	34.5	238	34.7
459.GemsFDTD	87.1	122	86.9	122	**87.1**	**122**	72.6	146	**72.8**	**146**	73.0	145
465.tonto	**327**	**30.1**	327	30.1	327	30.1	275	35.8	276	35.6	**275**	**35.8**
470.lbm	38.0	361	35.8	384	**36.4**	**377**	38.0	361	35.8	384	**36.4**	**377**
481.wrf	**191**	**58.4**	191	58.4	194	57.5	**191**	**58.4**	191	58.4	194	57.5
482.sphinx3	**345**	**56.4**	340	57.4	346	56.3	**345**	**56.4**	340	57.4	346	56.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
 Energy Performance: Performance
 Memory Voltage: 1.5 V
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"
```

Continued on next page

General Notes (Continued)

```
OMP_NUM_THREADS = "16"

 Added glibc-static-2.12-1.47.el6.x86_64.rpm
 to enable static linking

 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
     410.bwaves: -DSPEC_CPU_LP64
     416.gamess: -DSPEC_CPU_LP64
       433.milc: -DSPEC_CPU_LP64
     434.zeusmp: -DSPEC_CPU_LP64
     435.gromacs: -DSPEC_CPU_LP64 -nofor_main
  436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
     437.leslie3d: -DSPEC_CPU_LP64
       444.namd: -DSPEC_CPU_LP64
      447.dealII: -DSPEC_CPU_LP64
      450.soplex: -DSPEC_CPU_LP64
      453.povray: -DSPEC_CPU_LP64
      454.calculix: -DSPEC_CPU_LP64 -nofor_main
  459.GemsFDTD: -DSPEC_CPU_LP64
        465.tonto: -DSPEC_CPU_LP64
         470.lbm: -DSPEC_CPU_LP64
         481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
     482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-static -auto-ilp32 -ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html
http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml
http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 06:23:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 June 2012.