SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120d-2M (Intel Xeon E5-2650)

SPECint®_rate2006 = 277

SPECint_rate_base2006 = 265

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: May-2012
Hardware Availability: Apr-2012
Software Availability: Dec-2011

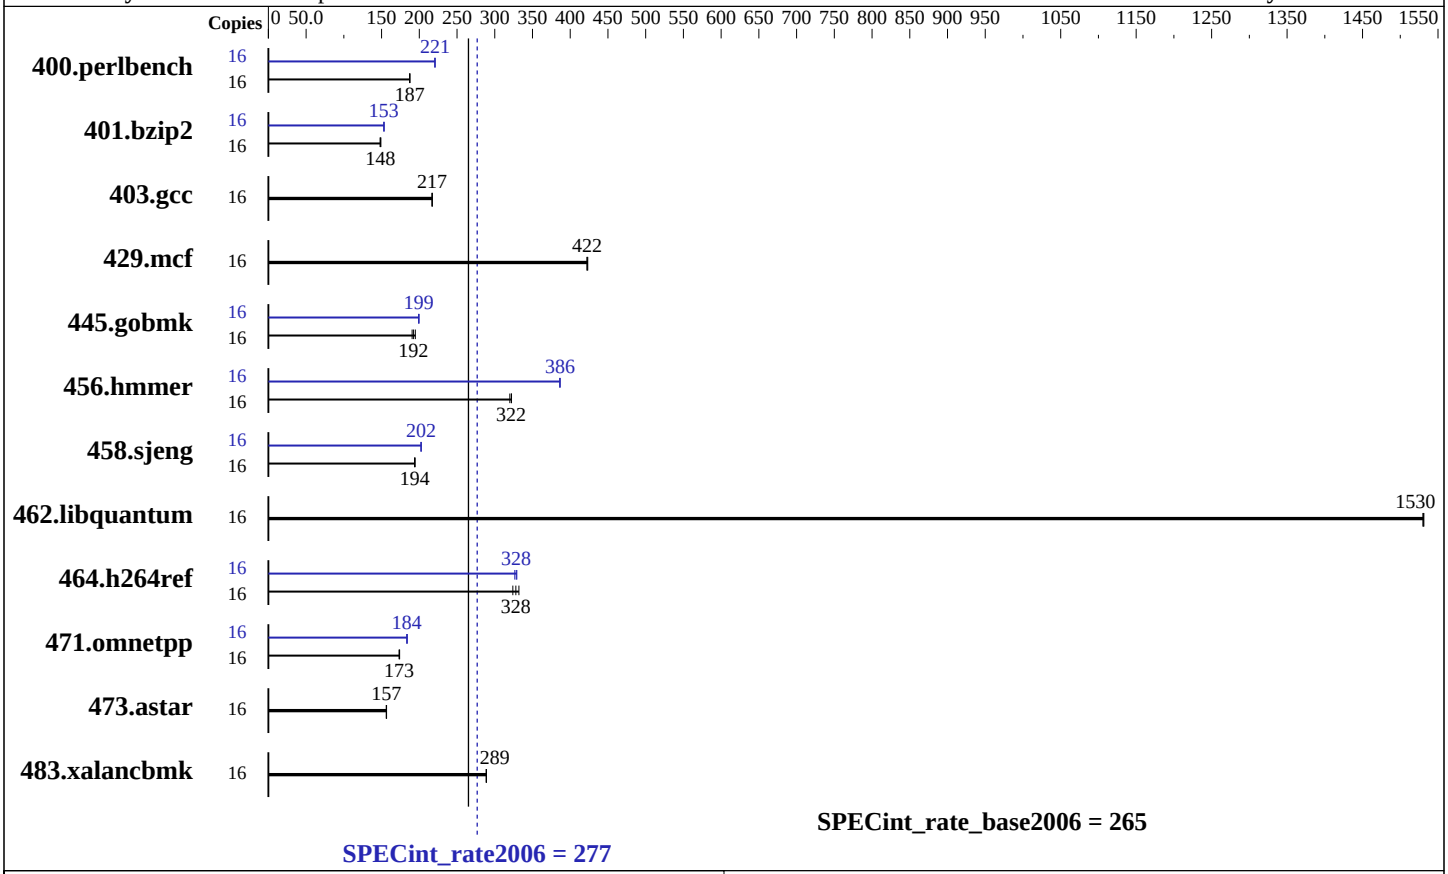

Hardware

CPU Name:	Intel Xeon E5-2650
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	8 cores, 1 chip, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	64 GB (8 x 8 GB 2Rx4 PC3L-12800R-11, ECC)
Disk Subsystem:	1 x 250 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux;
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120d-2M (Intel Xeon E5-2650)

SPECint_rate2006 = 277

SPECint_rate_base2006 = 265

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: May-2012
Hardware Availability: Apr-2012
Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	834	187	**834**	**187**	835	187	16	**708**	**221**	709	221	708	221
401.bzip2	16	**1040**	**148**	1042	148	1035	149	16	**1008**	**153**	1009	153	1007	153
403.gcc	16	**593**	**217**	594	217	593	217	16	**593**	**217**	594	217	593	217
429.mcf	16	345	423	**345**	**422**	346	422	16	345	423	**345**	**422**	346	422
445.gobmk	16	862	195	881	190	**872**	**192**	16	843	199	841	200	**841**	**199**
456.hmmer	16	467	320	**464**	**322**	463	322	16	386	387	**386**	**386**	387	386
458.sjeng	16	**997**	**194**	999	194	997	194	16	**957**	**202**	957	202	956	202
462.libquantum	16	217	1530	216	1530	**217**	**1530**	16	217	1530	216	1530	**217**	**1530**
464.h264ref	16	**1080**	**328**	1066	332	1093	324	16	1075	329	**1078**	**328**	1084	327
471.omnetpp	16	575	174	577	173	**576**	**173**	16	**545**	**184**	545	184	543	184
473.astar	16	**718**	**157**	717	157	719	156	16	**718**	**157**	717	157	719	156
483.xalancbmk	16	382	289	383	289	**382**	**289**	16	382	289	383	289	**382**	**289**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
 Energy Performance: Performance
 Memory Voltage: 1.5 V
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

 Added glibc-static-2.12-1.47.el6.x86_64.rpm
 to enable static linking

 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
```

Continued on next page

General Notes (Continued)

```
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m32
```

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

Continued on next page

Peak Compiler Invocation (Continued)

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html
http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml
http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 06:17:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 June 2012.